


The RAPP/1 organism, on one page

Read it top (6) to bottom (0). Left: what comes in. Right: what goes out or across.

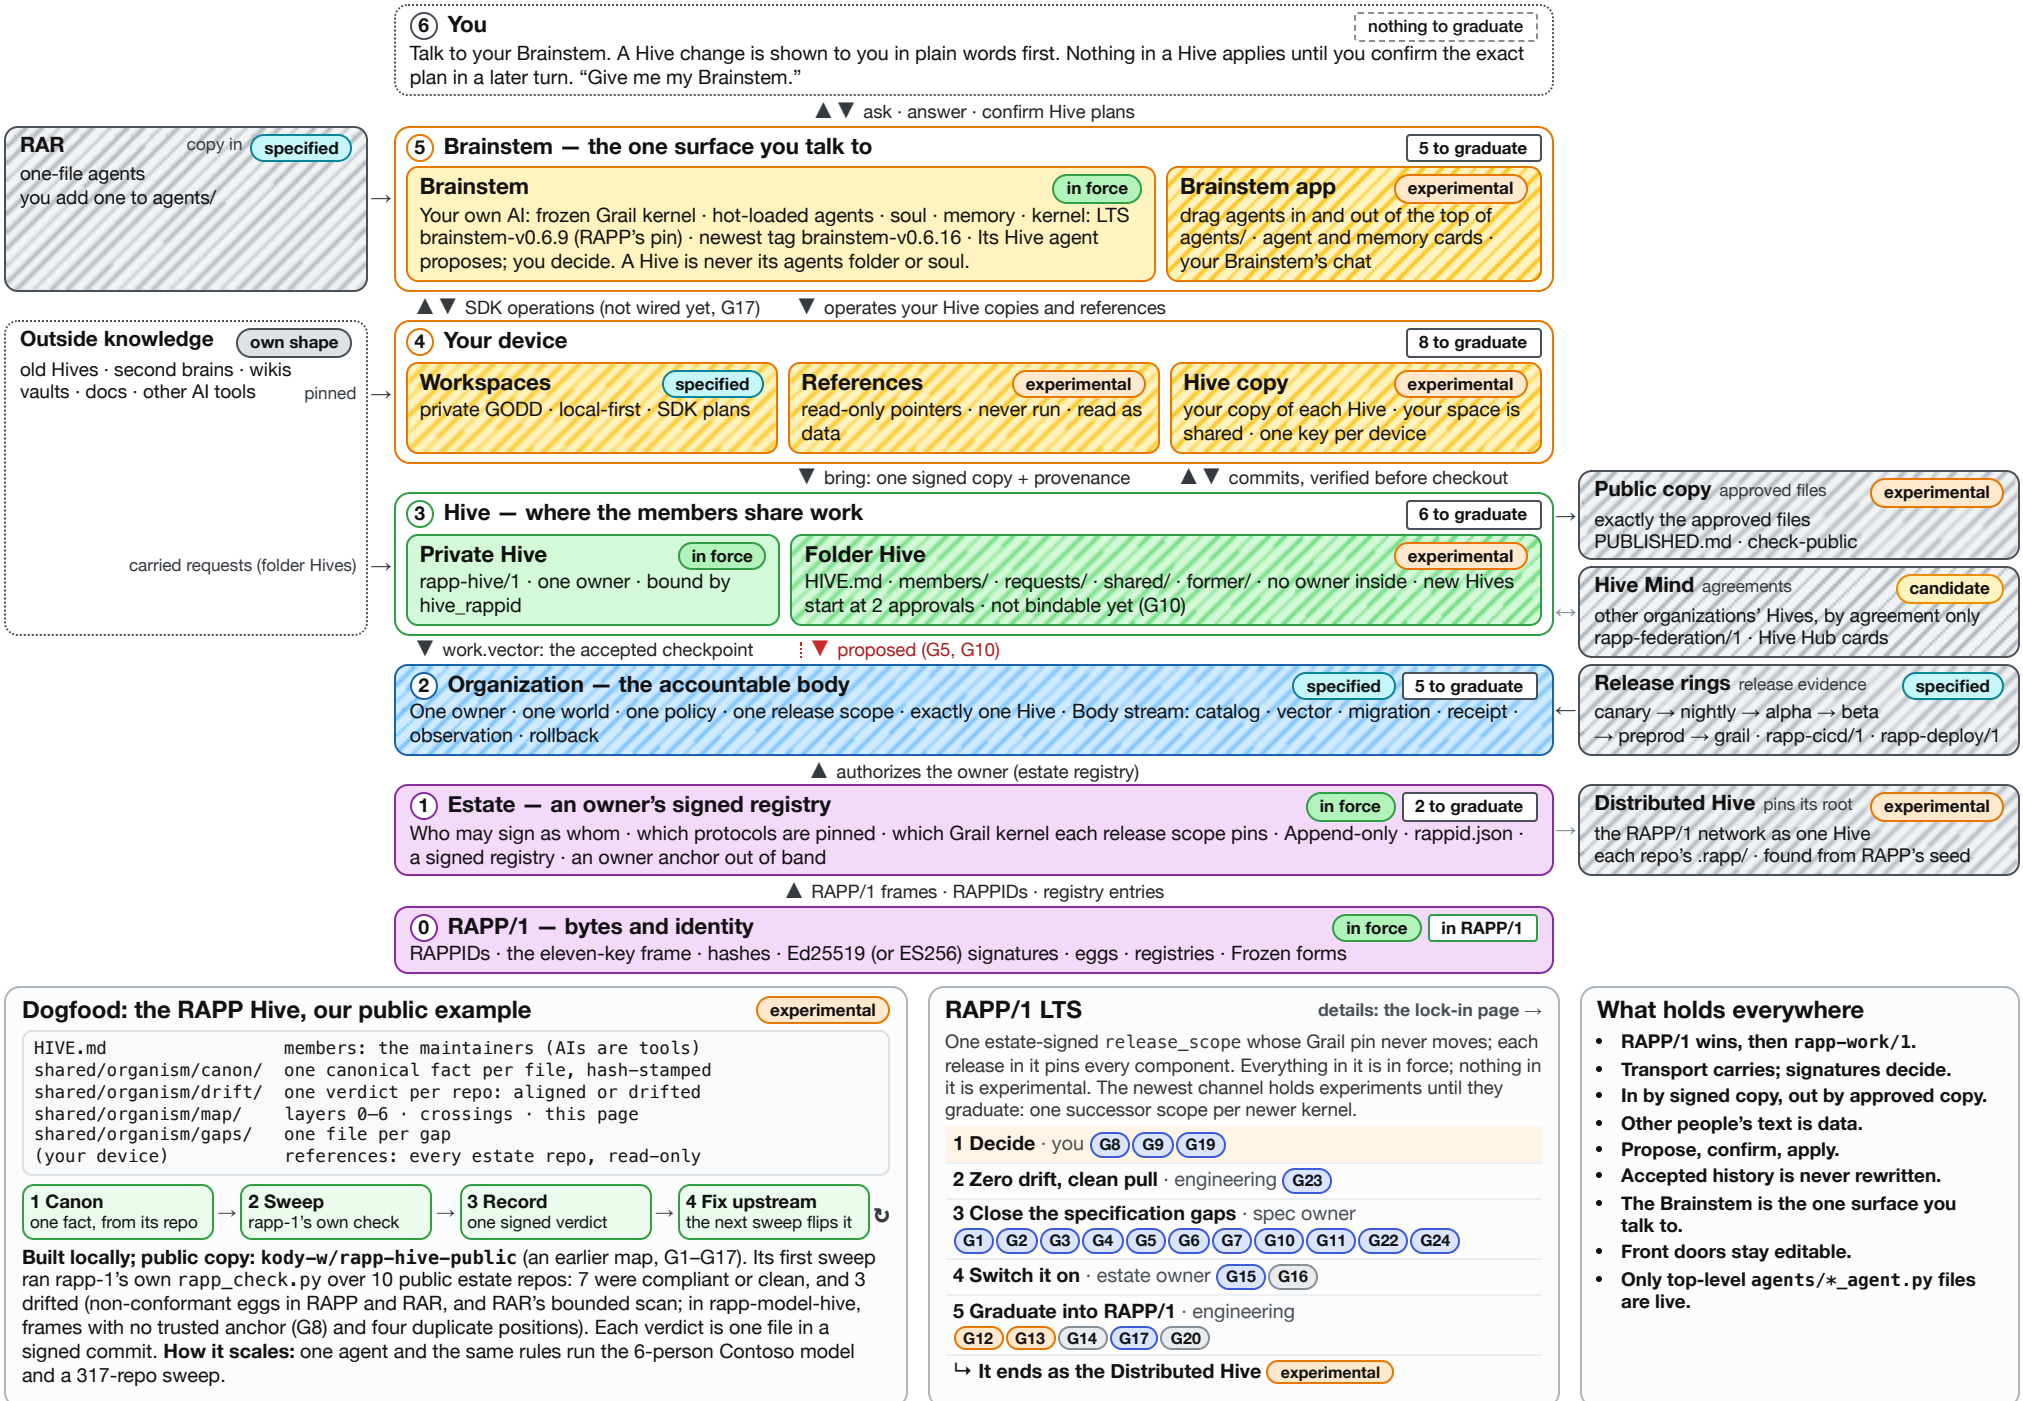

RAPP/1 LTS: what it takes to lock the whole thing

RAPP/1 is the one LTS release people pull. Five phases lock it, in order, with the owner's decisions first; it ends as a distributed Hive.

in force

specified

experimental

candidate

planned

gap

idea

open

proposed

own shape

Your decisions first · phase 1, Decide · you, about an hour

1. accept or refuse RAPP proposal 0002 ([G19](#)), Tier 2 loading: a draft on experimental/proposal-0002-tier2-parity
2. ratify the RAPP Work Constitution and its Part V ([G8](#), [G9](#))
3. done: RAPP proposal 0001 and its amendment are merged (kody-w/RAPP#119, kody-w/RAPP#124), so RAPP's Constitution says only top-level agents are live

RAPP/1 LTS is

- One estate-signed `release_scope` whose Grail pin never moves; each release in it pins every component.
- Everything in it is in force; nothing in it is experimental.
- The newest channel holds experiments until they graduate: one successor scope per newer kernel.

It pins: [the LTS kernel brainstem-v0.6.9](#) [rapp-hive/1](#) [rapp-work/1](#) [RAPP Workspace/1](#) [rapp-work-sdk/1](#)
[rapp-registry/1.1](#) [rapp-cicd/1](#) [rapp-deploy/1](#) the agents and apps that ship with it

RAPP/1 §11.1: the pin is “a permanent compatibility anchor”, and “A successor uses a new `release_scope`”. §13.3: at most one `grail-kernel` entry per scope, and a protocol entry per adopted protocol. `rapp-cicd/1` §2: a release lists every part.

Each layer, top to bottom: in RAPP/1, or what it needs to graduate

6 You	nothing to graduate	
5 Brainstem	5 to graduate	G17 G19 G20 G23 RAR
4 Your device	8 to graduate	G2 G3 G4 G7 G13 G14 G22 G24
3 Hive	6 to graduate	G1 G6 G8 G9 G12 Public copy
2 Organization	5 to graduate	G5 G10 G11 G16 Release rings
1 Estate	2 to graduate	G15 Distributed Hive
0 RAPP/1	in RAPP/1	

2 · Zero drift, clean pull

engineering

- fix RAPP's and RAR's non-conformant eggs and RAR's bounded scan (`kody-w/RAPP#121`, which only the maintainer merges, and `kody-w/RAR#1116`; both open)
- give `rapp-model-hive`'s frames a trusted anchor (`kody-w/rapp-model-hive#2`, open; it needs the owner's registry entries)
- re-sweep until every repo of the RAPP/1 stack is certified (the dogfood)
- keep the default pull clean: default branches and the LTS install carry only in-force parts
- one front door keeps the network unified and tracked; pin the Windows LTS install ([G23](#)), which only the owner merges)

3 · Close the specification gaps

spec owner

- RAPP/1 core additions land before the estate signs: `rev-17`, a draft on `kody-w/rapp-1 experimental/rapp1-core-*`, adds release pins, lifecycle notices and stream signers
- `rapp-hive/1` ([G1](#), [G6](#))
- `rapp-work-sdk/1` ([G2](#), [G3](#), [G4](#), [G7](#), [G11](#))
- `rapp-work/1`, by sibling profiles ([G5](#), [G10](#)); RAPP's Constitution and RAPP Workspace/1 ([G22](#), [G24](#))
- a gap that cannot close in time waits for a later RAPP, with the owner's sign-off

4 · Switch it on

estate owner

- sign both kernel channels: a `grail-kernel` entry for the LTS scope, and one for a successor scope ([G15](#))
- sign the remaining protocol pins; that estate-activates the Workspaces and RAR
- activate `rapp-work/1` ([G16](#)), so the Organization is in force
- authorize the network pulse signer: pulses (experimental) version the map and the network's health
- switch on the Distributed Hive: accept RAPP proposal 0020, then merge the drafts of `beacon 1.1`, `estate.json` and the operator's acceptance in RAPP's seed

5 · Graduate into RAPP/1

engineering, through the rings

- graduate each newest part through the rings: Folder Hive, Hive copy and the Hive agent ([G14](#)), References ([G13](#)), Hub cards ([G12](#)), Public copy, the Brainstem app ([G20](#)), the Brainstem's SDK agent ([G17](#)), the Distributed Hive
- then Hive Mind, once an estate accepts `rapp-federation/1`, and the Release rings, once a graduation uses them
- merge what graduated; the rest stays out of what people pull
- tag the lock once the clean-pull check passes again; sweep for drift on a schedule

2 · Keep the default pull clean: files that mention “experimental” (`git grep -l -i experimental origin/HEAD`; [rapp-hive-public 342](#) [RAR 50](#) [RAPP 46](#) [rapp-workspace 26](#) [rapp-hive-hub 19](#) [rapp-installer 9](#) [rapp-model-hive 9](#) [hive-hub 6](#) [lisspy 1](#) `rapp-1 · rapp-work · rapp-drift-lint · hive-hub-join · hive-hub-mcp · rapp-hive-hub-join 0` Mentions, not problems; some are legitimate. Recount at lock time.

One front door: [proposed](#) the installer's “Start here”, where every header links, leads with the RAPP/1 LTS install (`kody-w/rapp-installer#48`, open; only the owner merges it) · [experimental](#) 13 of the stack's 15 default branches show their earned RAPP/1 badge and a “Start here” link; `rapp-installer` waits on #48, `rapp-workspace` on G24 · [experimental](#) the drift sweep sets each status; the portfolio in `kody-w/rapp-hive-public`, the network's notice board, shows 12 of the stack's 15 certified, and every repo's channel and lifecycle

Gap register: each gap, its phase and who acts

G1	A <code>rapp-hive/1</code> roster can never change	proposed	3 · spec owner	G12	Hive Hub dial records did not describe folder Hives	experimental	5 · engineering
G2	SDK plans cannot move a file	proposed	3 · spec owner	G13	Outside knowledge had no way in	experimental	5 · engineering
G3	SDK discovery misses <code>*_agent.py</code>	proposed	3 · spec owner	G14	The Hive agent's path to the production ring	open	5 · engineering
G4	SDK migration refuses repository-seeded Hives and long world ids	proposed	3 · spec owner	G15	No estate declares the Brainstem's kernel	proposed	4 · estate owner
G5	One owner only, so co-equal groups do not fit	proposed	3 · spec owner	G16	No estate has activated canonical <code>rapp-work/1</code>	open	4 · estate owner
G6	Implementations refuse owner succession	proposed	3 · spec owner	G17	The Brainstem does not call the RAPP Work SDK	proposed	5 · engineering
G7	SDK verification accepts an edited instruction file	proposed	3 · spec owner	G19	The cloud Brainstem loads agents differently	proposed	1 · you
G8	Hive members are names bound to keys, not RAPPIDs	proposed	1 · you	G20	The Brainstem app's path to the production ring	open	5 · engineering
G9	A git commit is not authority in canonical <code>rapp-work/1</code>	proposed	1 · you	G22	“Workspace” names two things	proposed	3 · spec owner
G10	An organization cannot bind a folder Hive	proposed	3 · spec owner	G23	The LTS Windows installer cannot pin the LTS kernel	proposed	2 · engineering
G11	“Organization” means two things	proposed	3 · spec owner	G24	RAPP Workspace/1's frozen identity pins its READMEs	proposed	3 · spec owner

Where it ends: the Distributed Hive [experimental](#) RAPP/1 LTS resolves as a distributed Hive, so a person pulls full RAPP/1 from static data.

The RAPP/1 network as one Hive, found by raw URL: [RAPP's seed](#) → [beacon](#) → [estate.json](#) → [Hive root](#) → [a pointer per repository](#) → [its .rapp/member.md](#), at its LTS commit