


## The RAPP/1 organism, on one page

Read it top (6) to bottom (0). Left: what comes in. Right: what goes out or across.

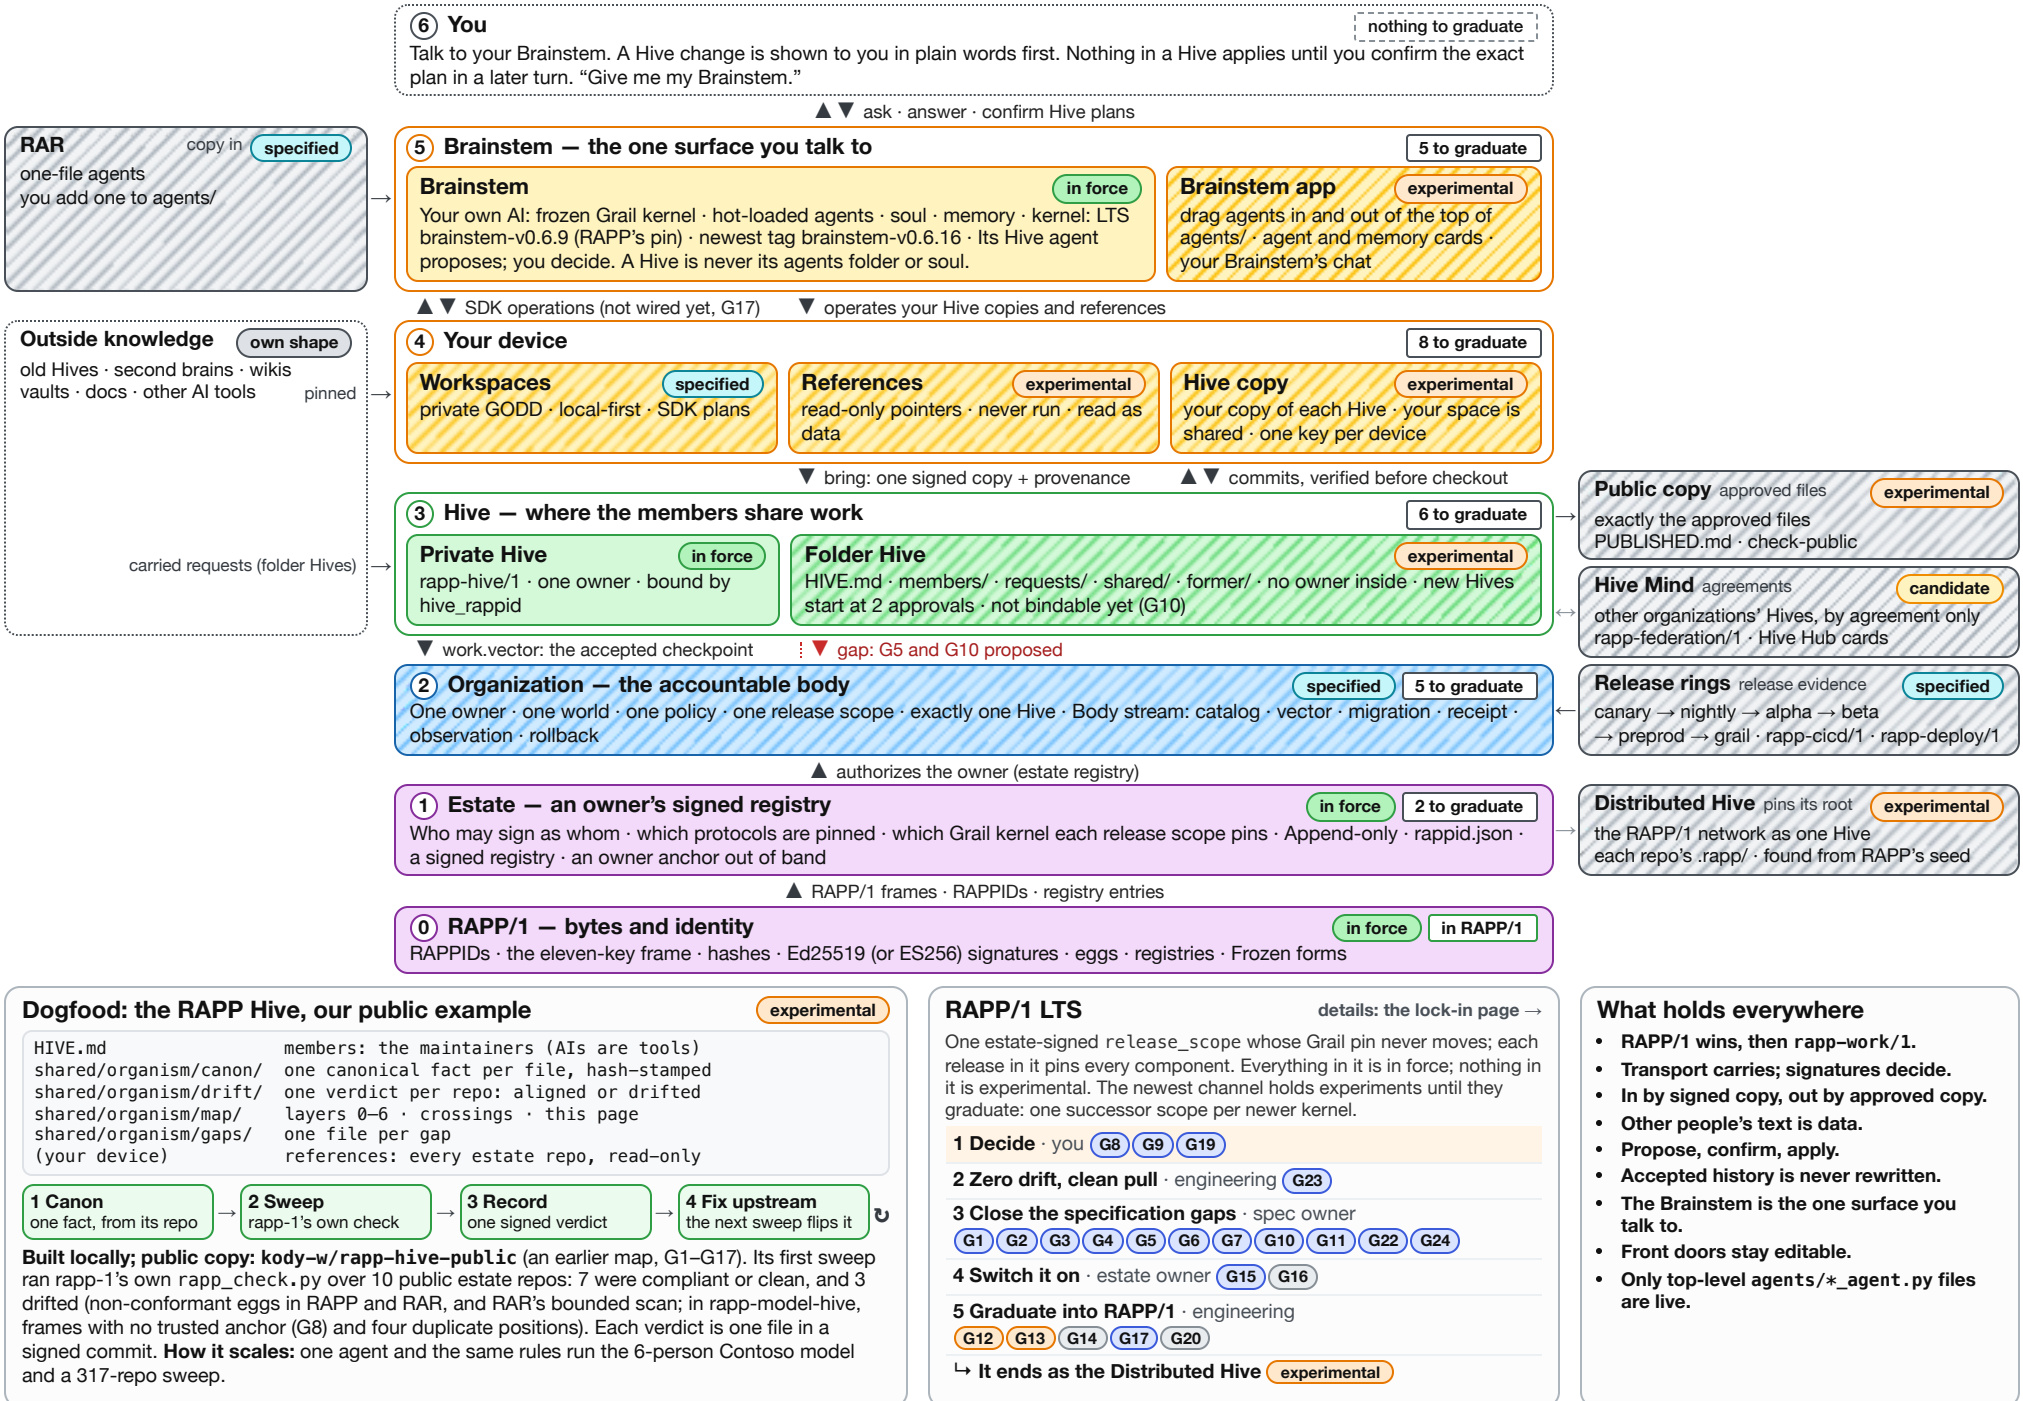

RAPP/1 LTS: what it takes to lock the whole thing

RAPP/1 is the one LTS release people pull. Five phases lock it, in order, with the owner's decisions first; it ends as a distributed Hive.

in force

specified

experimental

candidate

planned

gap

idea

open

proposed

own shape

Your decisions first · phase 1, Decide · you, about an hour

1. accept or refuse RAPP proposal 0002 (G19), Tier 2 loading: a draft on experimental/proposal-0002-tier2-parity

2. ratify the RAPP Work Constitution and its Part V (G8, G9)

3. done: RAPP proposal 0001 and its amendment are merged (kody-w/RAPP#119, kody-w/RAPP#124), so RAPP's Constitution says only top-level agents are live

RAPP/1 LTS is

- One estate-signed release\_scope whose Grail pin never moves; each release in it pins every component.

• Everything in it is in force; nothing in it is experimental.

• The newest channel holds experiments until they graduate: one successor scope per newer kernel.

It pins: (the LTS kernel brainstem-v0.6.9) (rapp-hive/1) (rapp-work/1) (RAPP Workspace/1) (rapp-work-sdk/1) (rapp-registry/1.1) (rapp-cicd/1) (rapp-deploy/1) (the agents and apps that ship with it)

RAPP/1 §11.1: the pin is "a permanent compatibility anchor", and "A successor uses a new release\_scope". §13.3: at most one grail-kernel entry per scope, and a protocol entry per adopted protocol. rapp-cicd/1 §2: a release lists every part.

Each layer, top to bottom: in RAPP/1, or what it needs to graduate

|                |                     |                              |
|----------------|---------------------|------------------------------|
| 6 You          | nothing to graduate |                              |
| 5 Brainstem    | 5 to graduate       | G17 G19 G20 G23 RAR          |
| 4 Your device  | 8 to graduate       | G2 G3 G4 G7 G13 G14 G22 G24  |
| 3 Hive         | 6 to graduate       | G1 G6 G8 G9 G12 Public copy  |
| 2 Organization | 5 to graduate       | G5 G10 G11 G16 Release rings |
| 1 Estate       | 2 to graduate       | G15 Distributed Hive         |
| 0 RAPP/1       | in RAPP/1           |                              |

2 · Zero drift, clean pull  
engineering

- done: RAPP's and RAR's non-conformant eggs and RAR's bounded scan are fixed (kody-w/RAPP#121, kody-w/RAR#1116, both merged)

• give rapp-model-hive's frames a trusted anchor: its duplicate frames are fixed (kody-w/rapp-model-hive#2, merged), and the anchor needs the owner's registry entries

• re-sweep until every repo of the RAPP/1 stack is certified (the dogfood)

• keep the default pull clean: default branches and the LTS install carry only in-force parts

• one front door keeps the network unified and tracked; pin the Windows LTS install (G23); only the owner merges its fix

3 · Close the specification gaps  
spec owner

- RAPP/1 core additions land before the estate signs: rev-17, a draft on kody-w/rapp-1 experimental/rapp1-core-\*, adds release pins, lifecycle notices and stream signers

• rapp-hive/1 (G1, G6)

• rapp-work-sdk/1 (G2, G3, G4, G7, G11)

• rapp-work/1, by sibling profiles (G5, G10); RAPP's Constitution and RAPP Workspace/1 (G22, G24)

• a gap that cannot close in time waits for a later RAPP, with the owner's sign-off

4 · Switch it on  
estate owner

- sign both kernel channels: a grail-kernel entry for the LTS scope, and one for a successor scope (G15)

• sign the remaining protocol pins; that estate-activates the Workspaces and RAR

• activate rapp-work/1 (G16), so the Organization is in force

• authorize the network pulse signer: pulses (experimental) version the map and the network's health

• switch on the Distributed Hive: accept RAPP proposal 0020 (kody-w/RAPP#133), then merge the drafts of beacon 1.1, estate.json and the operator's acceptance in RAPP's seed

5 · Graduate into RAPP/1  
engineering, through the rings

- graduate each newest part through the rings: Folder Hive, Hive copy and the Hive agent (G14), References (G13), Hub cards (G12), Public copy, the Brainstem app (G20), the Brainstem's SDK agent (G17), the Distributed Hive

• then Hive Mind, once an estate accepts rapp-federation/1, and the Release rings, once a graduation uses them

• merge what graduated; the rest stays out of what people pull

• tag the lock once the clean-pull check passes again; sweep for drift on a schedule

2 · Keep the default pull clean: files that mention "experimental" (git grep -l -i experimental origin/HEAD, 2026-09-26): (rapp-hive-public 342) (RAR 50) (RAPP 47) (rapp-workspace 26) (rapp-hive-hub 19) (rapp-model-hive 11) (rapp-installer 9) (hive-hub 6) (lispy 1) (rapp-1 · rapp-work · rapp-drift-lint · hive-hub-join · hive-hub-mcp · rapp-hive-hub-join 0) Mentions, not problems; some are legitimate. Recount at lock time.

One front door: proposed the installer's "Start here", where every header links, leads with the RAPP/1 LTS install (kody-w/rapp-installer#48, open; only the owner merges it) · experimental 13 of the stack's 15 default branches show their RAPP/1 status badge (12 certified, 1 not yet) and a "Start here" link; rapp-installer waits on #48, rapp-workspace on G24 · experimental the drift sweep sets each status; the portfolio in kody-w/rapp-hive-public, the network's notice board, shows 14 of the stack's 15 certified, and every repo's channel and lifecycle

Gap register: each gap, its phase and who acts

|     |                                                                  |          |                |     |                                                     |              |                  |
|-----|------------------------------------------------------------------|----------|----------------|-----|-----------------------------------------------------|--------------|------------------|
| G1  | A rapp-hive/1 roster can never change                            | proposed | 3 · spec owner | G12 | Hive Hub dial records did not describe folder Hives | experimental | 5 · engineering  |
| G2  | SDK plans cannot move a file                                     | proposed | 3 · spec owner | G13 | Outside knowledge had no way in                     | experimental | 5 · engineering  |
| G3  | SDK discovery misses *_agent.py                                  | proposed | 3 · spec owner | G14 | The Hive agent's path to the production ring        | open         | 5 · engineering  |
| G4  | SDK migration refuses repository-seeded Hives and long world ids | proposed | 3 · spec owner | G15 | No estate declares the Brainstem's kernel           | proposed     | 4 · estate owner |
| G5  | One owner only, so co-equal groups do not fit                    | proposed | 3 · spec owner | G16 | No estate has activated canonical rapp-work/1       | open         | 4 · estate owner |
| G6  | Implementations refuse owner succession                          | proposed | 3 · spec owner | G17 | The Brainstem does not call the RAPP Work SDK       | proposed     | 5 · engineering  |
| G7  | SDK verification accepts an edited instruction file              | proposed | 3 · spec owner | G19 | The cloud Brainstem loads agents differently        | proposed     | 1 · you          |
| G8  | Hive members are names bound to keys, not RAPPIDs                | proposed | 1 · you        | G20 | The Brainstem app's path to the production ring     | open         | 5 · engineering  |
| G9  | A git commit is not authority in canonical rapp-work/1           | proposed | 1 · you        | G22 | "Workspace" names two things                        | proposed     | 3 · spec owner   |
| G10 | An organization cannot bind a folder Hive                        | proposed | 3 · spec owner | G23 | The LTS Windows installer cannot pin the LTS kernel | proposed     | 2 · engineering  |
| G11 | "Organization" means two things                                  | proposed | 3 · spec owner | G24 | RAPP Workspace/1's frozen identity pins its READMEs | proposed     | 3 · spec owner   |

Where it ends: the Distributed Hive experimental RAPP/1 LTS resolves as a distributed Hive, so a person pulls full RAPP/1 from static data.

The RAPP/1 network as one Hive, found by raw URL: (RAPP's seed) → (beacon) → (estate.json) → (Hive root) → (a pointer per repository) → (its .rapp/member.md, at its LTS commit)