RESEARCH · 01

Should the Fouled Player Take the Penalty *Himself*?

A ONE-TAILED Z-TEST · TOP 5 EUROPEAN LEAGUES

MAY 2026

renball

TL;DR

Three *sentences*

THE QUESTION

When a goalkeeper fouls a player who then takes the penalty himself, does conversion drop?

THE TEST

One-tailed two-proportion z-test. Treatment n = 79 (75.95%). Control n = 3,456 (78.96%).

THE RESULT

Δ = -3.01 pp (95% CI -13.6 to +5.2) — predicted direction, but p = 0.258, one-tailed: fail to reject H_0.

Why we'd *expect* a drop

The just-fouled player walks straight to the spot.

Theory of the taker: physically jarred — body contact, hit the ground, adrenaline. Emotionally agitated, narrowed focus.

Theory of the keeper: locked in. The foul that gave the penalty was his fault. Nothing left to lose. Maximum motivation.

→ *If both pull conversion down, the bench should hand the ball to a designated specialist.*

DATA

What we built the test on

4,110	3,535	79	5
PENALTIES (LOOSE FILTER)	LINKED PENALTIES	TREATMENT-CELL N	LEAGUES

Seasons in scope: 2017–2018 → 2023–2024

Competitions: Premier League, La Liga, Serie A, Bundesliga, Ligue 1.

Source: FBref player-match data, consolidated locally as FULL_DICT_ROWS.pkl.

Linked = the team took exactly one penalty in the match, so taker, fouled player and conceder are unambiguous.

METHOD

One-tailed two-proportion z-test

TREATMENT

GK fouled the taker

Penalties where the goalkeeper conceded the foul AND the fouled player took the penalty himself.

CONTROL


All other penalties

Every other linked penalty — GK conceded but someone else took it, outfielder conceded (any taker), or no foul recorded (e.g. handball).

H_0: conversion_treatment = conversion_control · H_1: conversion_treatment < conversion_control (one-tailed, α = 0.05) · 95% Wilson CIs · statsmodels.proportions_ztest

CONTEXT


Conversion rate by league

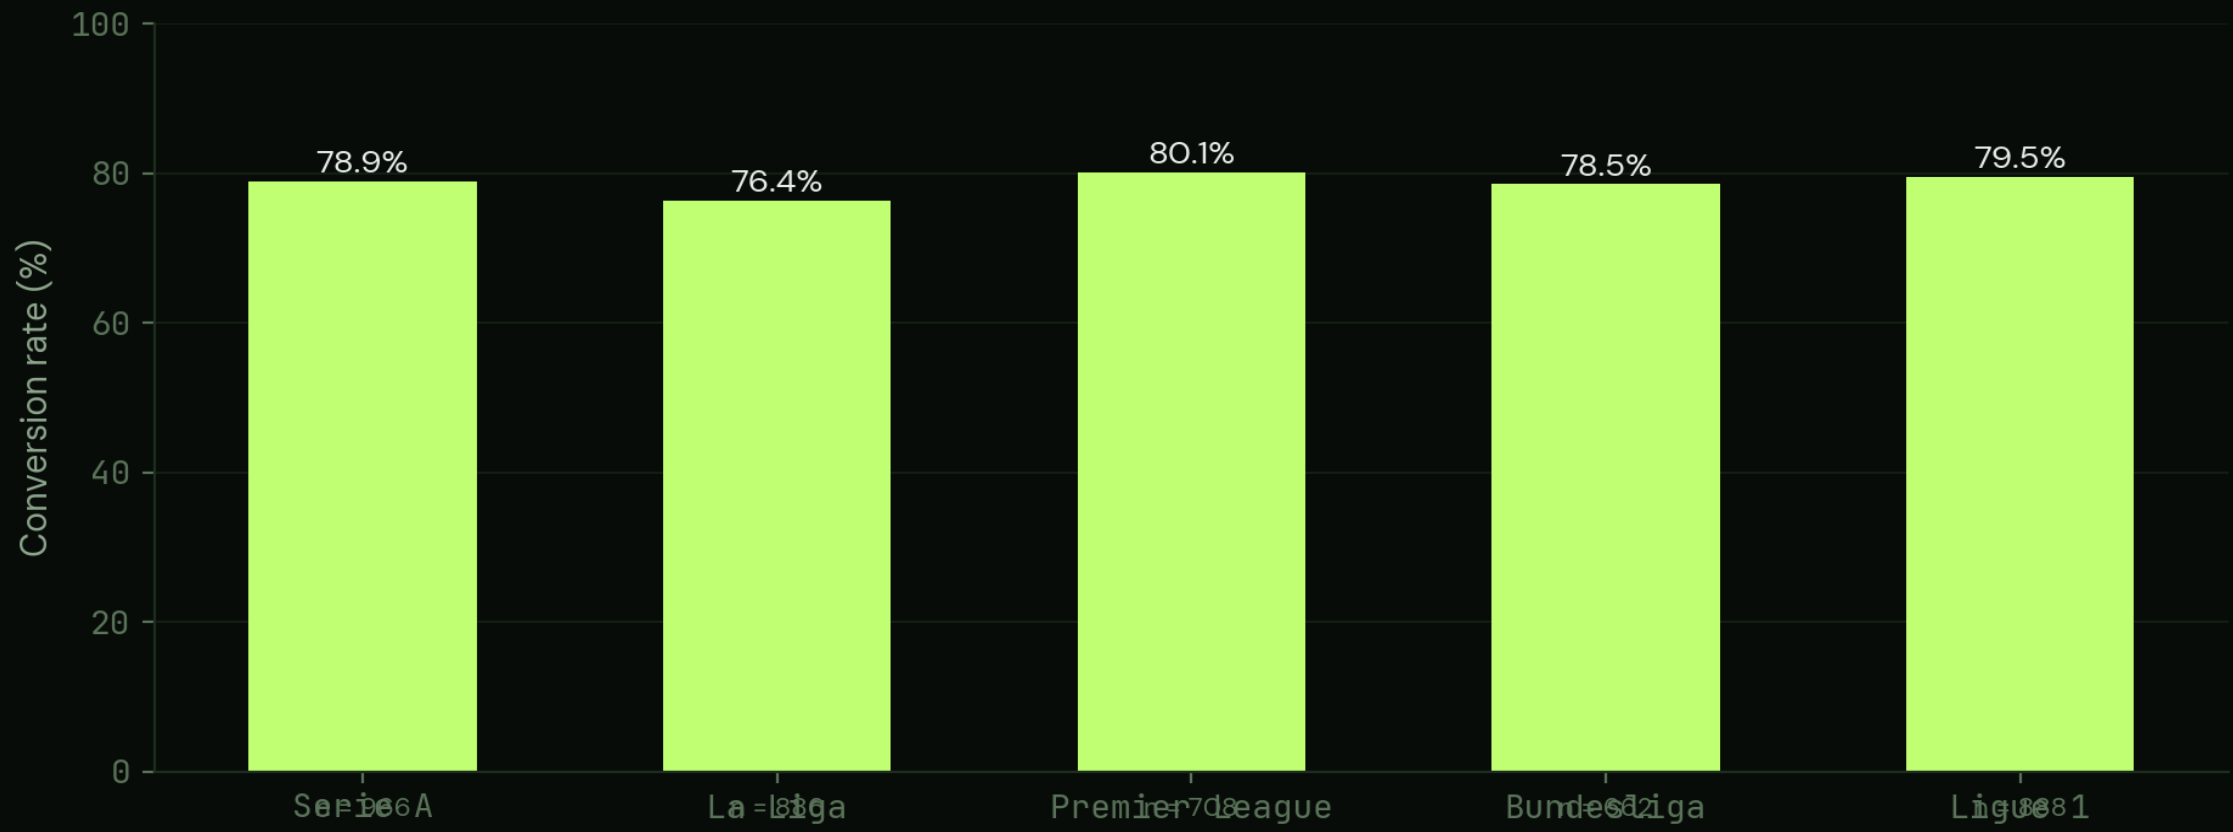

Across the top 5 leagues conversion clusters tightly in the high 70s — league of origin is not a major source of variation.

CONTEXT


Conversion across seasons

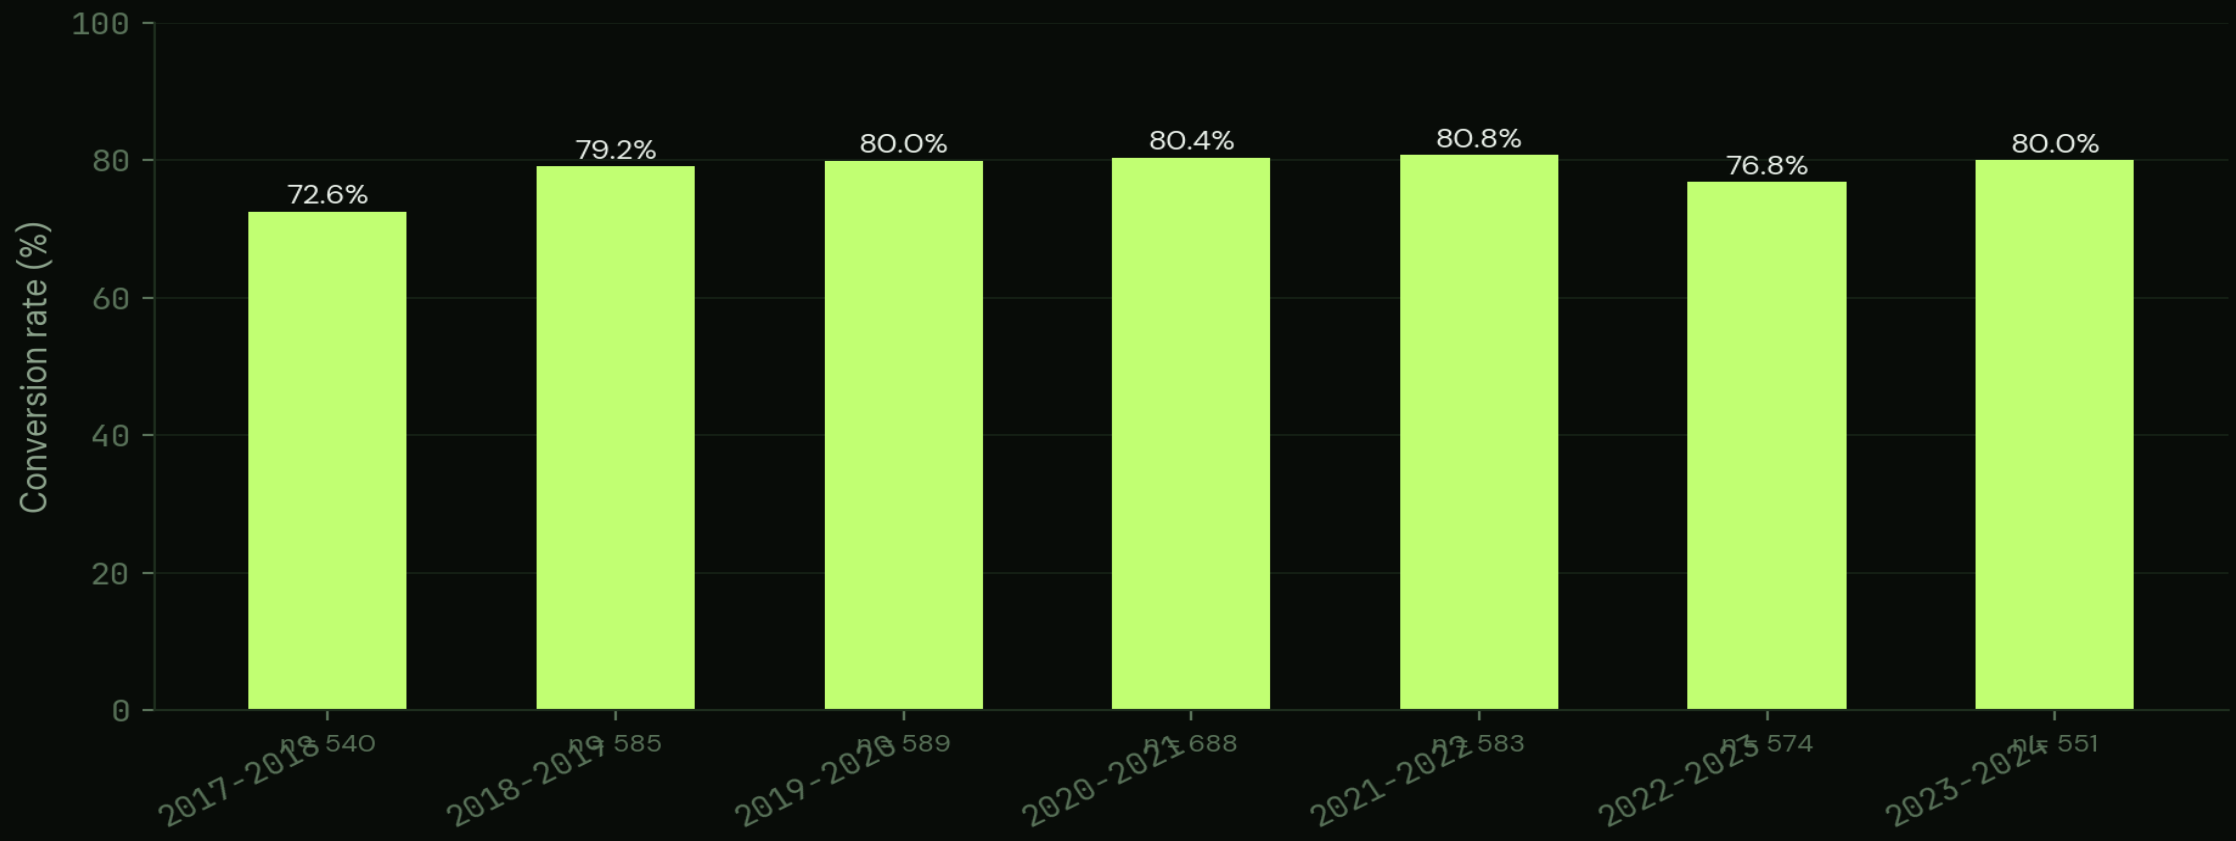

Year-on-year stability is high — the ~77–80% band holds across the period in scope.

PRIMARY TEST · ONE-TAILED

Treatment vs *control*

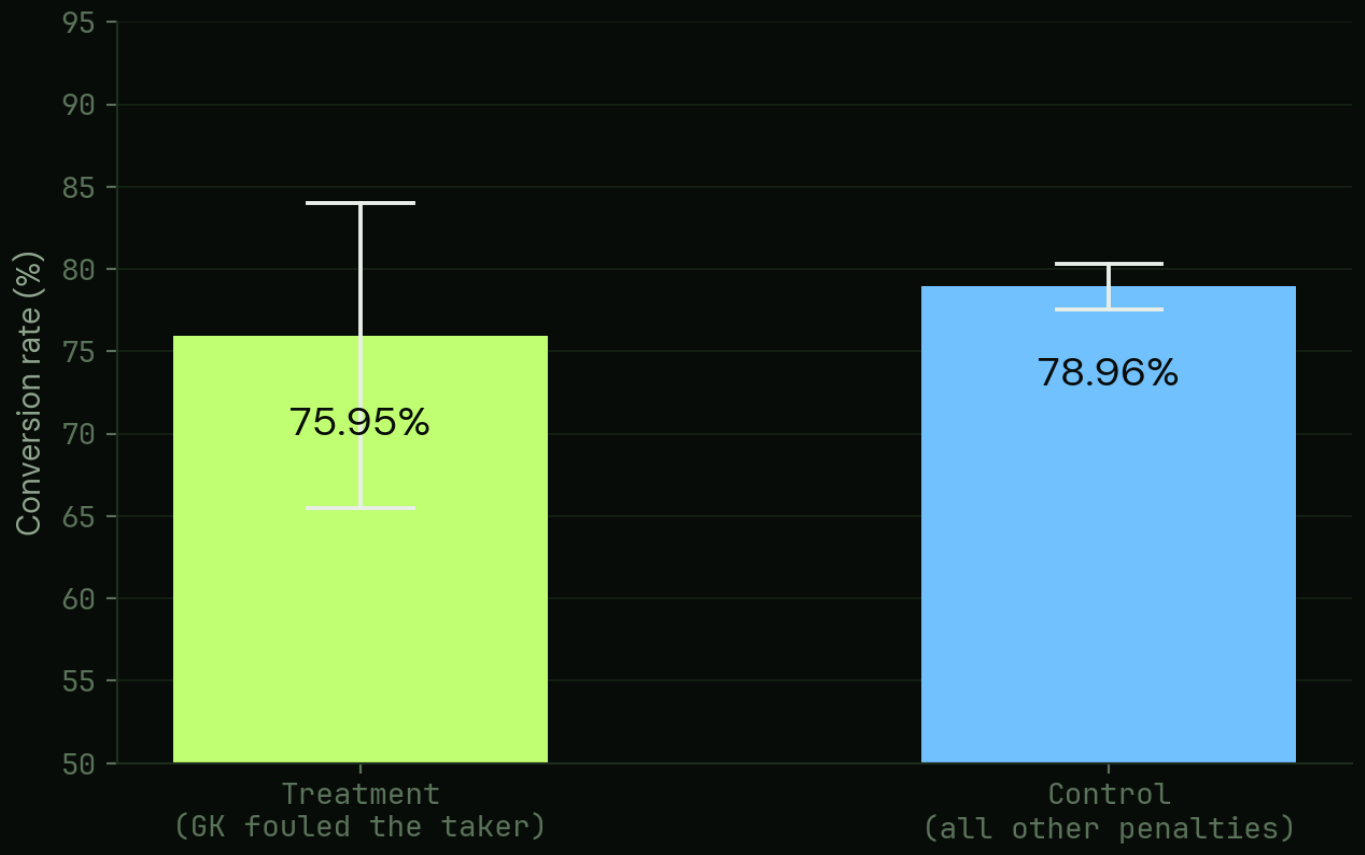

TREATMENT

75.95%

n = 79 · 95% CI [65.46%, 84.03%]

CONTROL

78.96%

n = 3,456 · 95% CI [77.57%, 80.29%]

Δ = -3.01 pp z = -0.649

p = 0.2581 (one-tailed) · Fail to reject H_0

Whiskers: 95% Wilson CIs. Difference 95% CI -13.6 to +5.2 pp; smallest detectable drop ≈ 12.6 pp (80% power).

2×2 CONTEXT

Where the *treatment cell* sits

	GOALKEEPER CAUSED THE FOUL	OUTFIELDER CAUSED THE FOUL
TAKER = THE PLAYER WHO WAS FOULED	TREATMENT 75.95% N = 79	79.02% N = 491
TAKER = NOT THE FOULED PLAYER (INCL. HANDBALLS)	78.33% N = 203	79.00% N = 2,762

Accent-bordered cell = treatment. The other three pool into control.

PER-LEAGUE REPLICATION

The same test, *league by league*

LEAGUE	T. RATE	T. N	C. RATE	C. N	Z	P (1-T)	SIG
Serie A	*80.00%*	*15*	78.57%	812	+0.134	0.5532	No · low n
La Liga	*55.56%*	*18*	77.37%	716	-2.167	0.0151	Yes · low n
Premier League	*91.30%*	*23*	79.63%	599	+1.375	0.9154	No · low n
Bundesliga	*60.00%*	*10*	79.83%	575	-1.539	0.0619	No · low n
Ligue 1	*84.62%*	*13*	79.71%	754	+0.437	0.6689	No · low n

Treatment cells of 10–23 per league: five uncorrected, underpowered tests — the pooled test is the inference.

CONCLUSION

What the data *says*

The bench answer: *can't yet tell.*

Conversion is 3.01 pp lower when the fouled player takes the kick himself (75.95% vs 78.96% for everyone else). The point estimate moves in the predicted direction, but the treatment cell is too small to rule chance out (p = 0.258, one-tailed). With 79 such penalties the design only reliably detects a drop of about 12.6 pp or more.

→ No statistical warrant to override the fouled player who wants to take it himself. Equally, no clean evidence he's at full strength.

Full methodology, source code and data:

Full methodology, source code and data:

renball.com

/PROJECTS/01-PENALTY-ANALYSIS/

→ methodology formal H_0 / H_1, test assumptions, limitations

→ analysis.html interactive dashboard, live numbers from data.json

→ code/build.py Python pipeline — raw pickles → aggregated JSON