


Sm->addService(String16("koffu\_service"), new KfService())数据区 layout  
Binder\_write\_read bwr @ talkWithDriver

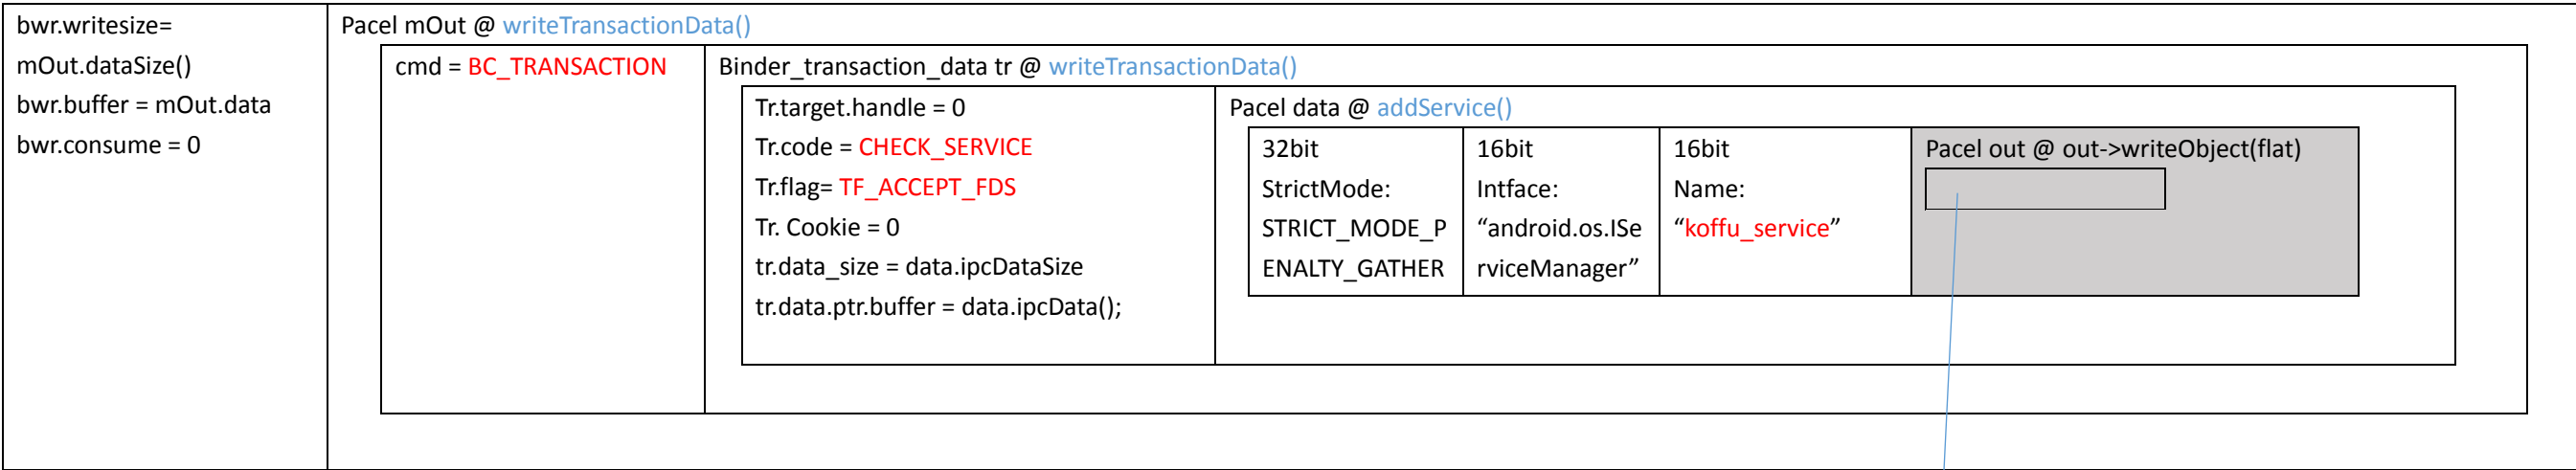

flat\_binder\_object obj @ flatten\_binder

obj.flags = 0x7f | FLAT\_BINDER\_FLAG\_ACCEPTS\_FDS;  
obj.type = BINDER\_TYPE\_BINDER;  
obj.cookie=local=new localbinder()  
obj.binder=local.weakrefs

sm->getService(String16("koffu\_service"))数据区 layout  
Binder\_write\_read bwr @ talkWithDriver

