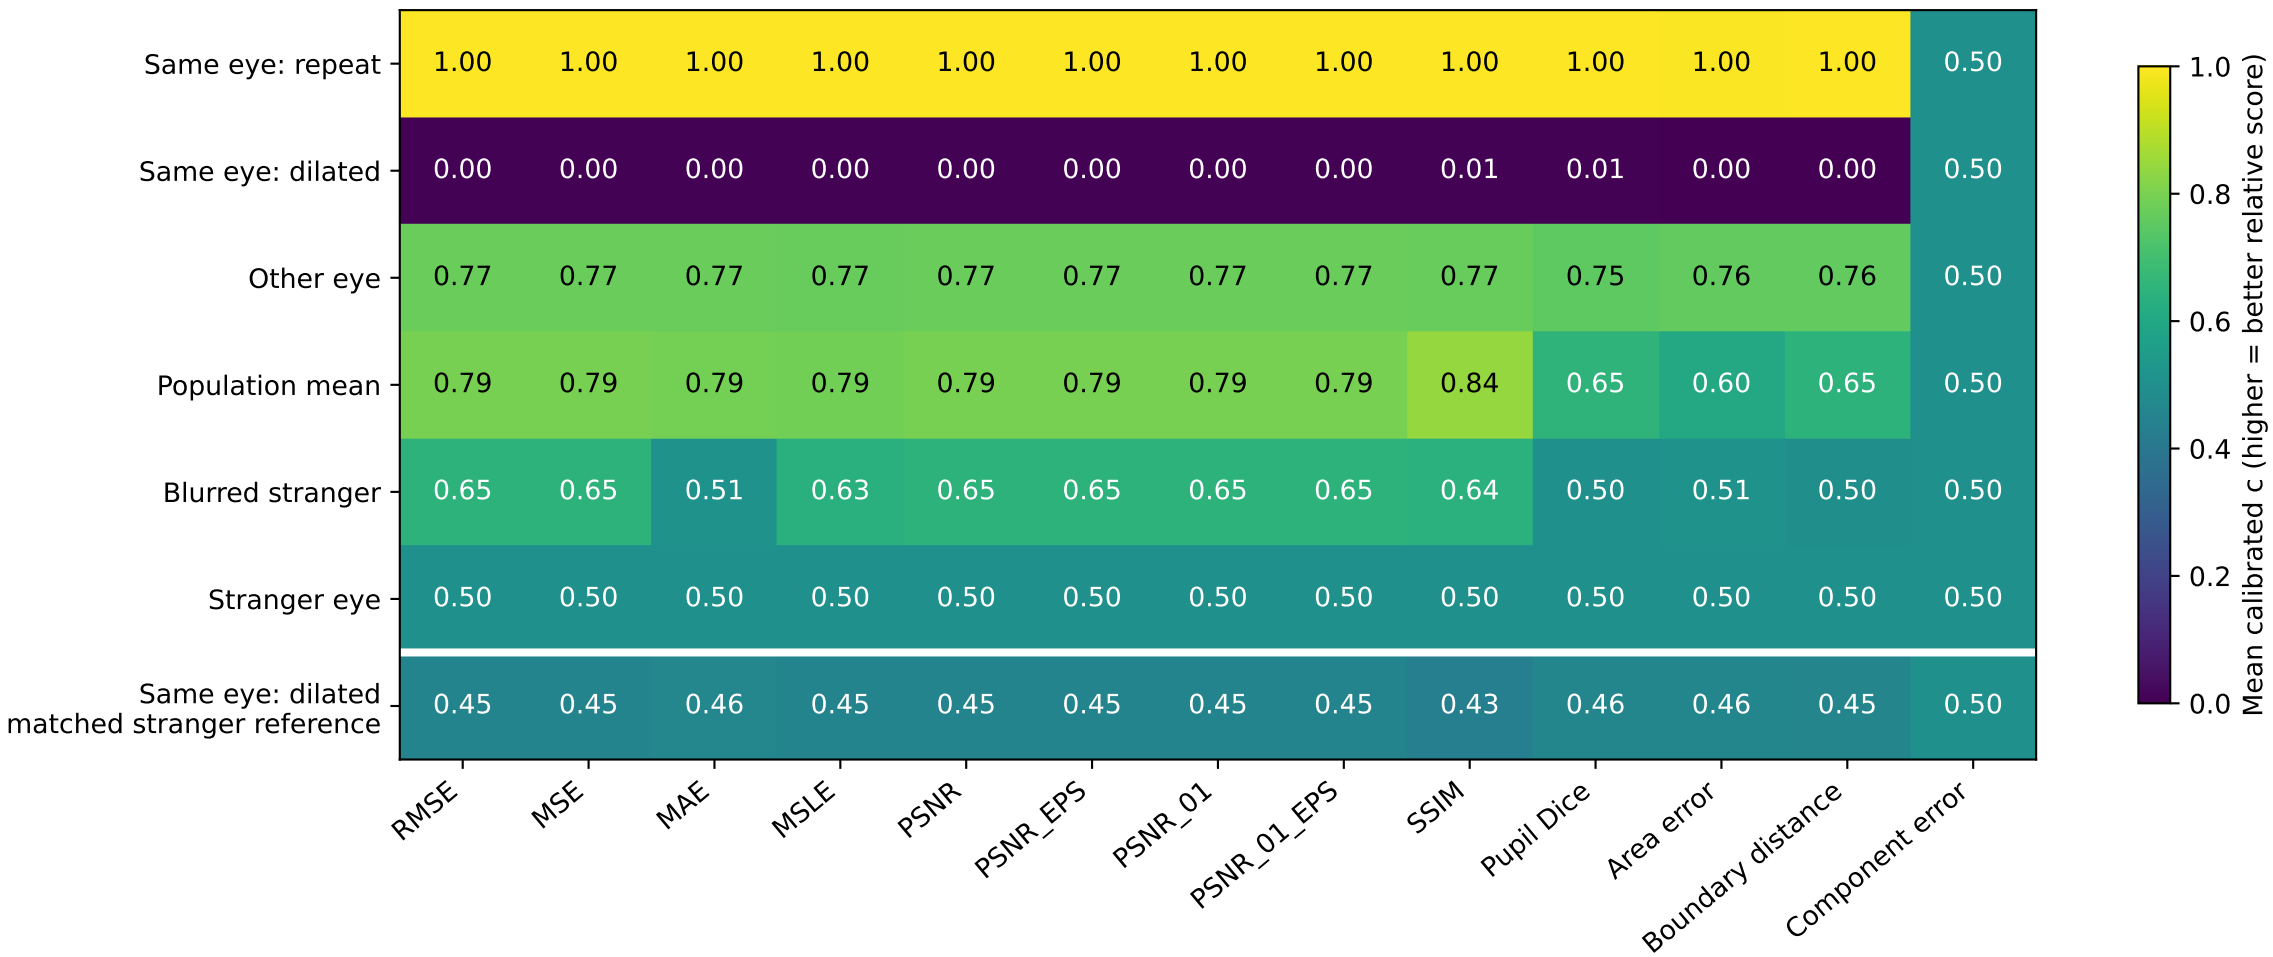

Three independent cohorts x 32 target people; independent template and reference pools. Normal-pupil references in the first six rows.
Last row uses the same donor identities with the same +30% dilation as the candidate. Stranger c=0.5 is a fixed anchor.
Component errors tie at zero, so c=0.5 even for a repeat. This is an illustrative simulation, not biometric validation.