

(19) United States

(12) Patent Application Publication (10) Pub. No.: US 2024/0215413 A1

Hwang et al. (43) **Pub. Date:**

Jun. 27, 2024

(54) EMISSIVE DISPLAY DEVICE INCLUDING A **SCATTERING LAYER**

(71) Applicant: SAMSUNG DISPLAY CO., LTD., YONGIN-SI (KR)

(72) Inventors: **Seong-Yong Hwang**, Yongin-si (KR);

Hyun Duck Cho, Yongin-si (KR); Kook Hyun Choi, Yongin-si (KR); Jun Hee Lee, Yongin-si (KR); Ji Hwang Lee, Yongin-si (KR); Choong Youl Im, Yongin-si (KR); Beohm Rock Choi,

Yongin-si (KR)

(21) Appl. No.: 18/482,734

(22)Filed: Oct. 6, 2023

(30)Foreign Application Priority Data

Dec. 27, 2022 (KR) 10-2022-0186131

Publication Classification


(51) Int. Cl. H10K 59/80 (2006.01)H10K 59/122

(2006.01)U.S. Cl.

CPC H10K 59/8791 (2023.02); H10K 59/122 (2023.02)

ABSTRACT (57)

An emissive display device includes a substrate. A first electrode is disposed on the substrate. A pixel defining layer has a first opening exposing the first electrode. A second electrode is disposed on both the pixel defining layer and the first electrode. An encapsulation layer at least partially covers the second electrode. A light blocking layer is disposed on the encapsulation layer and has a second opening. A color filter is disposed on the light blocking layer. A scattering layer is disposed within the second opening of the light blocking layer and includes a plurality of scattering particles. Particle density of the scattering particles has a value of 1 ea/mm³ or more and 10 ea/mm³ or less, and a diameter of the scattering particles is 0.1 µm or more and 1.5 μm or less.

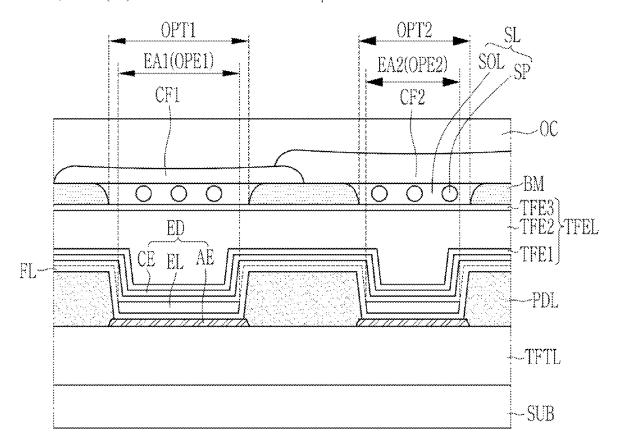

DR3

DU: SUB, TFTL, EML, TFEL

CFL: BM, CF, SL

EML: PDL, ED

CF: CF1, CF2