

Douglas Crockford “Javascript: The Good Parts” O’Reilly




Douglas Crockford's popular book really highlighted the idea that javascript has good parts that exist within some aspects that cause lots of problems (the bad parts?)

Recommended Books:




Elequent JavaScript by Marijn Haverbeke

Many other books came out that tried to provide style and usage guidelines to help tame javascript

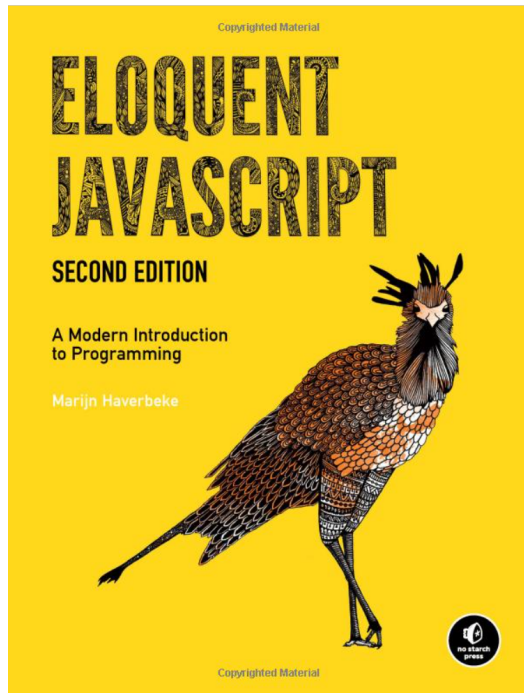

Recommended Books:

Kyle Simpson's "You Don't Know JS" series has been very popular and goes deeply into specific topic areas of javascript

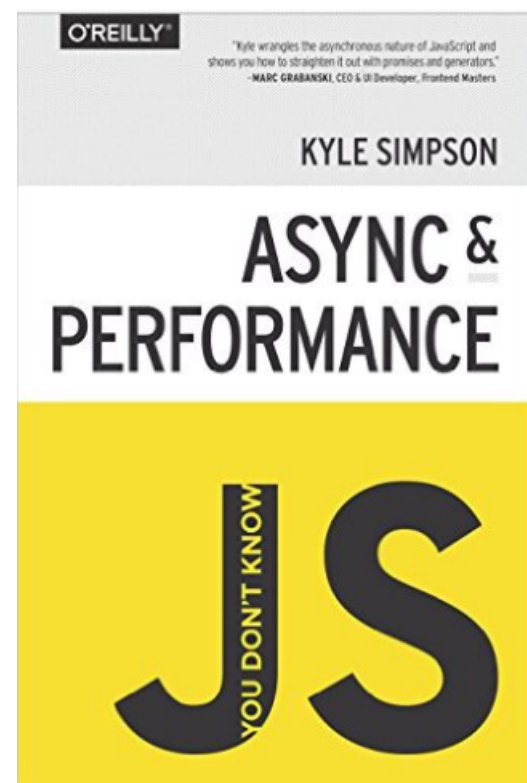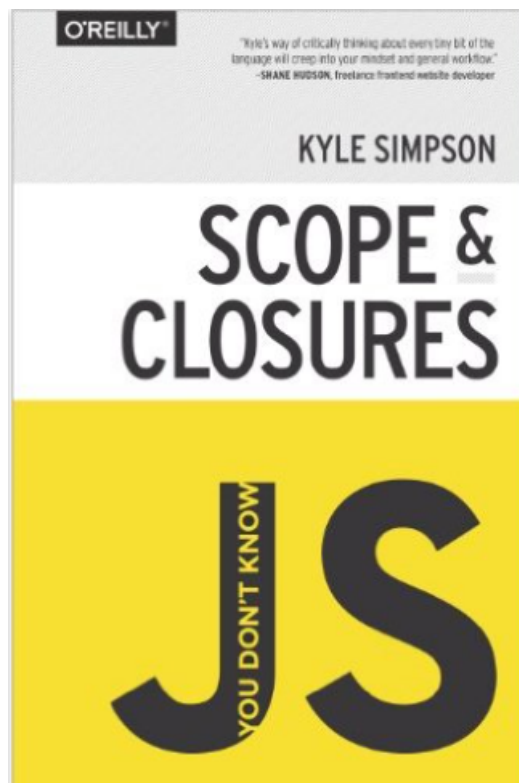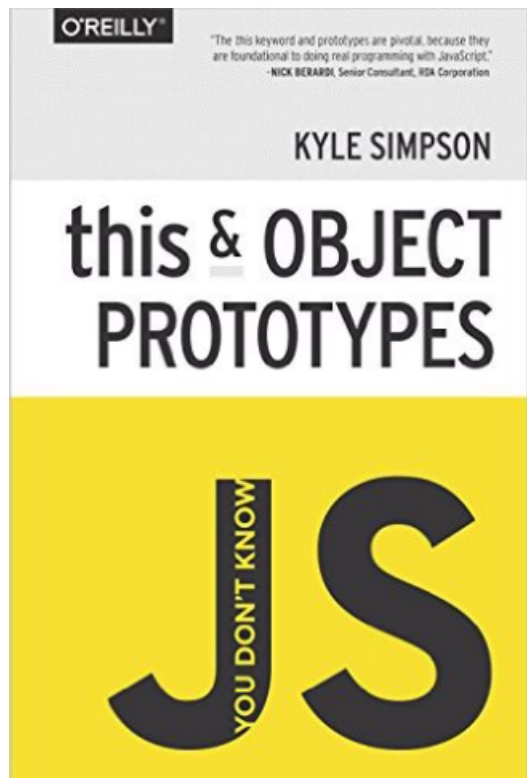

...

Recommended Starting Place:

w3schools.com/

w3schools.com



HTML/CSS

Learn HTML

Learn CSS

Learn W3.CSS

Learn Bootstrap

JavaScript

Learn JavaScript

Learn jQuery

Learn jQueryMobile

Learn AppML

Learn AngularJS

Learn AJAX

Learn JSON

HTML

The language for building web pages.

LEARN HTML


HTML REFERENCE

JavaScript

- Originally developed by Netscape, as LiveScript
- Became a joint venture of Netscape and Sun in 1995, renamed JavaScript
- Now standardized by the European Computer Manufacturers Association as ECMA-262 (also ISO 16262)

JavaScript code often referred to as collection of *scripts*, not programs. Made sense in the context of being snippets imbedded within HTML documents

These days, however people want to write programs in javascript

- 
- **JavaScript and Java are only related through similar syntax**
 - **JavaScript is dynamically typed**
 - **JavaScript's support for objects is very different from Java, C++, C# etc.**



Popular client-side uses related to Web Applications:

- **User interactions through forms are easy**
- **The Document Object Model makes it possible to support dynamic HTML documents with JavaScript**
- **Using javascript to manipulate CSS style sheets**



Recently on server-side:

- **Popularized by Node.js and related technologies**
- **Recently javascript ES6 has become "fully" supported.**
- **It attempts to clean up some of the issues described here the we experienced with ES5.**

Javascript Pitfalls:

Here we will summarize some of the pitfalls that drove students, and myself, crazy in previous course offerings.

These slides are a summary of things we experienced writing and debugging javascript code.



Danger Will Robinson

Throughout this presentation and other course notes you will see some "Danger Will Robinson" slides.



These all show something that tripped up students in past offerings of the course. (They actually happened to someone in the class).

Please contribute your own "Danger Will Robinson" slide if you come across something you want to warn others about. (Or let us know if some are no longer valid.)

Also if you have good code examples that illustrate a danger pass them along so we can post them

Javascript Primitive Types

Javascript has **primitive** and **object** data types.

What they are depends on which book you read or which website you visit.

Here are some common versions of what you find.

Primitives: boolean number string symbol (ES6) undefined null	boolean number string symbol (ES6) undefined	boolean number string symbol (ES6) undefined
Objects: object function	object function	object

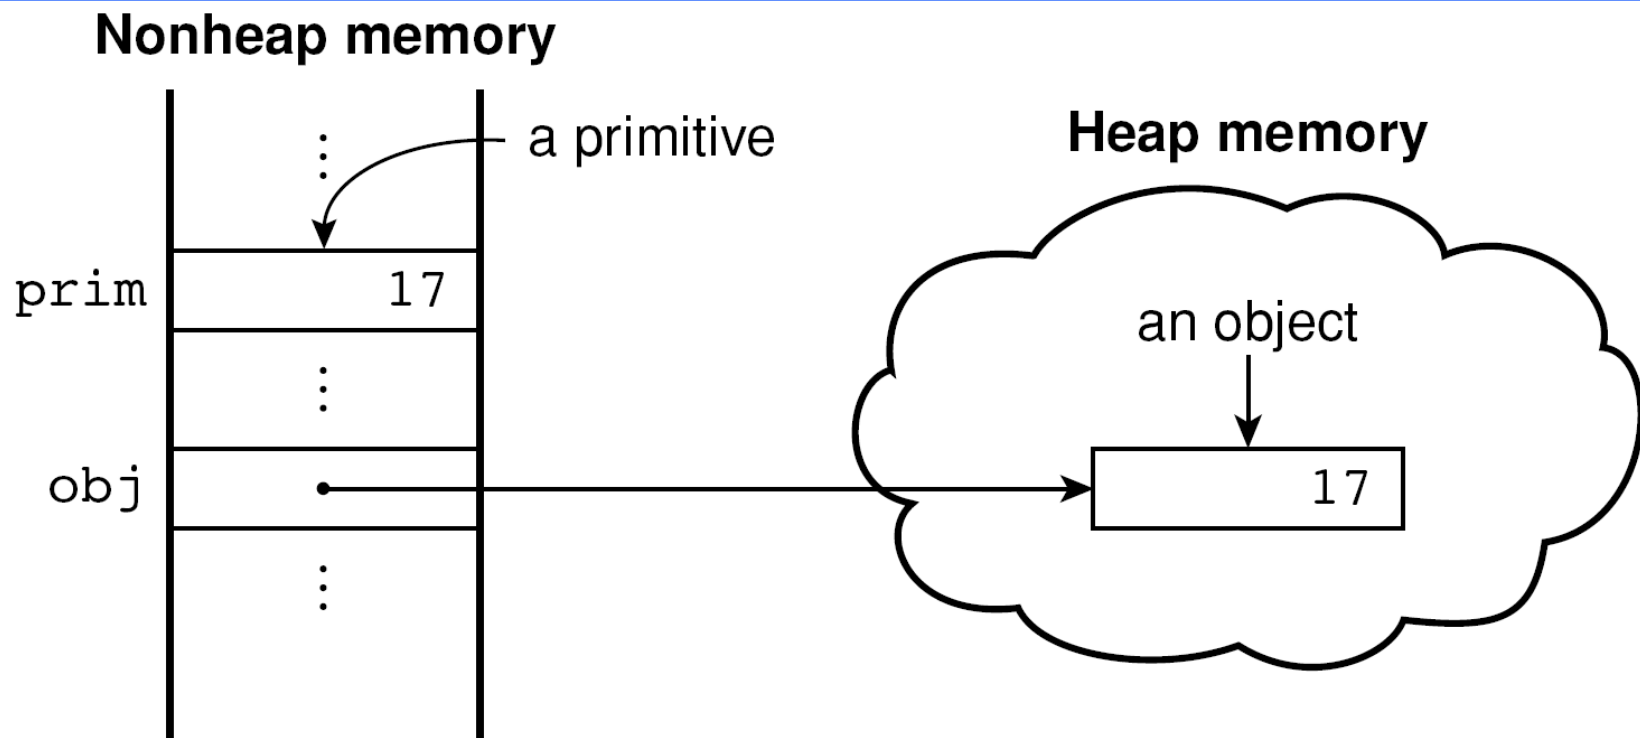


Figure 4.1 Primitives and objects

PRIMITIVES vs. OBJECTS in PROGRAMMING LANGUAGES:

```
prim1 == prim2; //can check for equality
```

```
prim = prim1; //makes a copy
```

```
obj1 == obj2; //check for identity, not equality
```

```
obj = obj1; //refer to same object.
```

Danger Will Robinson



- Javascript uses IEEE 754 standard for binary floating point arithmetic
- Unfortunately languages based on IEEE 754 cannot handle decimal fractions exactly (binary rep. cannot represent $1/10$, just like decimal fraction cannot handle $1/3$ exactly)
- for example $0.1 + 0.2$ does not yield 0.3

```
c:\2406Node>node  
> 0.1 + 0.2  
0.30000000000000004  
>
```
- Most frequently reported bug in javascript code
- Suggestion: if dealing with money, convert to dollars and whole cents, do the arithmetic with whole numbers and then convert final result to fraction

Number in Javascript

Javascript is the first modern language I've encountered that does NOT have an int (integer) data type.

In javascript all numbers are real (instances are floating point numbers).

Java: 3/5 == 0	C++ 3/5 == 0	javascript 3/5 == 0.6
-------------------	-----------------	--------------------------

A sacred rule in programming is: Never compare real numbers for equality:

For real values x and y:

if(x == y) {...} **//NEVER do this**

if(x < y) {...} **//OK**

if(x <= y) {...} **//OK**

if(x > y) {...} **//OK**

if(x >= y) {...} **//OK**

...Number in Javascript

"Amusing" example from Android's JUnit testing Java library:

AnyOf
Assert
Assume
AssumptionViolatedException
BaseDescription



static void	<u>assertEquals</u> (double expected, double actual) Deprecated. <i>Use assertEquals(double expected, double actual, double delta) instead</i>
static void	<u>assertEquals</u> (double expected, double actual, double delta) Asserts that two doubles are equal to within a positive delta.

Deprecated sounds very polite!

Concatenation Operator



- The **+** operator both concatenates as strings or adds numbers
- Unless both operators are numbers they will both be turned into strings and concatenated as strings
- This behaviour is source of many bugs
- If you want **+** to mean add you must make sure that both operands are numbers.

```
> 42 + 5
47
> 42 + '5'
'425'
```


Danger Will Robinson

- `parseInt('16') → 16`
- `parseInt('16 acres') → 16`

parseInt() reads till it finds a non digit or end



- `parseInt('08') → 0`

(because leading 0 indicates base 8 not base 10, and 8 is not a digit in base 8. Many bugs related to parsing dates)

Suggestion: always use the version of `parseInt` that allows you to specify the radix

`parseInt('08', 10) → 8`

NOW:

`parseInt('08') → 8`

\$ Character

The \$ in javascript is just another letter that can be used for variable names or function names.



People confuse it for some special operator.

```
> var $ = 42;  
> $; //42  
> var $name$$$ = 'Sue';  
> $name$$$; //'Sue'  
> var $ = function(n){console.log(n)};  
> $(2); //2  
> function $(n){console.log(n)};  
> $(2); //2
```

Jquery uses a global variable \$ to represent it's library
\$.post("positionData",jsonStr,function(data, status){});

Reserved Words

Reserved words cannot be used directly as variable or function names but can be used as objects property names



```
var method; // ok
var class; // illegal
function for(){return 42;}; // illegal
object = {box: value}; // ok
object = {var: value}; //ok
object = {'var': value}; // ok
object.box = value; // ok
object.var = value; //ok
object['var'] = value; // ok
```

Semicolon Insertion

```
function f(){  
    return  
    3;  
}  
f(); //undefined  
  
function f(){  
    return 3;  
}  
f(); //3
```



- Javascript tries to correct “what it thinks” might be faulty programs by inserting “what it thinks” are missing semicolons.
- Sometimes places semicolons at the end of a line if “it thinks” that will complete an expression

```
return  
5+6;  
will become  
return;  
5+6;
```


Suggest: keep expressions on one line especially return statements.

or end a line with something that cannot be a valid statement if you added a semicolon.

Irony that we battle extra ; instead of missing ;.

Semicolon Insertion

```
c:\>node
> function f1(n){return 42 + n;}
undefined
> f1(2);
44
> function f2(n){
... return
... 42 + n;
... }
undefined
> f2(2);
undefined
> function f3(n){
... return 42 +
... n;
... }
undefined
> f3(2);
44
>
```



- Javascript tries to correct “what it thinks” might be faulty programs by inserting “what it thinks” are missing semicolons.
- Sometimes places semicolons at the end of a line if “it thinks” that will complete an expression

`return`

`5+6;`

will become

`return;`

`5+6;`

Suggest: keep expressions on one line especially `return` statements.

or end a line with something that cannot be a valid statement if you added a semicolon.

Ironic that we battle extra ; instead of missing ;.

Semicolon Insertion

```
> function badfunc(n){  
... return 42 + n;  
... 42 + n;  
... }  
undefined  
> badfunc(2);  
44
```

- But wait, it gets worse
- Javascript does not seem to care if you write code that is unreachable

```
return  
5+6;
```

will become

```
return;  
5+6;
```

but

```
function(n) {  
    return 5+6;  
    5 + 4;  
}
```

Does not generate an error even though
5 + 4; is an unreachable statement.

This legitimizes semi colon insertion
that would not make sense.



Falsey Values

Javascript has many values that evaluate to false in a boolean test

0	Number
NaN	Number
' '	String
false	Boolean
null	Object
undefined	Undefined



They cannot be used interchangeably. The following will not work to find out if an object is missing a member because value would be undefined not null

```
value = myObject[name];  
if(value == null)  
    alert(name + 'not found');
```



<http://dorey.github.io/JavaScript-Equality-Table/>

true	<input checked="" type="checkbox"/>	if (true) { /* executes */ }
false	<input type="checkbox"/>	if (false) { /* does not execute */ }
1	<input checked="" type="checkbox"/>	if (1) { /* executes */ }
0	<input type="checkbox"/>	if (0) { /* does not execute */ }
-1	<input checked="" type="checkbox"/>	if (-1) { /* executes */ }
"true"	<input checked="" type="checkbox"/>	if ("true") { /* executes */ }
"false"	<input checked="" type="checkbox"/>	if ("false") { /* executes */ }
"1"	<input checked="" type="checkbox"/>	if ("1") { /* executes */ }
"0"	<input checked="" type="checkbox"/>	if ("0") { /* executes */ }
"-1"	<input checked="" type="checkbox"/>	if ("-1") { /* executes */ }
" "	<input type="checkbox"/>	if (" ") { /* does not execute */ }
null	<input type="checkbox"/>	if (null) { /* does not execute */ }
undefined	<input type="checkbox"/>	if (undefined) { /* does not execute */ }
Infinity	<input checked="" type="checkbox"/>	if (Infinity) { /* executes */ }
-Infinity	<input checked="" type="checkbox"/>	if (-Infinity) { /* executes */ }
[]	<input checked="" type="checkbox"/>	if ([]) { /* executes */ }
{}	<input checked="" type="checkbox"/>	if ({}) { /* executes */ }
[[]]	<input checked="" type="checkbox"/>	if ([[]]) { /* executes */ }
[0]	<input checked="" type="checkbox"/>	if ([0]) { /* executes */ }
[1]	<input checked="" type="checkbox"/>	if ([1]) { /* executes */ }
NaN	<input type="checkbox"/>	if (NaN) { /* does not execute */ }

Danger Will Robinson



- In Javascript **undefined** and **NaN** are not constants
- They are global variables and you can change their values
- Don't !!!
- (May be fixed now?)

Seems fixed

Leaving off the var



```
function f(n){  
    v1=n; v1++; return v1;  
};  
f(2);    //3  
v1;      //3  
  
function g(n){  
    var v2=n; v2++; return v2;  
};  
  
g(2);    //3  
v2;      //ReferenceError: v2 is not defined
```

- Variables declared implicitly (without `var` keyword), even locally in functions, have GLOBAL scope (become global variables).
- This creates bugs that are hard to track down. Pollutes global scope.
- Originally done as a “feature” for novice programmers –it causes all kinds of problems in Javascript
- Suggest: Never declare variables without `var`, `let`, or `const`

Danger Will Robinson



```
CMD>node
> function f(){
... console.log('x='+x);
... if(1<2) {
... .. var x=42;
... .. console.log('x='+x);
... .. }
... }
undefined
> f()
x=undefined
x=42
undefined
>
```

- var declaration is "hoisted" to top of function scope (not block scope).
- Initialization of variable is not hoisted.
- Can be source of many bugs

Variable Hoisting:

```
function f(){
  console.log(x);
  //stuff;
  {
    var x = 42;
  }
  //more stuff;
};
```

becomes:

```
function f(){
  var x; //undefined
  console.log(x);
  //stuff;
  {
    x = 42;
  }
  //more stuff;
};
```

Danger Will Robinson



```
CMD>node
> function f(){
... console.log('x='+x);
... if(1<2){
..... let x=42;
..... console.log('x='+x);
..... }
... }
undefined
> f()
ReferenceError: x is not defined
    at f (repl:2:18)
    at repl:1:1
    at signHandlersWrap (vm.js:2
    at signHandlersWrap (vm.js:7
    at ContextifyScript.Script.run
    at REPLServer.defaultEval (rep
    at bound (domain.js:280:14)
    at REPLServer.runBound [as eva
    at REPLServer.<anonymous> (rep
    at emitOne (events.js:101:20)
>
```

- Javascript 6 has **let** and **const** ~~instead of~~ in addition to **var**.
- Variables declared with **let** are "not hoisted" and have block, not function scope.
- (technically they are hoisted but referring to the uninitialized value is illegal)

Variable Hoisting:

```
function f(){
    //stuff;
    {
        let x = 42;
    }
    //more stuff;
};
```

becomes:

```
function f(){
    var x; //undefined
    //stuff;
    {
        let x = 42;
    }
    //more stuff;
};
```

Danger Will Robinson

- Javascript has two sets of equality operators `===`, `!==` and their evil twins: `==` and `!=`
- The good ones work as you would expect: If two operands are of the same type and have the same value then `===` gives true and `!==` gives false
- The "evil" ones do the right things if the operands are of the same type, but if not they will try to coerce the values into the same type. The rules by which this is done are complex and hard to remember. Here are some interesting cases



```
' ' == '0'      //false
0 == ' '       //true
0 == '0'       //true
false == 'false' //false
false == '0'    //true
false == undefined //false
false == null   //false
null == undefined //true
```

All of these produce false with the `===` operator

Danger Will Robinson

- Javascript has two sets of equality operators `===`, `!==` and their evil twins: `==` and `!=`
- The good ones work as you would expect: If two operands are of the same type and have the same value then `===` gives true and `!==` gives false
- The "evil" ones do the right things if the operands are of the same type, but if not they will try to coerce the values into the same type. The rules by which this is done are complex and hard to remember. Here are some interesting cases



<code>42 == '42' //true</code>	<code>42 === '42' //false</code>
<code>'42' == 42 //true</code>	<code>'42' === 42 //false</code>
<code>'42' == 40 + 2 //true</code>	<code>'42' === 40 + 2 //false</code>
<code>42 == '40+2' //false</code>	<code>42 === '40+2' //false</code>
<code>42 == '4'+2' //true</code>	<code>42 === '4'+2' //false</code>



<http://dorey.github.io/JavaScript-Equality-Table/>

a == b

	true	false	1	0	-1	"true"	"false"	"1"	"0"	"-1"	""	null	undefined	Infinity	-Infinity	[]	{}	[[]]	[0]	[1]	NaN
true	■		■					■												■	
false		■		■					■		■						■		■	■	
1	■		■					■												■	
0		■		■					■		■						■		■	■	
-1					■					■											
"true"						■															
"false"							■														
"1"	■		■					■												■	
"0"		■		■					■										■		
"-1"					■					■											
""		■		■							■						■		■		
null												■	■								
undefined												■	■								
Infinity														■							
-Infinity															■						
[]		■		■							■										
{}																					
[[]]		■		■							■										
[0]		■		■					■												
[1]	■		■					■													
NaN																					



<http://dorey.github.io/JavaScript-Equality-Table/>

a === b

	true	false	1	0	-1	"true"	"false"	"1"	"0"	"-1"	""	null	undefined	Infinity	-Infinity	[]	{}	[[]]	[0]	[1]	NaN
true																					
false																					
1																					
0																					
-1																					
"true"																					
"false"																					
"1"																					
"0"																					
"-1"																					
""																					
null																					
undefined																					
Infinity																					
-Infinity																					
[]																					
{}																					
[[]]																					
[0]																					
[1]																					
NaN																					

Danger Will Robinson

- `typeof NaN === 'number' //true`
- `NaN === NaN //false`
`NaN !== NaN //true`
- `isNaN(x)` can distinguish between numbers and NaN but includes Infinity as a number
- `isFinite(x)` will determine if x is a number but not infinity. Unfortunately `isFinite()` will also coerce x into a number if it is not one.



Best to define your own `isNumber()` function like this

```
function isNumber(x) {  
    return typeof x === 'number' && isFinite(x)  
}
```

Danger Will Robinson


- `typeof null` is 'object'
- So you cannot test for null with
`if(typeof x == 'null')`
- Worse: you cannot test if something is an object with
`if(typeof x == 'object')` because it might be null
e.g. `typeof null; //object`
- To test if something is object or array use the following
(because `my_value` would be false if it were null)



```
if (my_value && typeof my_value === 'object') {  
    // my_value is an object or an array!  
}
```

Danger Will Robinson

- Switch statements will fall through to the next case unless an explicit **break** disrupts the flow. This is intended as a feature but leads, in fact, to hard-to-find bugs



```
switch (bordersize) {  
    case "0": document.write("<table>");  
                break;  
    case "1": document.write("<table border = '1'>");  
                break;  
    case "4": document.write("<table border = '4'>");  
                break;  
    case "8": document.write("<table border = '8'>");  
                break;  
    default:  document.write("Error - invalid choice: ",  
                             bordersize, "<br />");  
}
```

Without the **break** cases would fall through to the next case and execute that code as well

Danger Will Robinson

- **typeof operator does not distinguish between arrays and objects**
- **How to tell if a reference is an array or object?**



One way:

```
if(x && typeof x === 'object' &&  
    x.constructor === Array){  
    //here if x is an array  
}
```

Note this test will not work on function arguments “array” because it is not a real array.

ES6: function arguments are now real arrays –I think.

Danger Will Robinson

new operator and this

What happens below if the `new` is forgotten when trying to create a plane?



```
function plane(newMake, newModel, newYear){  
    this.make = newMake;  
    this.model = newModel;  
    this.year = newYear;  
}
```

```
myPlane = new plane("Cessna", "Centurian", "1970");
```

Answer: the `this` variable in the constructor binds with the global `Object`, from which everyone inherits, and the constructor then proceeds to clobber this object with new property values --this is very bad!

Danger Will Robinson

```
var arr = [ 13, 42, 86, 99 ];  
for(k in arr) console.log(arr[k]);  
//13 42 86 99
```

```
for(var i = 0; i<arr.length; i++) console.log(arr[i]);  
//13 42 86 99
```

```
arr.name = 'Lou';  
for(var i = 0; i<arr.length; i++) console.log(arr[k]);  
//13 42 86 99
```

```
for(k in arr) console.log(arr[k]);  
//13 42 86 99 Lou
```

- Do not use a for-in loop to loop over the characters of a string or the elements of an array. If properties are added to the string or array the loop will loop over those as well.

ES6: Use FOR-OF loops instead



Danger Will Robinson

```
var str = 'Louis';  
for(var i=0; i<str.length; i++) console.log(str[i]);  
//L o u i s  
  
for(k in str) console.log(str[k]);  
//L o u i s  
  
str.__proto__.name = 'Bob';  
for(var i=0; i<str.length; i++) console.log(str[i]);  
//L o u i s  
  
for(k in str) console.log(str[k]);  
//L o u i s Bob
```

- Do not use a for-in loop to loop over the characters of a string or the elements of an array. If properties are added to the string or array the loop will loop over those as well.

- Although javascript claims strings are primitives, they have a prototype which can have properties added to them (so they are actually objects!)

