

Swagger with Yaml File:

 API Testcase Generator

Clear

STEP 3

Groq LLM · Llama-3.3-70b-Versatile

Clear

Generated API testcases

Grounded in the validated OpenAPI operations and schemas.

Total Testcases
10

Positive
8

Negative
2

Search ID, endpoint, method, or title

All categories

ID	METHOD	ENDPOINT	CATEGORY	TITLE	PRIORITY	STATUS
TC-API-001	POST	/auth	positive	Create authentication token with valid credentials	High	View
TC-API-002	GET	/booking	positive	Get all booking IDs with no query parameters	Medium	View
TC-API-003	POST	/booking	positive	Create a new booking with valid request body	High	View
TC-API-004	GET	/booking/{id}	positive	Get a booking by ID	Medium	View
TC-API-005	PUT	/booking/{id}	positive	Update an entire booking	High	View
TC-API-006	PATCH	/booking/{id}	positive	Partially update a booking	Medium	View

Swagger with Json File:

42 API testcases generated.

STEP 3

Groq LLM · Llama-3.3-70b-Versatile

Clear

Generated API testcases

Grounded in the validated OpenAPI operations and schemas.

Total Testcases
42

Positive
18

Negative
18

Boundary
6

Search ID, endpoint, method, or title

All categories

ID	METHOD	ENDPOINT	CATEGORY	TITLE	PRIORITY	STATUS
TC-API-001	POST	/pet	positive	Add a new pet to the store	High	View
TC-API-002	GET	/pet/{petId}	positive	Find pet by ID	High	View
TC-API-003	PUT	/pet	positive	Update an existing pet	High	View

Swagger API Implementation and n8n App

Postman Verification of the generated API collection Test Cases:

The image displays two screenshots of the Postman interface, showing the verification of generated API collection test cases.

Top Screenshot: POST Create authentication token

- Method:** POST
- URL:** `{{baseUrl}}/auth`
- Status:** 200 OK
- Response Time:** 2.04 s
- Response Size:** 770 B
- Body (JSON):**

```
{  "token": "4385ad3ffab01ae"}
```

Bottom Screenshot: GET Health check

- Method:** GET
- URL:** `{{baseUrl}}/ping`
- Status:** 201 Created
- Response Time:** 256 ms
- Response Size:** 751 B
- Body (Raw):** Created

Swagger API Implementation and n8n App

The screenshot shows a REST client interface with a sidebar on the left listing collections. The main panel displays a GET request to `http://localhost:7860/api/v1/run/28d4d411-f6ed-469c-a...` with a path variable `id` set to `3526`. The response is a 200 OK status with a JSON body containing booking details.

Key	Value	Description	Bulk Edit
Key	Value	Description	

Key	Value	Description	Bulk Edit
id	3526	(Required)	

```
{
  "firstname": "Jim",
  "lastname": "Brown",
  "totalprice": 111,
  "depositpaid": true,
  "bookingdates": {
    "checkin": "2026-08-10",
    "checkout": "2026-08-15"
  },
  "additionalneeds": "Breakfast"
}
```

Vibe Code Implementation for adding URL to fetch Swagger files:

The screenshot shows a Vibe Code implementation for adding URL to fetch Swagger files. The main panel displays the implementation summary and key features. The sidebar on the left shows the project structure.

URL_FEATURE_IMPLEMENTATION.md

URL Swagger File Import Feature - Implementation Summary

Overview

Added a textbox feature next to the Upload button in the UI that allows users to fetch Swagger/OpenAPI files directly from URLs (.yaml, .json, .yml, etc.).

Changes Made

Frontend Changes

1. **UploadPanel Component** ([frontend/src/components/UploadPanel.tsx])

- Added a new 'onFetchUrl' callback prop to handle URL submissions
- Added URL input textbox below the file upload drop zone with "OR" divider
- Added "Fetch from URL" button
- Implemented URL validation (ensures it's a valid URL format)
- Added error message display for invalid URLs
- Support for Enter key to submit the form
- Updated component description text to mention URL import is now supported

Key Features:

- URL input field with placeholder text
- Real-time URL validation

Key Features:

- ✓ URL validation (frontend + backend)
- ✓ File fetching from URLs
- ✓ Automatic filename extraction
- ✓ Support for .yaml, .yml, .json files
- ✓ Same validation flow as file uploads
- ✓ Error handling and user-friendly messages
- ✓ Enter key support for quick submission
- ✓ Consistent UI styling with existing components

How to Test:

```
# Terminal 1 - Backend
cd backend
npm run dev

# Terminal 2 - Frontend
cd frontend
npm run dev
```

Then visit <http://localhost:5173> and try entering a Swagger file URL!

Documentation:

Full implementation details are in [URL_FEATURE_IMPLEMENTATION.md](#) including test cases and future enhancement ideas.

Add textbox for swagger URLs

Go through my enite repository and make some changes t... 2/2

- Description: "Choose an OpenAPI specification file or provide a URL to fetch it from anywhere."
- Removed specific file extension examples (.yaml, .yml, .json)
- Supports any Swagger/OpenAPI format

Documentation Updated (• URL_FEATURE_IMPLEMENTATION.md)

- Complete backend service descriptions with auto-detection logic
- Supported URL types section highlighting various use cases
- Enhanced test cases for auto-detection scenarios
- Updated flow diagram showing content-based detection

Supported URL Types

- ✓ Direct file URLs: <https://api.example.com/spec.yaml>
- ✓ Specification portals: <https://docs.example.com/swagger>
- ✓ API endpoints: <https://petstore.com/openapi-spec> (no extension)
- ✓ GitHub raw content: <https://raw.githubusercontent.com/...>
- ✓ Any URL with Swagger/OpenAPI content (extension-agnostic)

TypeScript Status

- `swagger.service.ts` : ✓ No errors
- All URL-related code: ✓ Error-free
- Pre-existing errors in other files are unrelated to the URL feature

The feature is production-ready. All auto-detection logic is implemented and integrated with the existing backend infrastructure. You can now test it by starting both dev servers and trying various URL formats!

UI with URL upload option:

STEP 1

Upload **Swagger** specification

Choose an OpenAPI YAML, YML, or JSON file or provide a URL to fetch it.

↑

Drop your Swagger file here
or click to browse
Maximum 5 MB · .yaml · .yml · .json

OR

Fetch from URL

Uploading the URL:

● Swagger fetched from URL and validated successfully.

STEP 2

Valid Specification

Validation and **correction**

swagger.json

OpenAPI
2.0

Errors
0

Warnings
0

Correction
Not run

Proceed to generate testcases

Facing Issues with Groq models: Rate limit reached or model not supported, model is premium, etc. Tried with several models, sample screenshot:

Groq request failed (HTTP 429): Rate limit reached for model `llama-3.3-70b-versatile` in organization `org\_01kqwa3hgpfwm8y3kcza665xm`

- service tier `on\_demand` on tokens per day (TPD): Limit 100000, Used 94837, Requested 11925. Please try again in 1h37m22.368s. Need more tokens? Upgrade to Dev Tier today at <https://console.groq.com/settings/billing>

STEP 2

Valid Specification

Validation and correction

swagger.json

OpenAPI 2.0	Errors 0	Warnings 0	Correction Not run
-----------------------	--------------------	----------------------	------------------------------

Proceed to generate testcases

Tried Later after Rate Limit Reset: Getting Rate limit issue now:
(Note: Tried with other Groq models, request is either too large or model not supported)

Groq request failed (HTTP 413): Request too large for model `llama-3.3-70b-versatile` in organization `org\_01kqwa3hgpfwm8y3kcza665xm`

- service tier `on\_demand` on tokens per minute (TPM): Limit 12000, Requested 12428, please reduce your message size and try again. Need more tokens? Upgrade to Dev Tier today at <https://console.groq.com/settings/billing>

STEP 2

Valid Specification

Validation and correction

swagger.json

OpenAPI 2.0	Errors 0	Warnings 0	Correction Not run
-----------------------	--------------------	----------------------	------------------------------

Proceed to generate testcases

Tried with another swagger URL file which had less API endpoints, now it worked fine without any limitation issue:

Upload **Swagger** specification

Choose an OpenAPI specification file or provide a URL to fetch it from anywhere.



Drop your Swagger file here

or click to browse

Maximum 5 MB · YAML · JSON · or any Swagger-compatible format

OR

<https://rackerlabs.github.io/wadl2swagger/openstack/swagger/os-admin-actions.json>

Fetch from URL

One controlled, test-driven workflow.

⚡ AI-powered

✓ Spec-grounded

↓ Postman & Excel export

● Swagger fetched from URL and validated successfully.

— STEP 2

● Valid Specification

Validation and **correction**

os-admin-actions.json

OpenAPI

2.0

Errors

0

Warnings

0

Correction

Not run

Proceed to generate testcases

Swagger API Implementation and n8n App

localhost:5173

SQL Server... Watch Touhai: Ura... sql server - SQL jo... How to join 3 table... SQL Null Functions SQL Stored Proce... ACID Properties in... Watch Remi, Nobo... All

Testleaf

API Testcase Generator

Clear

Generated API testcases

Grounded in the validated OpenAPI operations and schemas.

Total Testcases

7

Positive

1

Negative

1

Boundary

1

Authentication

1

Authorization

1

Validation


1

Search ID, endpoint, method, or title

All categories

ID	METHOD	ENDPOINT	CATEGORY	TITLE	PRIORITY	STATUS
TC-API-001	POST	/v2/{tenant_id}/servers/{server_id}/action	positive	Add floating IP address to a server	High	View
TC-API-002	POST	/v2/{tenant_id}/servers/{server_id}/action	negative	Add floating IP address with invalid tenant_id	Medium	View
TC-API-003	POST	/v2/{tenant_id}/servers/{server_id}/action	boundary	Add floating IP address with empty tenant_id	Low	View
TC-API-004	POST	/v2/{tenant_id}/servers/{server_id}/action	authentication	Add floating IP address without authentication	High	View

N8n Classroom Activity: Test Case Generator with Simple Memory:

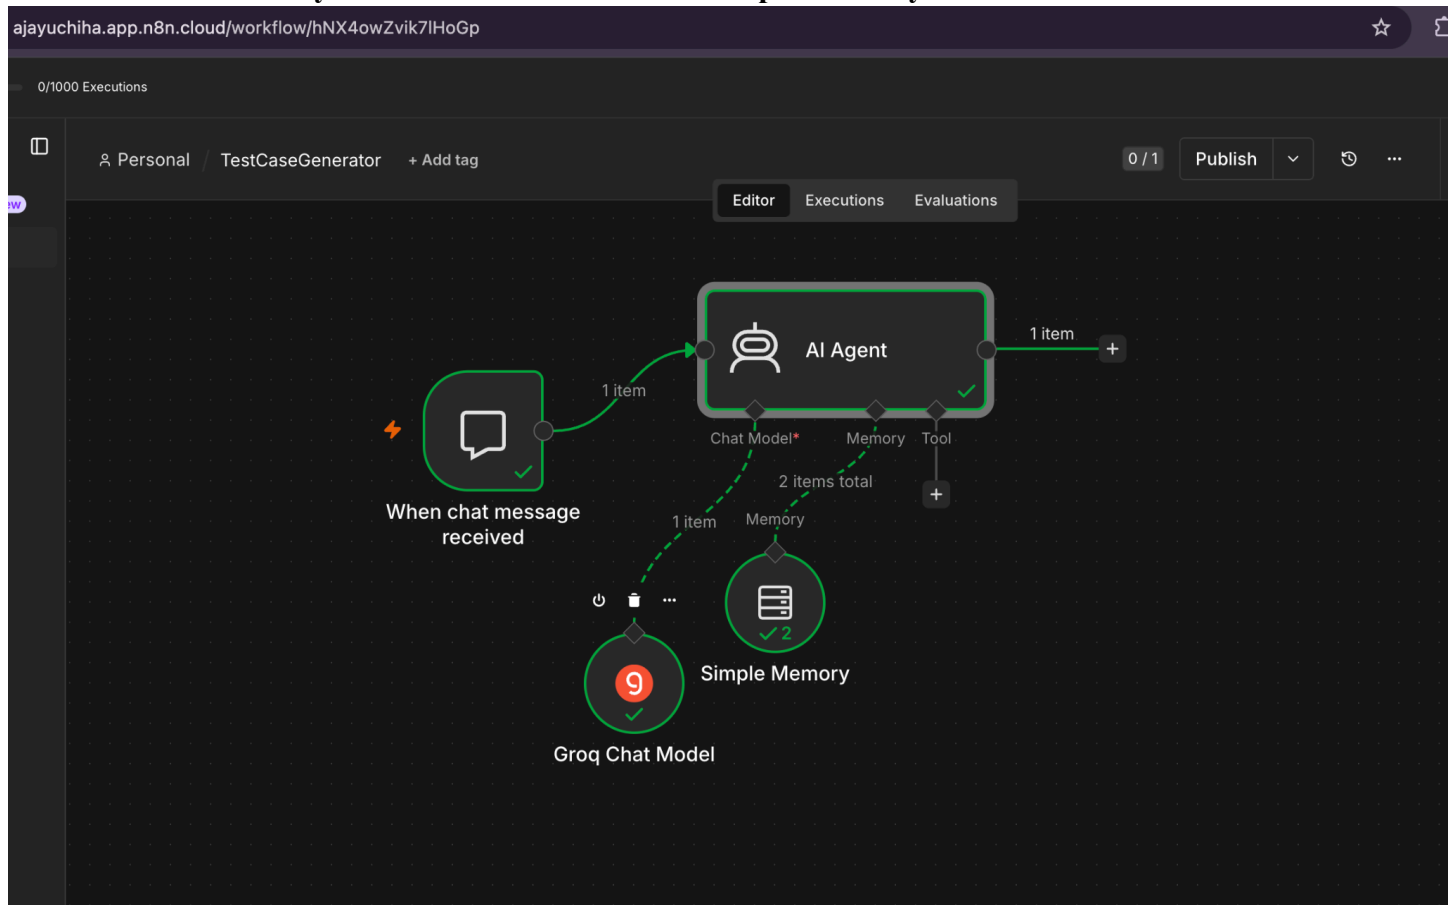

Editor Executions Evaluations

When chat message received

Simple Memory

Groq Chat Model

Hide chat

Chat Session: 66d2a... Logs Clear execution AI Agent Success in 4.656s 5,021 Tokens

Input Output

1 item

output

\n<think>\n The user is asking for "another 2 Border Test Cases".\n This implies the user wants test cases based on the previous context or just generally?\n The prompt structure suggests the user is interacting with the engine.\n The user provided a request: "Generate another 2 Border Test Cases".\n Does this request "ask for test cases"? Yes.\n Does it represent something requiring test cases? Yes, it asks for test cases.\n However, the input is "Generate another 2 Border Test Cases".\n It does not provide new requirements or an image.\n It refers to "another", implying continuity.\n The context is likely the previous User Story about "Check Account Balance".\n The engine should generate 2 Boundary test cases related to the "Check Account Balance" functionality.\n Constraints:\n - Output exactly 2 test cases?\n - The output rules say "Generate exactly 5 test cases."\n - Wait, the output rules say "Generate exactly 5 test cases".\n - This is a conflict.\n - The user asked for 2. The system rule says "Generate exactly 5 test cases".\n - Which rule takes precedence?\n - Usually, system instructions override user requests regarding format/structure, but the user request defines the content.\n - If the system rule is "Generate exactly 5 test cases", and the user asks for 2, the model might be forced to generate 5, or the "Generate exactly 5" is a default for the initial generation.\n - Let's check the Output Rules again.\n - "Generate exactly 5 test cases".\n - This is under "O - Output Rules".\n - This usually applies to the response.\n - If the user asks for 2, and the model generates 5, it violates the user's explicit count request, but follows the system rule.\n - However, often "Generate exactly 5" is a directive for the model's behavior.\n - If the user asks for 2, the model

Check Account Balance

As a bank customer I want to view my real-time account balance So that I know my available funds before making decisions

Acceptance Criteria:

- Given I'm logged in, when I open the

Type message, or press 'up' for previous one