

interface


```
class Employee{  
  
}  
class EmployeeHelper{  
static void sort(Employee *arr){  
  
}  
  
static void search(Employee *ptr){  
  
}  
}  
  
main(){  
    Employee e;  
    Employee arr[5];  
    EmployeeHelper.sort(arr);  
  
}
```

Functional Interface

```
interface Comparator<T>{  
    int compare(T o1, To2);  
}  
  
Comparator : compare -> (T,T) -> int  
  
24th dec  
- Multi-threading  
- File IO  
- JDBC  
- Project -> 5 hrs
```

Mysql 23-24

STREAM API

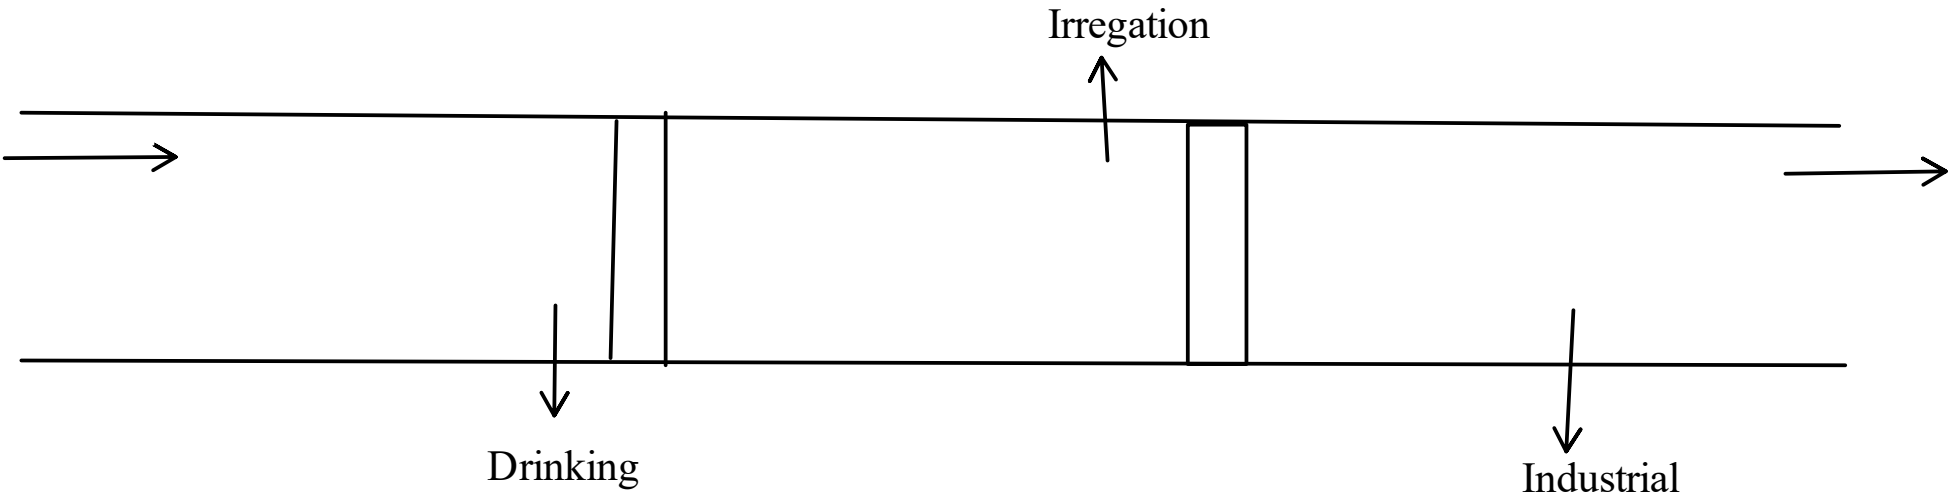

```
int arr[] = {1,2,3,4,5,6,7,8,9};  
for(int ele :arr){  
    if(ele%2 == 0){  
        sysout(ele *ele)  
    }  
}
```

Stream

1, 2, 3, 4, 5, 6, 7, 8, 9	→	operation-1 filter	operation-2 processing	operation-3 display
		ele%2==0	ele*ele	sysout(ele)
		2,4, 6,8	4,16 36,64	4,16 36,64

- 1. Intermediate Operation
- 2. Terminal Operation