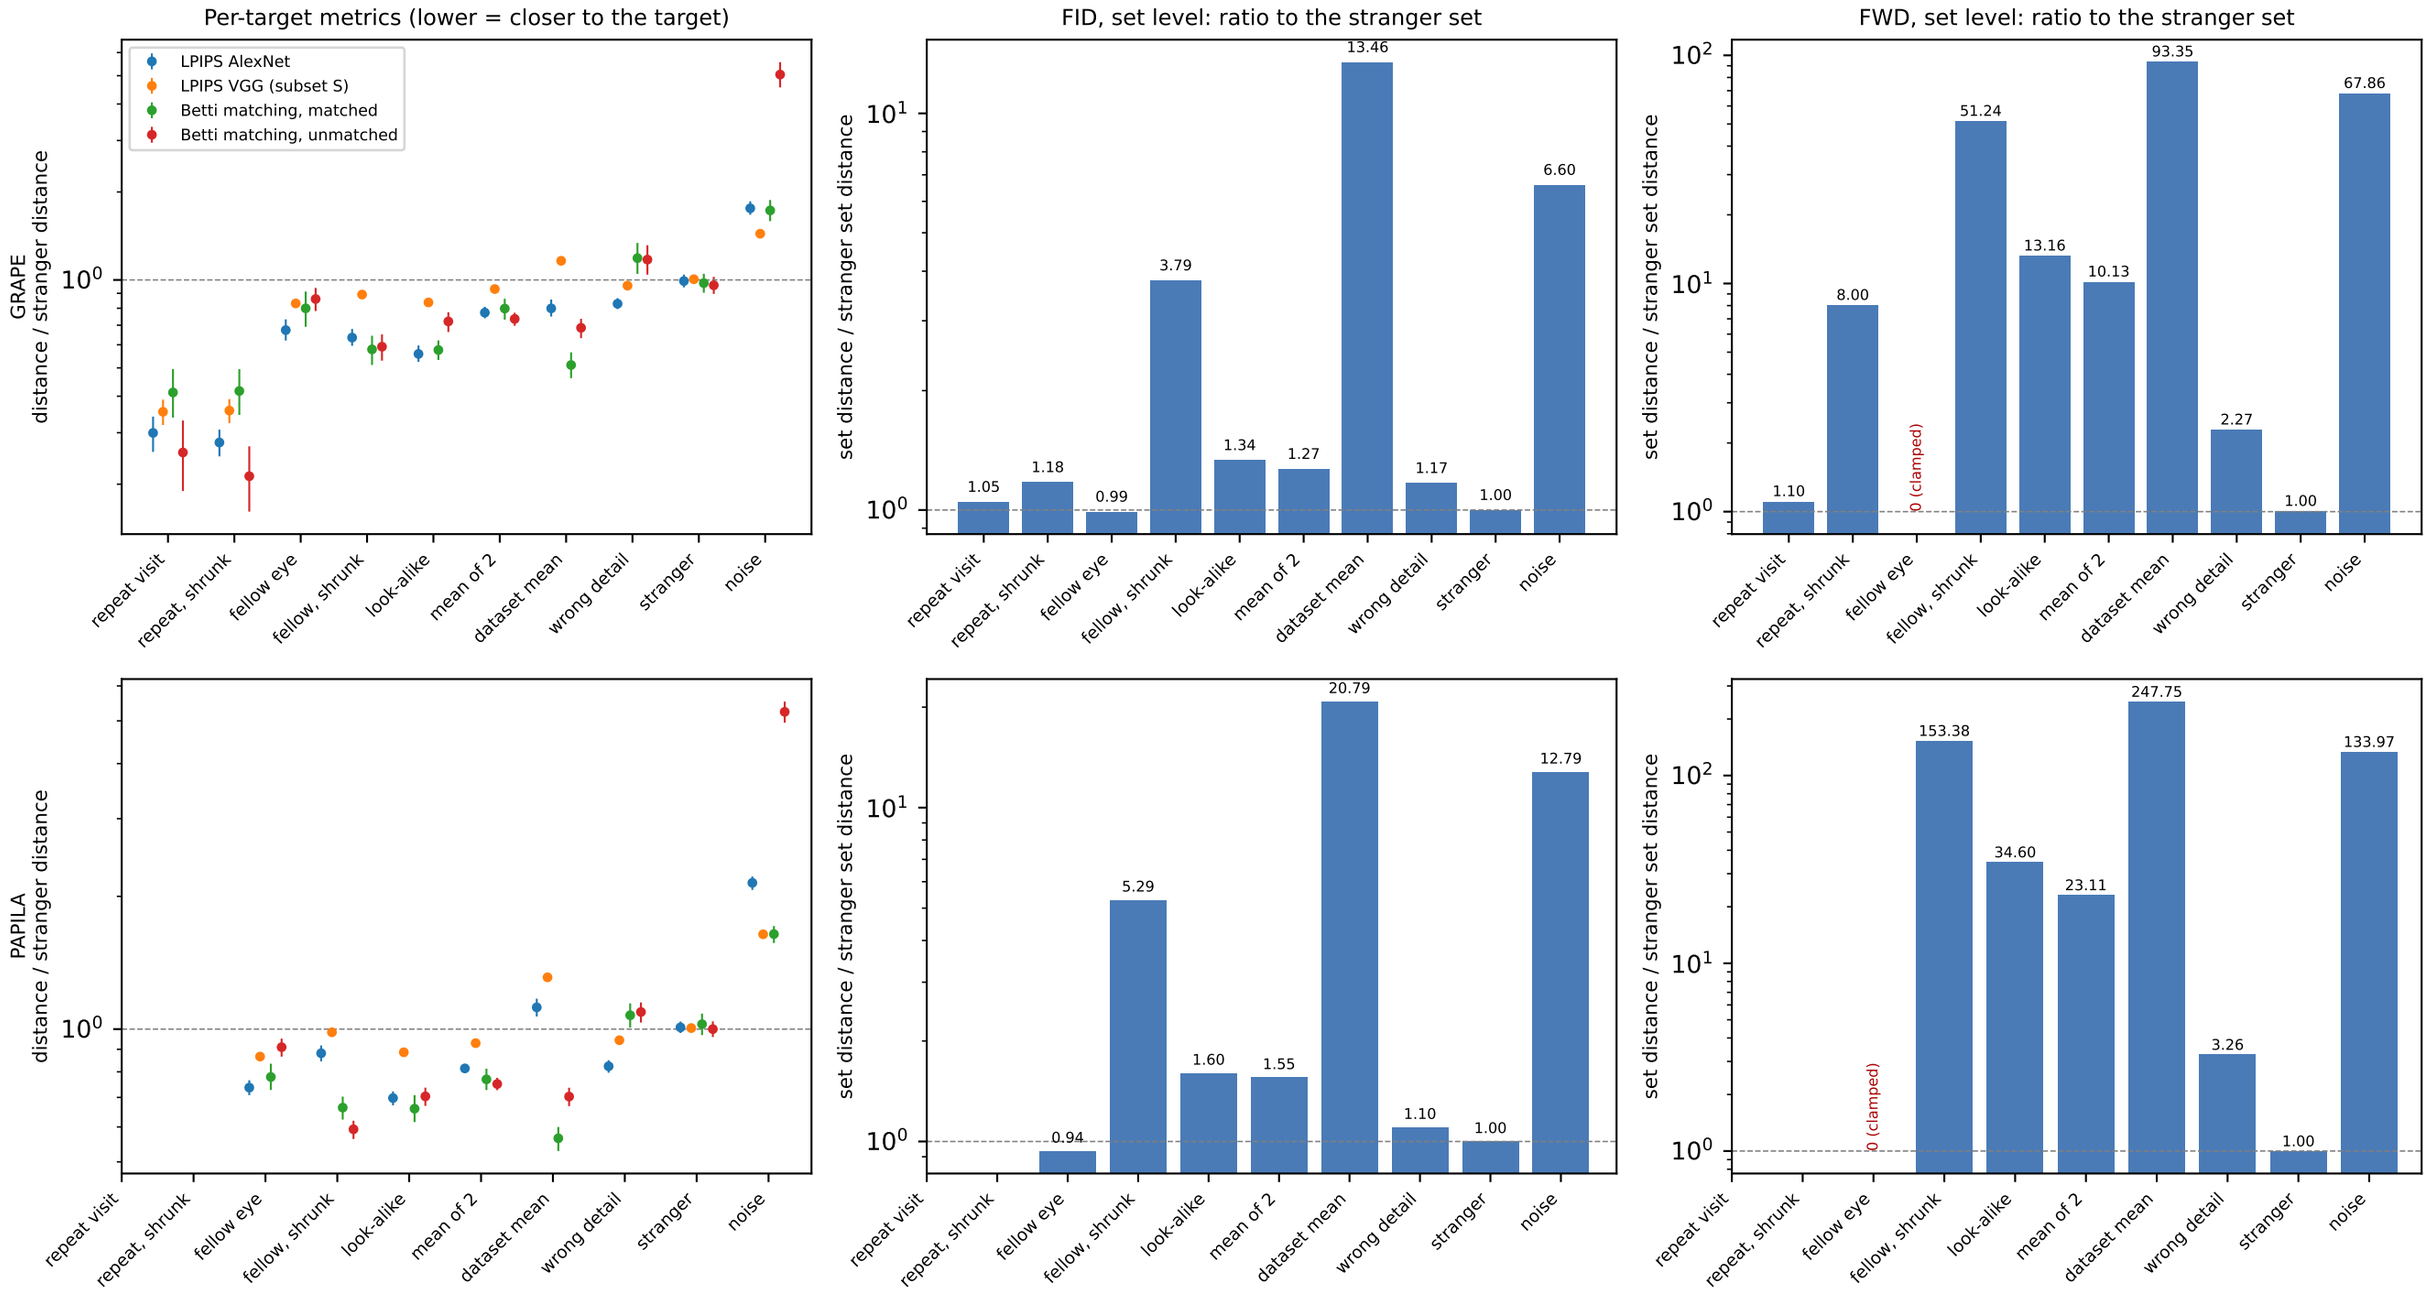
Fundus donor ladder, Amendment 9.15 metrics (GRAPE P8, PAPILA P9, 16 px window). Aggregates only; empty = rung not available. Pre-QC.
Per-target metrics (lower = closer to the target)
FID, set level: ratio to the stranger set
FWD, set level: ratio to the stranger set
LPIPS AlexNet
LPIPS VGG (subset S)
Betti matching, matched
Betti matching, unmatched
GRAPE
PAPILA
distance / stranger distance
set distance / stranger set distance
repeat visit
repeat, shrunk
fellow eye
fellow, shrunk
look-alike
mean of 2
dataset mean
wrong detail
stranger
noise
1.05
1.18
0.99
3.79
1.34
1.27
13.46
1.17
1.00
6.60
1.10
8.00
0 (clamped)
51.24
13.16
10.13
93.35
2.27
1.00
67.86
0.94
5.29
1.60
1.55
20.79
1.10
1.00
12.79
153.38
34.60
23.11
247.75
3.26
1.00
133.97
Per-target: R_self with person-bootstrap 95% CI. Set level: point values; their bootstrap intervals are biased and not shown (Amendment 9.15 outcome).