

ACC vs dataset mean
Spearman of rung order 0.98; order differs: none




GDT-like
Spearman of rung order 0.98; order differs: none

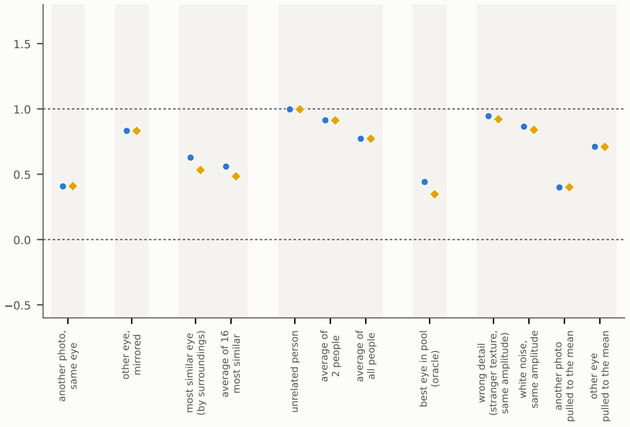


IDDT-like
Spearman of rung order 1.00; order differs: none

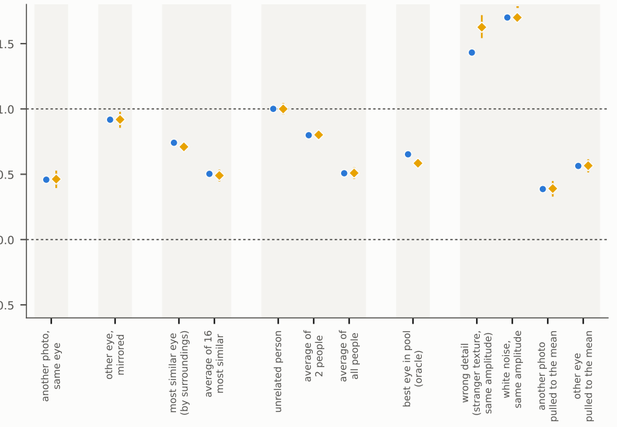


IDDT, repeat tolerance
Spearman of rung order 1.00; order differs: none

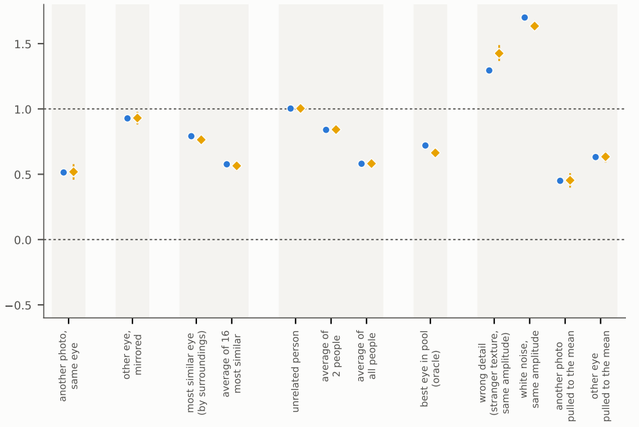


MAE
Spearman of rung order 0.99; order differs: repeat vs lookalike

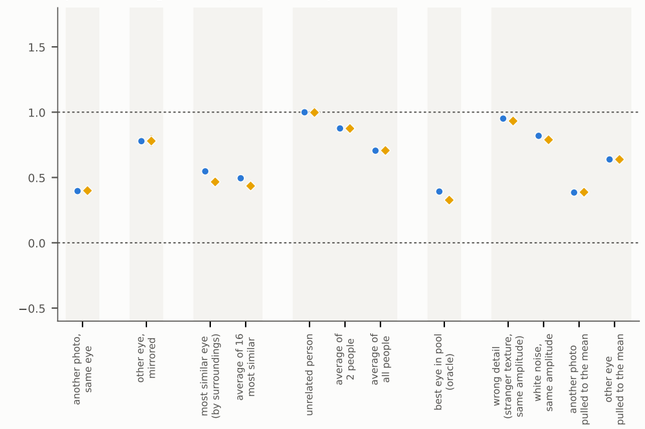


MS-SSIM
Spearman of rung order 0.97; order differs: none

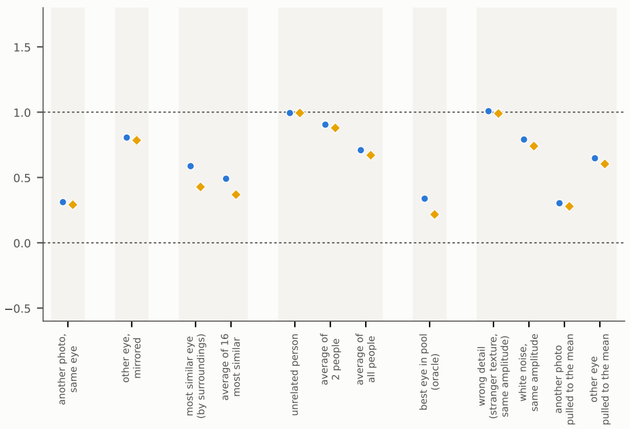


MSE
Spearman of rung order 0.99; order differs: none

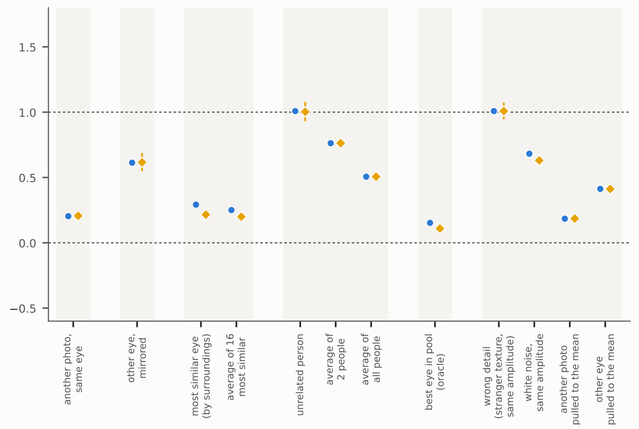


Pearson r
Spearman of rung order 0.97; order differs: none

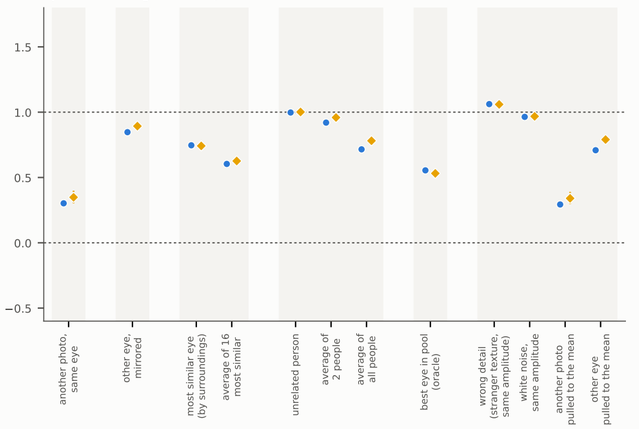


intensity persistence
Spearman of rung order 0.99; order differs: repeat vs lookalike

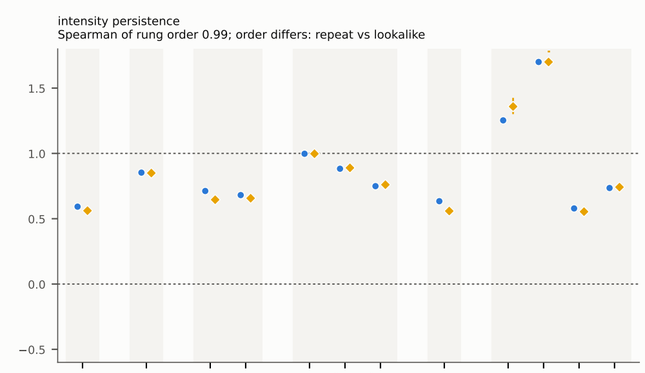


RMSE
Spearman of rung order 0.98; order differs: repeat vs lookalike

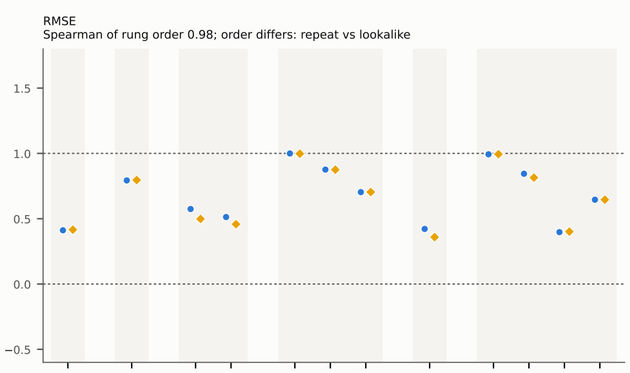


RMSE / repeat noise
Spearman of rung order 0.98; order differs: repeat vs lookalike

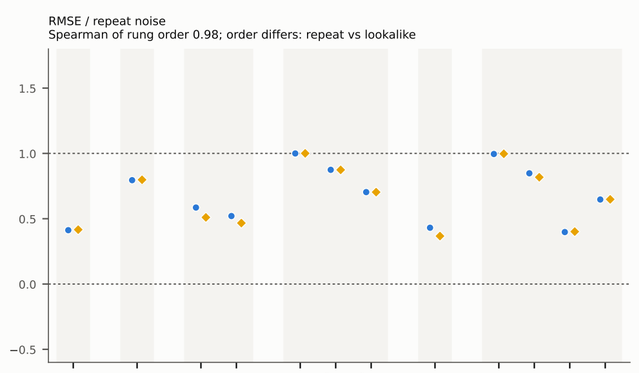

SSIM
Spearman of rung order 0.99; order differs: none

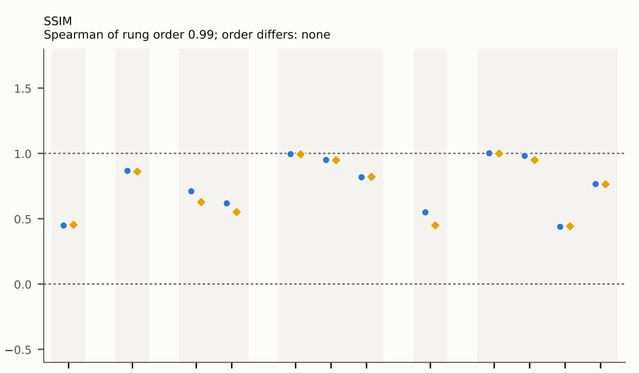

TM-like
Spearman of rung order 0.97; order differs: none

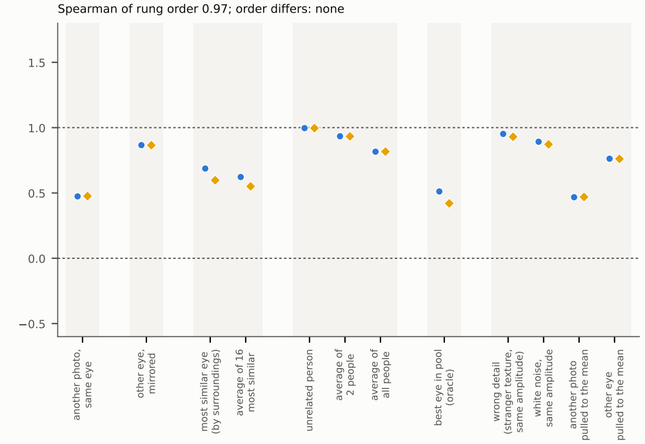

iris UTIRIS NIR, window in object units (D = 256 / pi strip columns)
16 px window (f = 0.2, reference) 10 px window (f = 1/8)

R = (d - d_self) / (d_stranger - d_self): 0 = the target itself, 1 = unrelated person (mean of 16). Bars: 95% interval at 10 px, bootstrap over people. Order differs = a pair of steps is separated by more than 0.1 on R at one size but not at the other (tie), or reversed. Amendment P4.