
Fundus, every location: pixel error against the dataset mean (pre-QC)

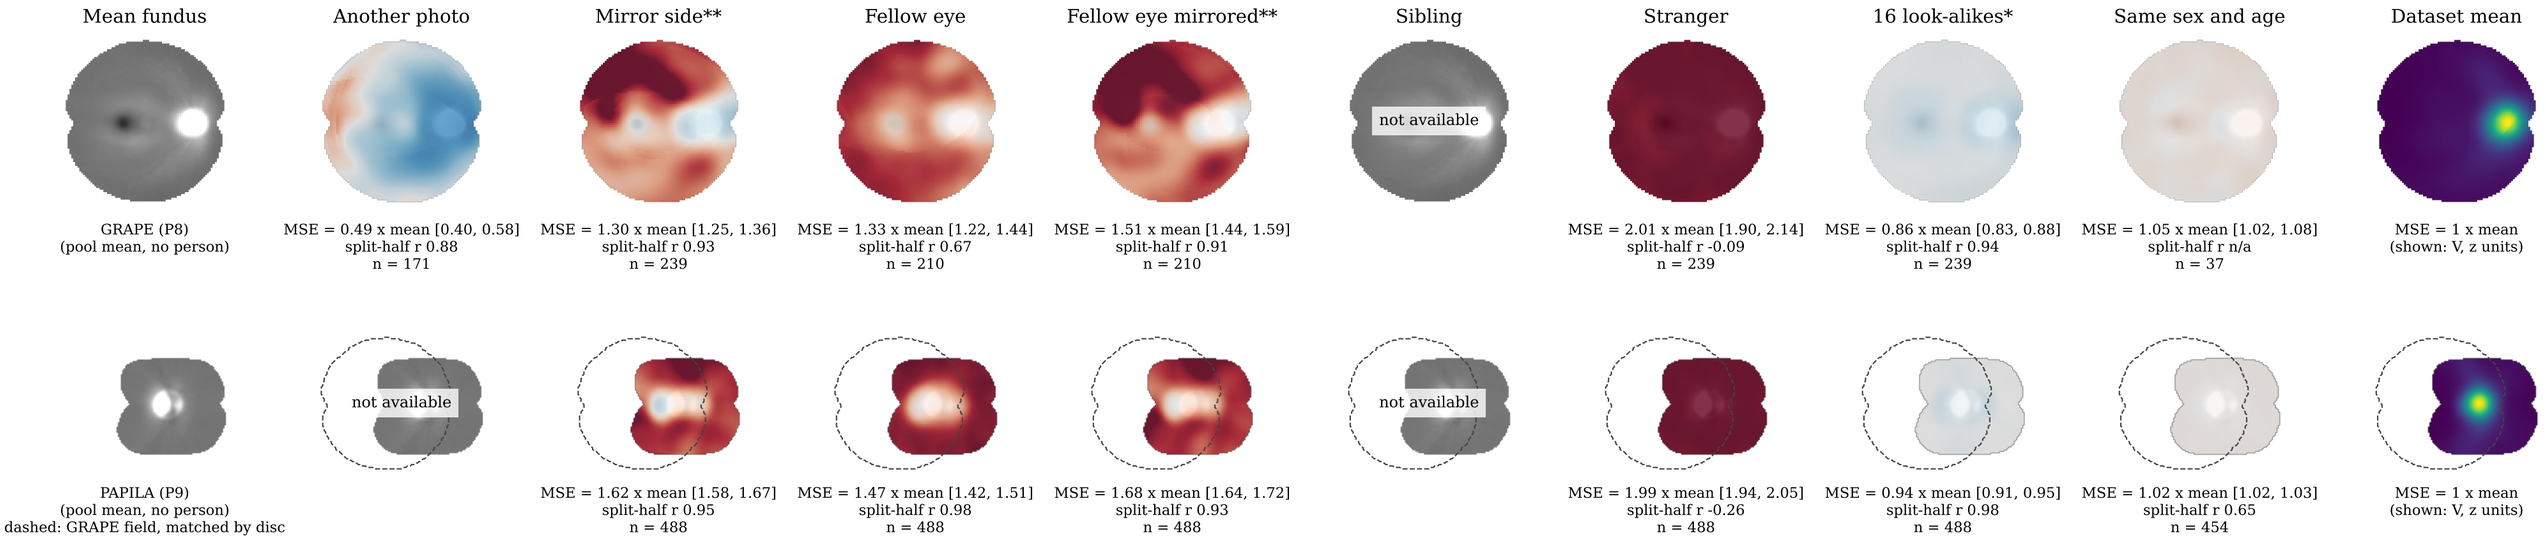

GRAPE (P8)
(pool mean, no person)

MSE = 0.49 x mean [0.40, 0.58]
split-half r 0.88
n = 171

MSE = 1.30 x mean [1.25, 1.36]
split-half r 0.93
n = 239

MSE = 1.33 x mean [1.22, 1.44]
split-half r 0.67
n = 210

MSE = 1.51 x mean [1.44, 1.59]
split-half r 0.91
n = 210

MSE = 2.01 x mean [1.90, 2.14]
split-half r -0.09
n = 239

MSE = 0.86 x mean [0.83, 0.88]
split-half r 0.94
n = 239

MSE = 1.05 x mean [1.02, 1.08]
split-half r n/a
n = 37

MSE = 1 x mean
(shown: V, z units)

PAPILA (P9)
(pool mean, no person)
dashed: GRAPE field, matched by disc

MSE = 1.62 x mean [1.58, 1.67]
split-half r 0.95
n = 488

MSE = 1.47 x mean [1.42, 1.51]
split-half r 0.98
n = 488

MSE = 1.68 x mean [1.64, 1.72]
split-half r 0.93
n = 488

MSE = 1.99 x mean [1.94, 2.05]
split-half r -0.26
n = 488

MSE = 0.94 x mean [0.91, 0.95]
split-half r 0.98
n = 488

MSE = 1.02 x mean [1.02, 1.03]
split-half r 0.65
n = 454

MSE = 1 x mean
(shown: V, z units)

One scale: 1 = dataset mean (white), 2 = stranger; blue beats the mean. * neighbours chosen on a 4 px grid by the 8 px ring around the 16 px window. ** the same eye reflected top-bottom about the disc-fovea line (2.5 px strip excluded);
PAPILA: line through the disc, fovea outside the field. 128 px frame, 16 px window; outside the field is missing. GRAPE P8, PAPILA P9 (Amendment 9.2); persons left out of their own pools. Dashed on PAPILA: GRAPE's field mapped by disc position and size (disc radius on the means: GRAPE 5 px, PAPILA 6 px).