


MSE: 6/7 expectations met

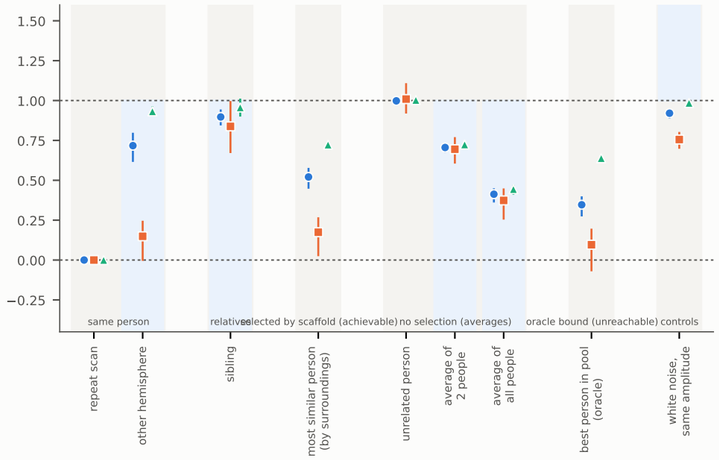

RMSE: 6/7 expectations met

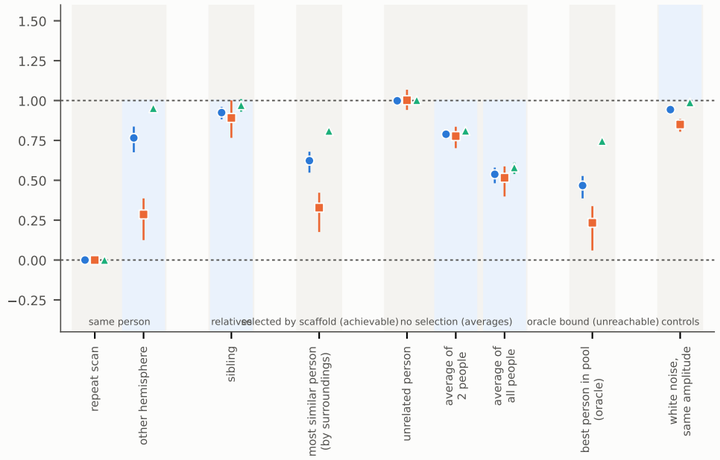


MAE: 6/7 expectations met

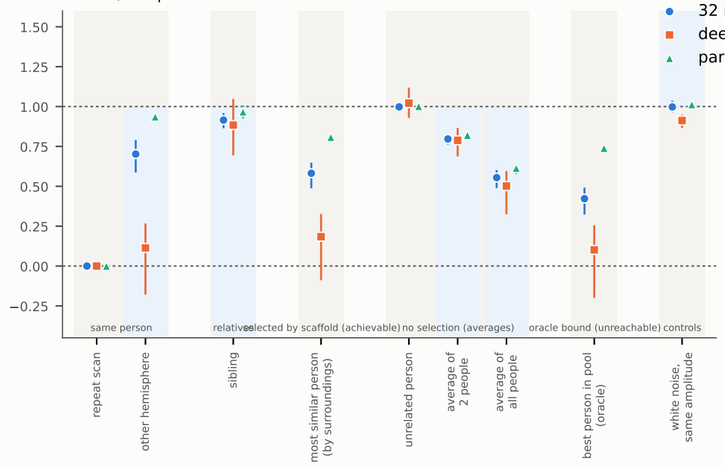


QTIM, both hemispheres
- 32 random cubes, 16 mm
- deep box
- parietal box


PSNR: 6/7 expectations met

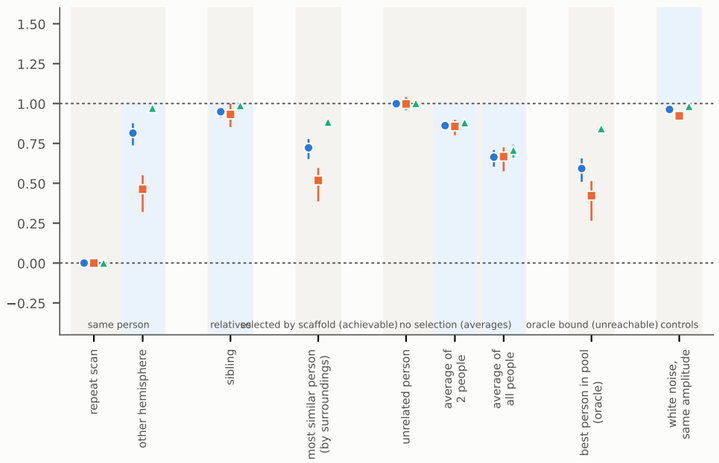


PSNR, fixed range: 6/7 expectations met

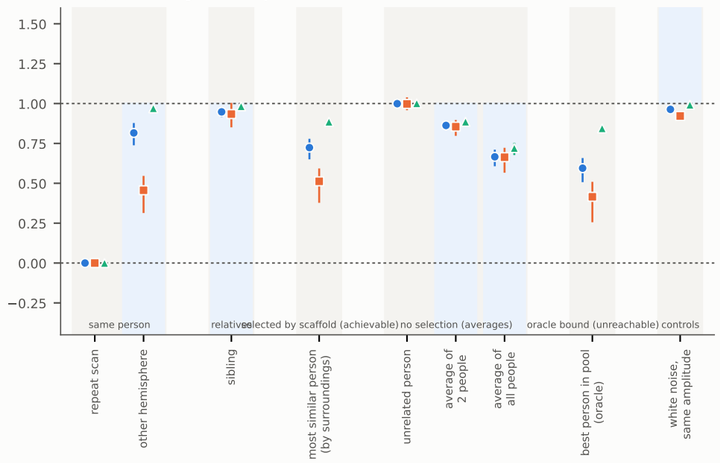


SSIM: 7/7 expectations met

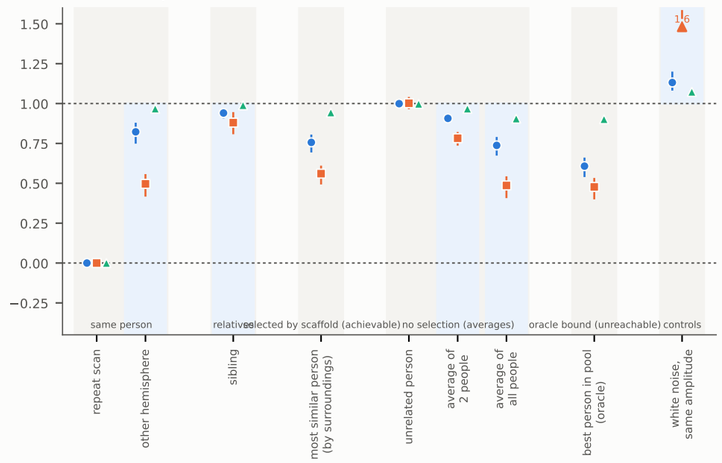


Pearson r: 6/7 expectations met

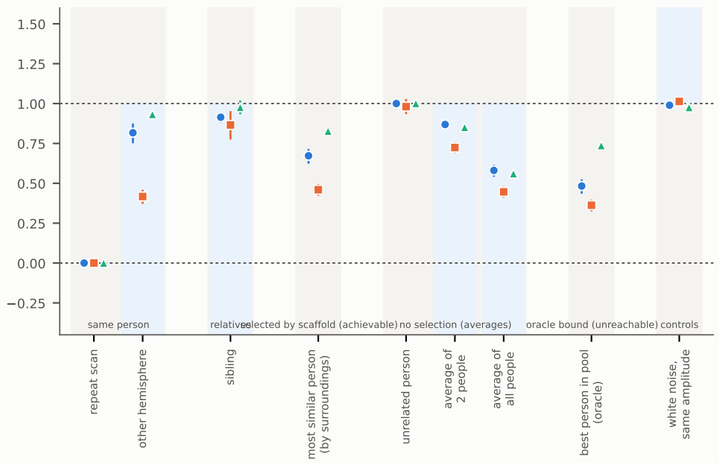


ACC vs dataset mean: 4/5 expectations met

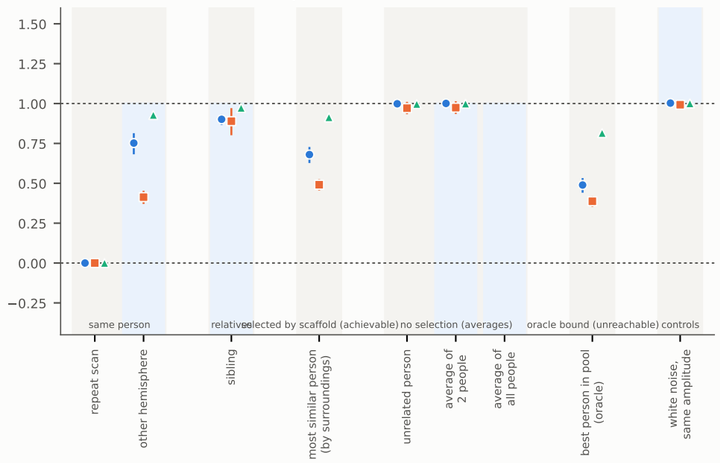

ACC vs sex-age mean: 5/7 expectations met

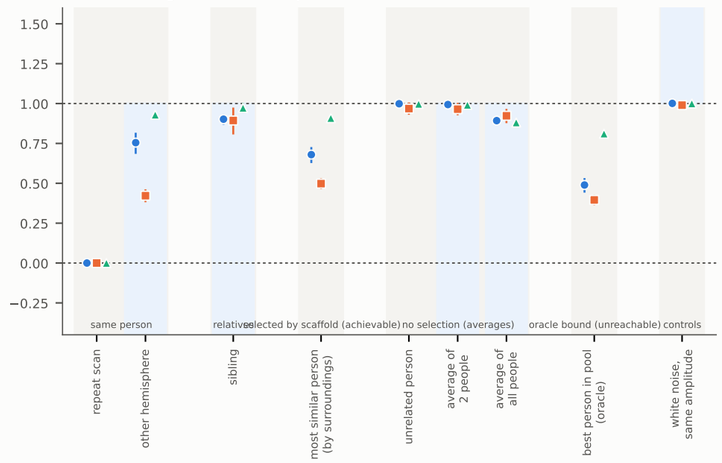

IDDT-like: 7/7 expectations met

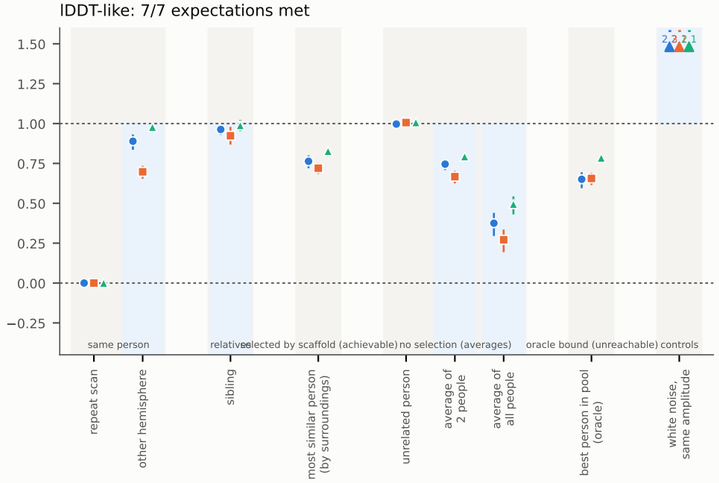

Expectations, random cubes (value = R or contrast)

	E1 mirror<str	E2 sib<str	E3B mean<str	E3B mean2<str	E3B order by k	E5B wrong~str	E6B noise>str
MSE	pass 0.72	pass 0.90	pass 0.41	pass 0.71	pass 0.41/0.71/1.00	pass 1.01	fail 0.92
RMSE	pass 0.77	pass 0.92	pass 0.54	pass 0.79	pass 0.54/0.79/1.00	pass 1.00	fail 0.94
MAE	pass 0.70	pass 0.92	pass 0.55	pass 0.80	pass 0.55/0.80/1.00	pass 1.00	fail 1.00
PSNR	pass 0.81	pass 0.95	pass 0.66	pass 0.86	pass 0.66/0.86/1.00	pass 1.00	fail 0.96
PSNR, fixed range	pass 0.82	pass 0.95	pass 0.67	pass 0.86	pass 0.67/0.86/1.00	pass 1.00	fail 0.96
SSIM	pass 0.82	pass 0.94	pass 0.74	pass 0.91	pass 0.74/0.91/1.00	pass 1.02	pass 1.13
Pearson r	pass 0.82	pass 0.91	pass 0.58	pass 0.87	pass 0.58/0.87/1.00	pass 1.01	fail 0.99
ACC vs dataset mean	pass 0.75	pass 0.90	n/a	fail 1.00	n/a	pass 1.00	pass 1.00
ACC vs sex-age mean	pass 0.75	pass 0.90	pass 0.89	fail 0.99	pass 0.89/0.99/1.00	pass 1.00	fail 1.00
IDDT-like	pass 0.89	pass 0.96	pass 0.38	pass 0.75	pass 0.38/0.75/1.00	pass 1.06	pass 2.16

R = (d - d_repeat) / (d_stranger - d_repeat): 0 = repeat scan, 1 = stranger (mean of 16). Bars: 95% interval, bootstrap over families. Blue bands: where an identity-faithful metric is expected (mirror and sibling below 1; averages, wrong detail and noise at or above 0.9).
pre-QC: affine registration only, MRI registration gate not met (results/registration/status.md)