HOUSE FIGURE & TABLE STYLE

Konhee Chang


October 12, 2026

This document demonstrates the house figure and table commands created by Konhee Chang. Figures are the PDFs written by `figures.do` *(both schemes); tables are the LaTeX fragments written by* `tables.do` *with the house* `esttab` *options.*

Figures


The house figure command covers the common shapes. `\housefigure` takes a body of `\panel{...}` calls: one panel is a single figure (optional uniform width `[<w>]`), several tile into a grid that wraps by how many `<w>`-wide panels fit across the text width (default `0.5\textwidth`, so two per row; an odd count centers the last). A `\panel` with `sub=` gets a lettered subcaption and (with `label=`) its own label, so the body can cross-reference a single panel – e.g. Figure 2A; a bare `\panel{path}` is just an image. (`\housesubfigure` is a kept alias.) The uniform width `[<w>]` drives the layout: above `0.5\textwidth` panels stack one per row (Figure 5), `0.33\textwidth` fits three across (Figure 6).

Figure 1. Single Figure (`\housefigure`, One `\panel`)

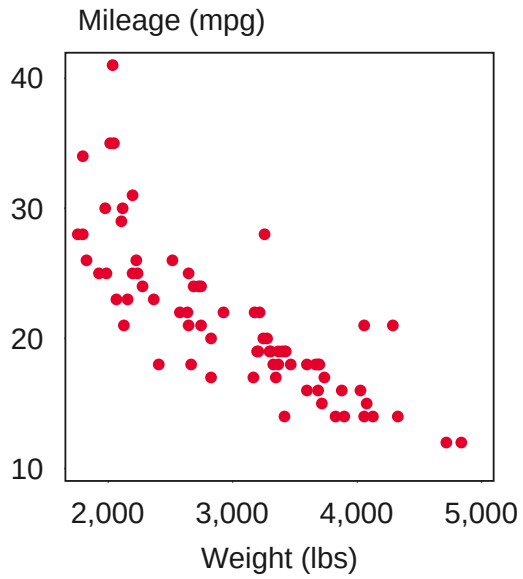


Notes. A lone figure at a set width. Omit the optional width to span `\textwidth`.

Figure 2. Panels with Subcaptions (`\panel` with `sub=`)

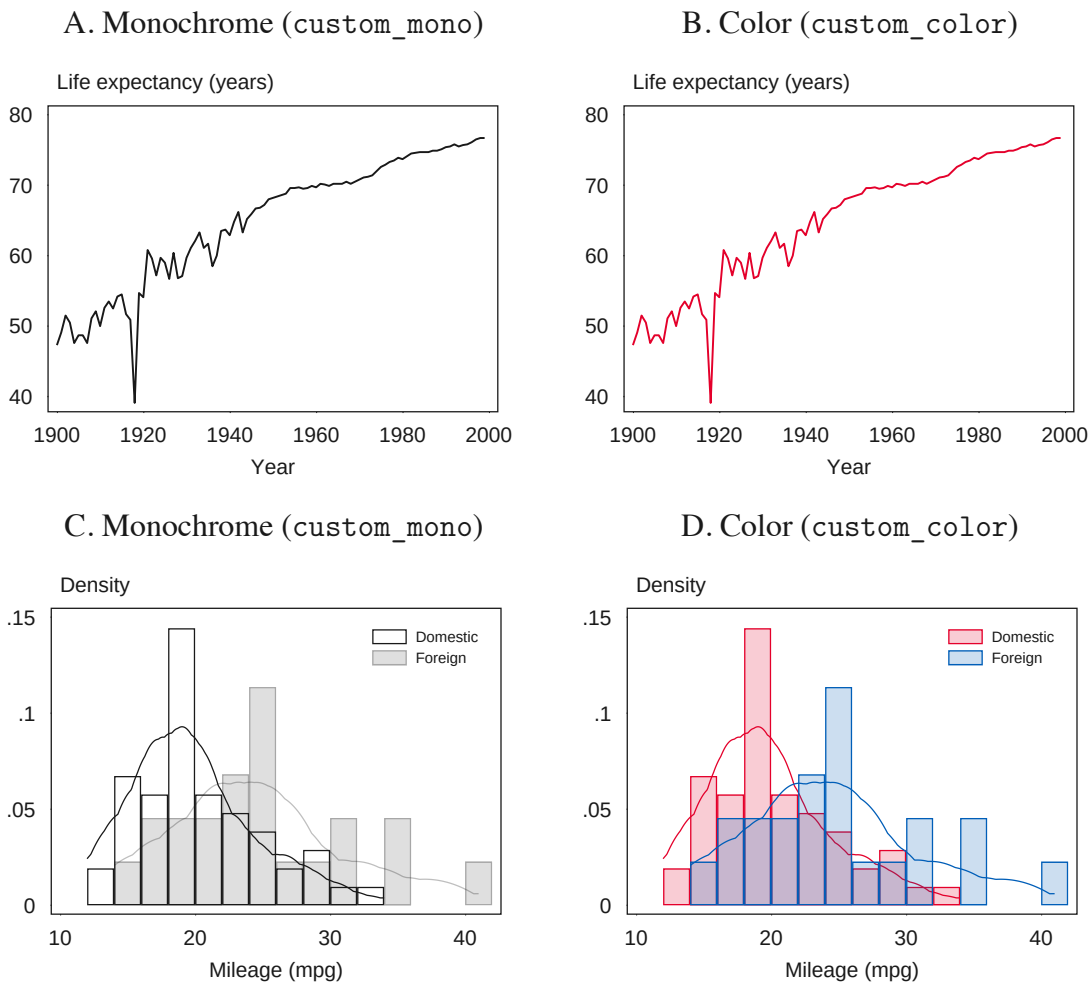


Notes. Each panel carries its own subcaption and label; reference a panel with `\autoref`, e.g. Figure 2B.

Figure 3. Grid (`\housefigure`, Six `\panel` → 2×3)

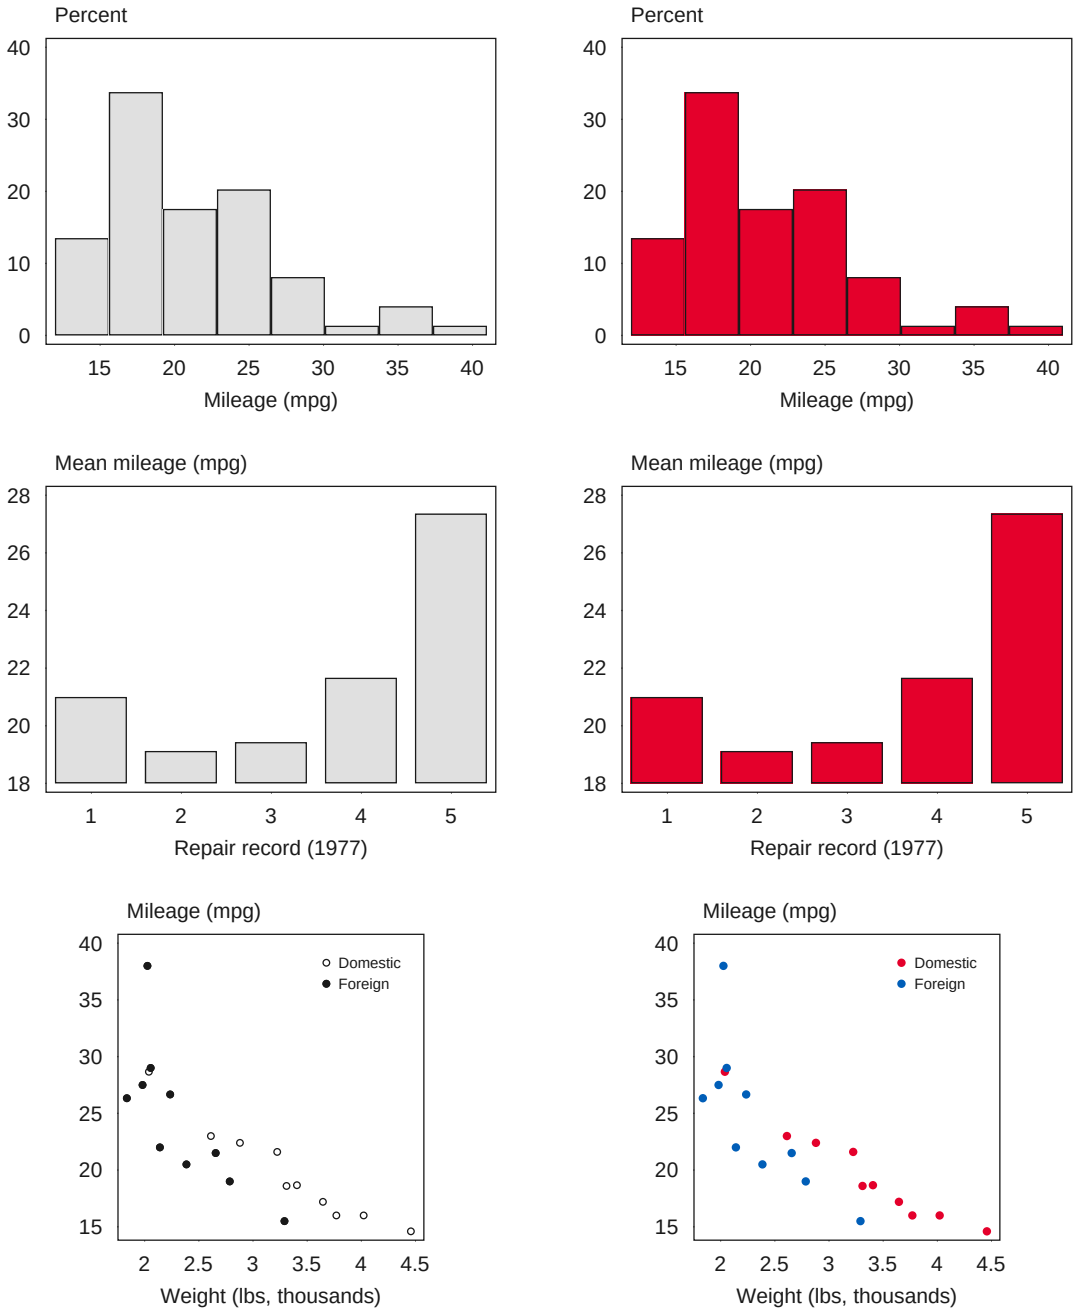

Notes. Bare `\panels` tile two per row at the default `0.5\textwidth`; set `[<w>]` to change how many fit across a row.


Figure 4. Grid (`\housefigure`, Four `\panel` → 2×2)

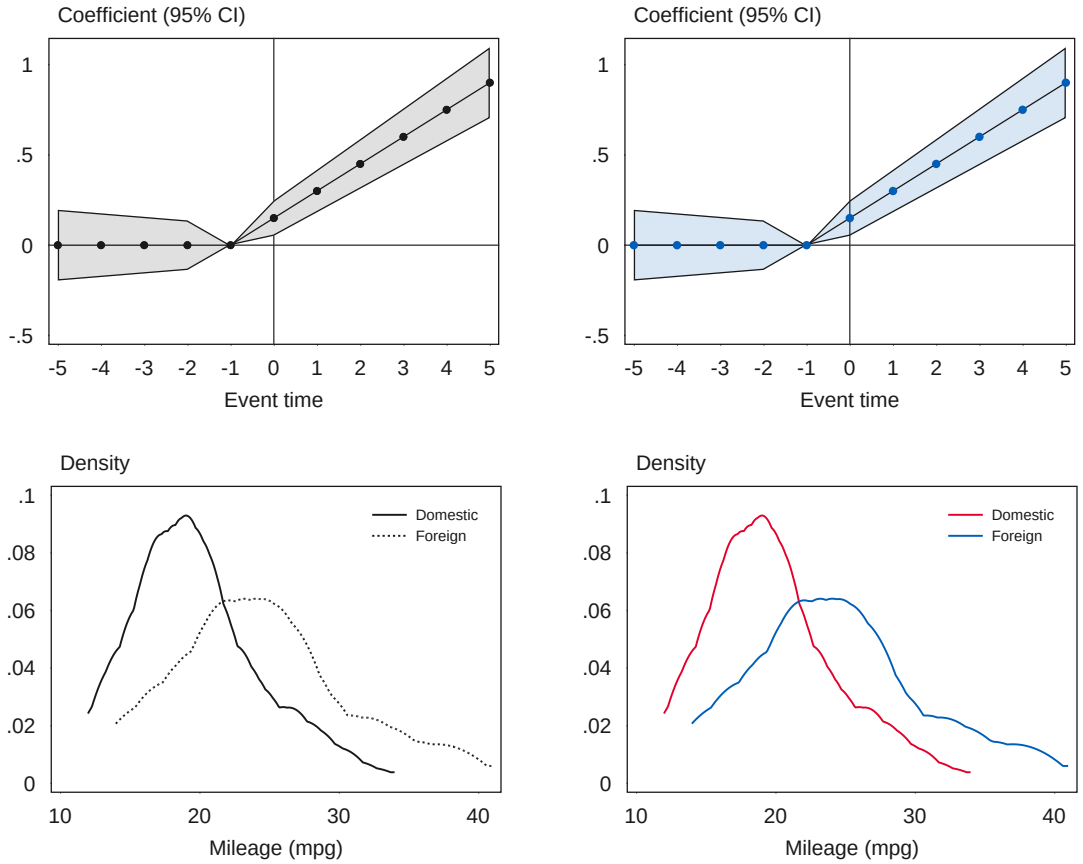


Notes. Bare `\panels` tile two per row at the default `0.5\textwidth`; set `[<w>]` to change how many fit across a row.

Figure 5. Wide Panels Stack (`[0.6\textwidth]` > Half → One per Row)

A. Monochrome

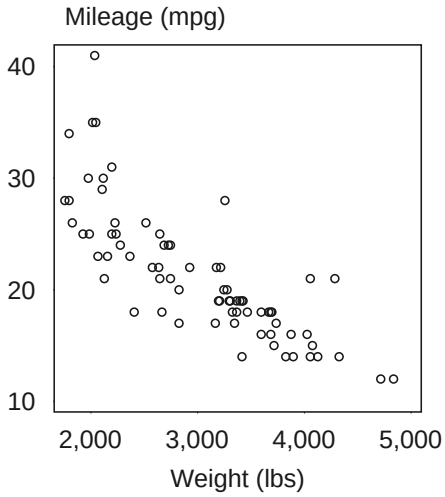


B. Color

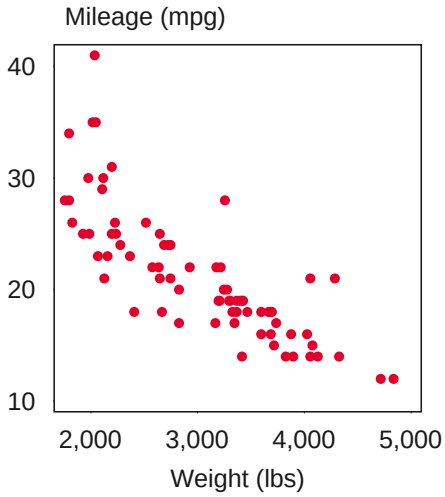

Notes. With a panel width above `0.5\textwidth`, only one panel fits per row, so the two panels stack vertically rather than sitting side by side.

Figure 6. Three-Column Layout (`[0.33\textwidth]` → Three per Row)

A. Time Series B. Bar C. Density

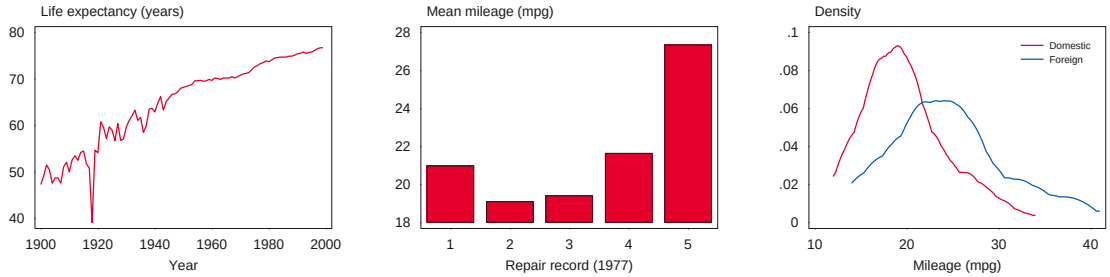

Notes. Setting the panel width to `0.33\textwidth` fits three panels across a row; a fourth would wrap to a centered second row.

Tables

Tables use `\housetable`, mirroring the figure syntax: a body of `\panel{frag.tex}` calls, wrapped in a `table` float with caption and notes. One `\panel` is a lone `\input`; several stack vertically, each with an "A." header when `sub=` is given (Table 5).

Table 1. Summary Statistics (Descriptive)

	Mean	SD	Min	Max	N
Price	6165.26	2949.50	3291	15906	74
Mileage (mpg)	21.30	5.79	12	41	74
Weight (lbs)	3019.46	777.19	1760	4840	74
Length (in)	187.93	22.27	142	233	74

Notes. Descriptive statistics for the built-in `auto` dataset (`estpost summarize`).

Table 2. Balance by Group (*t*-Test)

	Domestic	Foreign	Diff.	t
Price	6072.4	6384.7	-312.3	(-0.41)
Mileage (mpg)	19.8	24.8	-4.9***	(-3.63)
Weight (lbs)	3317.1	2315.9	1001.2***	(6.25)

Notes. Group means (domestic vs. foreign) and their difference; *t*-statistics in parentheses. * $p < 0.10$, ** $p < 0.05$, *** $p < 0.01$.

Table 3. Correlation Matrix

	Price	Mileage	Weight	Length
Price	1.000			
Mileage	-0.469	1.000		
Weight	0.539	-0.807	1.000	
Length	0.432	-0.796	0.946	1.000

Notes. Pairwise correlations, `auto` dataset. * $p < 0.10$, ** $p < 0.05$, *** $p < 0.01$.

Table 4. Regression Estimates (Nested OLS)

	(1)	(2)	(3)
Weight (lbs)	2.044***	1.747***	3.465***
	(0.377)	(0.641)	(0.631)
Mileage (mpg)		-49.512	21.854
		(86.156)	(74.221)
Foreign			3673.060***
			(683.978)
R-squared	0.290	0.293	0.500
Observations	74	74	74

Notes. OLS of price on nested regressor sets; standard errors in parentheses. * $p < 0.10$, ** $p < 0.05$, *** $p < 0.01$.

Table 5. Multi-Panel Table (`\panel` with `sub=` → Stacked Panels)

A. Summary Statistics

	Mean	SD	Min	Max	N
Price	6165.26	2949.50	3291	15906	74
Mileage (mpg)	21.30	5.79	12	41	74
Weight (lbs)	3019.46	777.19	1760	4840	74
Length (in)	187.93	22.27	142	233	74

B. Balance by Group

	Domestic	Foreign	Diff.	t
Price	6072.4	6384.7	-312.3	(-0.41)
Mileage (mpg)	19.8	24.8	-4.9***	(-3.63)
Weight (lbs)	3317.1	2315.9	1001.2***	(6.25)

Notes. Two fragments stacked in one float, each under an "A."/"B." header. Reference a panel with `\autoref`, e.g. Table 5B. * $p < 0.10$, ** $p < 0.05$, *** $p < 0.01$.