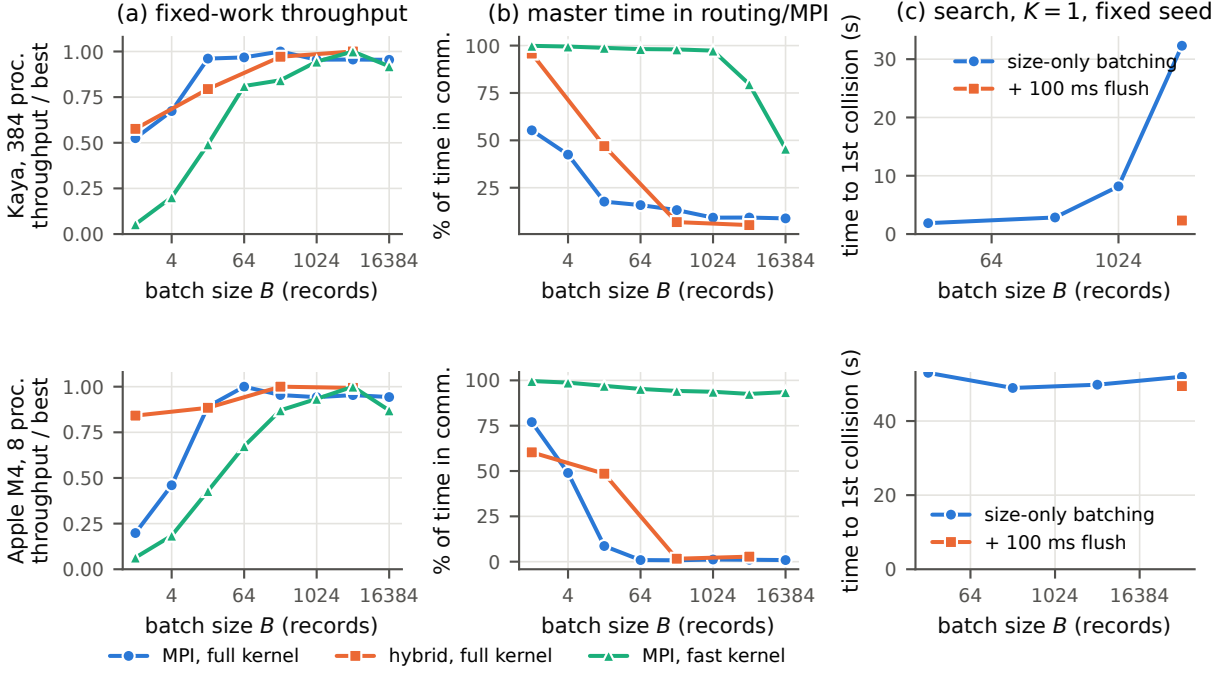
(a) fixed-work throughput
(b) master time in routing/MPI
(c) search, $K = 1$, fixed seed
Kaya, 384 proc. throughput / best
Apple M4, 8 proc. throughput / best
% of time in comm.
time to 1st collision (s)
batch size B (records)
size-only batching
+ 100 ms flush
MPI, full kernel
hybrid, full kernel
MPI, fast kernel