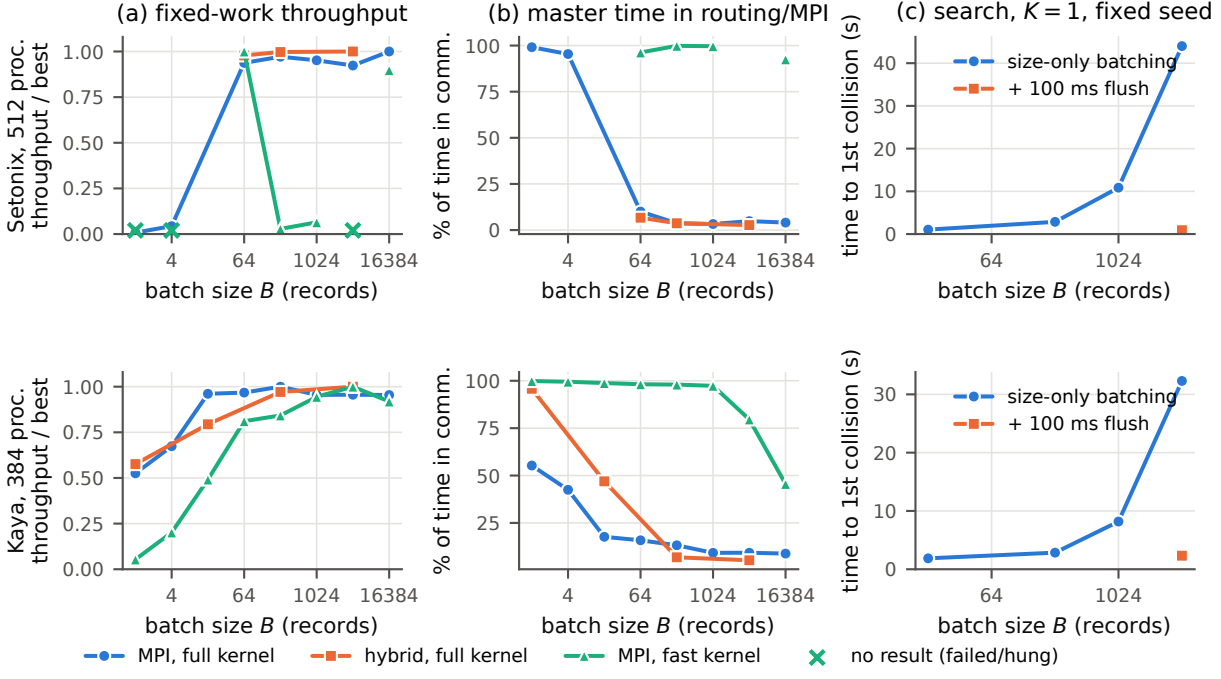
(a) fixed-work throughput
(b) master time in routing/MPI
(c) search, $K = 1$, fixed seed
Setonix, 512 proc.
throughput / best
Kaya, 384 proc.
throughput / best
% of time in comm.
time to 1st collision (s)
batch size $B$ (records)
size-only batching
+ 100 ms flush
MPI, full kernel
hybrid, full kernel
MPI, fast kernel
no result (failed/hung)