

Question No: 17

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: 2a031

In case of _____, you can test parts of the project without waiting for others to be completed.

Options

- Integration Testing
- Unit Testing
- End-to-end testing
- Acceptance Testing



Question No: 11

Multiple Choice (Select 1 out of 5 options, for the question below.)

QuestionId: 58014

_____ Is the main package for testing in Angular

Options

- @angular/core/testing
- @angular/testing
- @angular/common/testing
- @angular/testing/core
- @angular/testing/common

Question No: 15

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: 9a025

_____ is a technique that focuses more on capturing the requirements

Options

- TDD
- BDD
- ATDD
- RTDD



Question No: 08

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: 14072

If you want to test a service, it should be declared in _____ array

Options

- imports []
- providers[]
- declarations []
- bootstrap[]

Auto Next

Question No: 24

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: fa063

Which of the following matcher function is used to determine if the given variable is NAN or not ?

Options

- expect(number) NaN(),
- expect(number) IsNaN(),
- expect(number) toBeNaN(),
- expect(number) BeNaN(),

Question No: 03

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: 43035

Karma configuration file is _____

Options

- Karma config js
- Karma.js
- karma conf js
- karma json

Question No: 02

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: ef050

Which method is used to call when testing an Angular Pipe?

Options

- ngOnInit()
- constructor
- onInit()
- transform()

Question No: 22

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: a7011

_____ function is called after each test specification is run.

Options

- beforeAll()
- afterAll()
- beforeEach()
- afterEach()

Question No: 18

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: a3026

Choose the user/s who participate in ATDD

Options

- Developers
- Developers, Customer, QAs
- Customer
- QAs

Question No: 14

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: f6027

_____ is a type of software testing where individual units or components of a software are tested.

Options

- Integration Testing
- Unit Testing
- End-to-end testing
- Acceptance Testing

Question No: 06

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: a5043

In the context of Angular, the _____ holds the Component and provides a convenient interface to the DOM.

Options

- TestBed
- ComponentFixture
- describe()
- it()



Auto Next

Question No. 19**Multiple Choice (Select 1 out of 4 options, for the question below.)****QuestionId:** dc068

_____ matcher is used in Jasmine to check whether the result is equal to true or false.

Options

- expect(number)toBe(),
- expect(number)toBeTruthy(),
- expect(number)isTruthy(),
- expect(number)isTrue(),

Question No: 23

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: e1005

_____ a collection of individual Test Specs.

Options

- Test Mock
- Test Suite
- Test Stubs
- Test Entry

Question No: 05

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: 14057

What is the correct approach to create a testing module using Angular's TestBed utility?

Options

- TestBed configureTestingModule()
- Testbed defineTests()
- TestBed.configureTests()
- Testbed createTestingModule()

Question No: 04

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: 83055

What is the purpose of Angular's By class ?

Options

- Generating predicates that target certain elements in templates
- Initialize a DebugElement
- Trigger data binding
- Querying elements in templates





Question No: 10

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: 8c052

Which method can be used to create a Jasmine spy?

Options

- getSpy()
- getSpyObj()
- createSpyObj()
- CreateSpy()

Question No: 07

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: 33041

AAA stands for _____

Options

Act,Arrange,Assert

Assert,Arrange,Act

Arrange,Act,Assert

Act,Assert,Arrange

Question No: 16

Multiple Choice (There may be more than 1 correct answer)

QuestionId: 3f030

Choose the valid statements w.r.t Unit Testing

Options

- Unit testing is a white box testing
- Unit testing is a black box testing
- Unit testing is performed by the developer
- Unit testing is performed by the tester

Auto Next

Question No: 20

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: 66010

_____ function is called once, before all the specs in a test suite are run.

Options

- beforeAll()
- afterAll()
- beforeEach()
- afterEach()



Question No: 09

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: 3e058

Given a TestBed configured to test a component "myComponent," how can we get an instance

Options

- TestBed.createComponent(myComponent) componentInstance()
- TestBed.createComponentFixture(myComponent)
- TestBed.component(myComponent) componentInstance
- TestBed.createComponent(myComponent) componentInstance

03	04	05
08	09	10
13	14	15
18	19	20
23	24	25

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: d5075

_____ keyword is used to indicate that the function is asynchronous

Options

- defer
- resolve
- await
- awaiter

10
15
20
25

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: 8c052

Which method can be used to create a Jasmine spy?

Options

- getSpy()
- getSpyObj()
- createSpyObj()
- createSpy()

07	08	09	10
12	13	14	15
17	18	19	20
22	23	24	25

Multiple Choice (Select 1 out of 4 Options)

QuestionId: ce007

_____ function defines an individual Test Specs

Options

- describe()
- expect()
- matcher ()

2	03	04	05
7	08	09	10
2	13	14	15
7	18	19	20
2	23	24	25

Multiple Choice (Select 1 out of 5 options, for the question below.)

QuestionId: 58014

_____ is the main package for testing in Angular

Options

- @angular/core/testing
- @angular/testing
- @angular/common/testing
- @angular/testing/core
- @angular/testing/common

07	08	09	10
12	13	14	15
17	18	19	20
22	23	24	25

Multiple Choice (Select 1 out of 4 options, for the question below)

QuestionId: aa002

_____ is the default test runner for applications created with the Angular CLI.

Options

- Jasmine
- Karma
- Cypress
- Jest

01	02	03	04	05
06	07	08	09	10
11	12	13	14	15
16	17	18	19	20
21	22	23	24	25

Question No. 23

Multiple Choice (There may be more than 1 correct answer)

QuestionId: ad009

Choose the predefined matchers in the following

Options

- toBe()
- toBeTruthy()
- toBeNumber()
- toBeString()
- toBeAlways()

06	07	08	09	10
11	12	13	14	15
16	17	18	19	20
21	22	23	24	25

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: ef050

Which method is used to call when testing an Angular Pipe?

Options

- ngOnInit()
- constructor
- OnInit()
- transform()

01	02	03	04	05
06	07	08	09	10
11	12	13	14	15
16	17	18	19	20
21	22	23	24	25

Question No. 21

Multiple Choice { Select 1 out of 4 options, for the question below. }

QuestionId: eb064

Which of the following matcher function is used to test greater than condition ?

Options

- expect(number).Greater(number);
- expect(number).GreaterThan(number);
- expect(number).toBeGreaterThan(number);
- expect(number).IsGreater(number);

06	07	08	09	10
11	12	13	14	15
16	17	18	19	20
21	22	23	24	25

Multiple Choice (Select 1 out of 4 options, for the question below)

QuestionId: 75054

What Angular cli command can be used to run all tests located in a CLI based app?

Options

- ng test all
- ng test
- ng test build
- ng new test

11	12	13	14	15
16	17	18	19	20
21	22	23	24	25

Multiple Choice (There may be more than 1 correct answer)

QuestionId: 3f030

Choose the valid statements w.r.t Unit Testing

Options

- Unit testing is a white box testing
- Unit testing is a black box testing
- Unit testing is performed by the developer.
- Unit testing is performed by the tester

06	07	08	09	10
11	12	13	14	15
16	17	18	19	20
21	22	23	24	25

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: c2071

If you want to test a component, it should be declared in _____ array

Options

- imports []
- providers[]
- declarations []
- bootstrap[]

01	02	03	04	05
06	07	08	09	10
11	12	13	14	15
16	17	18	19	20
21	22	23	24	25

Question No. 18

Multiple Choice (Select 1 out of 4 options, for the question below)

QuestionId: 83013

You may need to perform some cleanup activities after you have finished testing. This is known as _____

Options

- setup
- exit
- cleanup
- ~~test~~ wn

01	02	03	04	05
06	07	08	09	10
11	12	13	14	15
16	17	18	19	20
21	22	23	24	25

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: 25042

_____ is the phase where the code behavior is checked and verified

Options

- Act
- Assert
- Arrange
- ~~Test~~

01	02	03	04	05
06	07	08	09	10
11	12	13	14	15
16	17	18	19	20
21	22	23	24	25

Question No. 25

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: b9012

_____ function is called before each test specification is run.

Options

- beforeAll()
- afterAll()
- beforeEach()
- afterEach()

26	07	08	09	10
11	12	13	14	15
16	17	18	19	20
21	22	23	24	25

Multiple Choice (Select 1 out of 4 options, for the question below)

QuestionId: 43035

Karma configuration file is _____

Options

- Karma.config.js
- Karma.js
- karma conf.js
- karma.json

06	07	08	09	10
11	12	13	14	15
16	17	18	19	20
21	22	23	24	25

Question No. 11:

Multiple Choice (Select 1 out of 4 options, for the question below)

QuestionId: 98006

_____ function defines a test suite

Options

- it()
- describe()
- expect()
- matcher ()

01	02	03	04	05
06	07	08	09	10
11	12	13	14	15
16	17	18	19	20
21	22	23	24	25

Question No. 20

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: 01008

_____ function describes an expected piece of behavior in the application.

Options

- it()
- de[REDACTED]()
- expect()
- matcher()

01	02	03	04	05
06	07	08	09	10
11	12	13	14	15
16	17	18	19	20
21	22	23	24	25

QuestionId: 0a022

What are the benefits of TDD

Options

- Encourages the development of cleaner and better designs
- Helps explore bugs or errors very quickly
- Helps to write smaller code
- Increases amount of time required for rework

11	12	13	14	15
16	17	18	19	20
21	22	23	24	25

Question No: 16

Multiple Choice (Select 1 out of 4 options, for the question below)

QuestionId: ff032

_____ is defined as a type of testing where software modules are integrated logically and tested as a group.

Options

- Integration Testing
- Unit Testing
- Sanity testing
- API testing

06	07	08	09	10
11	12	13	14	15
16	17	18	19	20
21	22	23	24	25

Multiple Choice (There may be more than 1 correct answer)

QuestionId: 9c037

Choose the Jasmine functions that are only called once

Options

- beforeEach()
- afterEach()
- ~~beforeAll()~~
- ~~afterAll()~~

06	07	08	09	10
11	12	13	14	15
16	17	18	19	20
21	22	23	24	25

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: 14057

What is the correct approach to create a testing module using Angular's TestBed utility?

Options

- TestBed.configureTestingModule()
- TestBed.defineTests()
- TestBed.configureTests()
- TestBed.createTestingModule()

01	02	03	04	05
06	07	08	09	10
11	12	13	14	15
16	17	18	19	20
21	22	23	24	25

Question No. 10

Multiple Choice (Select 1 out of 4 options, for the question below)

QuestionId: Be045

Angular ships with predefined predicate functions like _____ to query the DOM using familiar CSS selectors.

Options

- getDOM()
- queryDom()
- ~~query()~~
- queryAllDOM()

01	02	03	04	05
06	07	08	09	10
11	12	13	14	15
16	17	18	19	20
21	22	23	24	25

Question No: 17

Multiple Choice (Select 1 out of 4 options, for the question below :)

QuestionId: 2a031

In case of _____, you can test parts of the project without waiting for others to be completed.

Options

- Integration Testing
- Unit Testing
- End-to-end testing
- Acceptance Testing

06	07	08	09	10
11	12	13	14	15
16	17	18	19	20
21	22	23	24	25

Multiple Choice (Select 1 out of 4 options, for the question below)

QuestionId: 22016

You can disable tests without commenting them out by just pre-pending _____ to the describe / it functions

Options

- a
- x
- #
- @

01	02	03	04	05
06	07	08	09	10
11	12	13	14	15
16	17	18	19	20
21	22	23	24	25

Multiple Choice (There may be more than 1 correct answer)

QuestionId. c5039

Choose the Jasmine functions which are called before and after each spec

Options

- beforeEach()
- afterEach()
- beforeAll()
- afterAll()

01	02	03	04	05
06	07	08	09	10
11	12	13	14	15
16	17	18	19	20
21	22	23	24	25

Question No. 22:

Multiple Choice (Select 1 out of 4 options, for the question below)

QuestionId: eb066

Jasmine will only run specific suite of tests instead of all tests in the Application if you use _____

Options

- xdescribe()
- tdescribe()
- rdescribe()
- idescribe()

Result: Partially correct. The correct answers are indicated.

Options

beforeAll, afterAll

A B C D E

✗ Incorrect answers. C, D, E are the correct answers.

beforeEach, afterEach

A B C D E

✗ Incorrect answers. A, B, C are the correct answers.

Answer Choices

- A: Variables can be initialized
- B: The functions are called
- C: Used to define variables
- D: Variables are not reinitialized in subsequent specs
- E: The functions are only

Buttons

Save and Exit Next Question



Type here to search



93%

Esc

F1

F2

F3

F4

F5

F6

F7

F8

F9

F10

~

!@#

\$%

-*

=

=

*

^

!

!

1

2

3

4

5

6

7

8

9

0

Q

W

E

R

T


Y

U

I

O

P



Library

Search...



Deploying & Using Jasmine

Question 12 of 12

Question: In Jasmine, how can we make individual specs pending?

Result: Partially correct. The correct answers are indicated.

Invoke the `xdescribe` function

Use the `xit` function

✓ *Correct answer.*

Invoke the `it` function

✗ *Incorrect answer.*

Use the `pending` function within a spec


✓ *Correct answer.*

Create a spec that has no function

✓ *Correct answer.*

Save and Exit

Done



93%

34°C R

LEGION



Percipio Course Test: Deploying < Mail - keerthana I - Outlook

mphasis.percipio.com/courses/936eadb1-14c0-11e7-92d9-0242c0a80b07/assessment/e9ce5160-6d85-11e7-b71a-d6770bc9ef46/challenge/9b

YouTube Maps Gmail Discussion About S... java OneDrive Manage your Mpha...

Mphasis The Best Applied Library Search... 

Deploying & Using Jasmine

Question 11 of 12

Question: Which function would be executed to disable or make an entire test suite pending?

Result: Incorrect. The correct answer is indicated.

xdescribe
✓ *Correct answer.*


afterAll


beforeAll
✗ *Incorrect answer.*

xit

it

describe



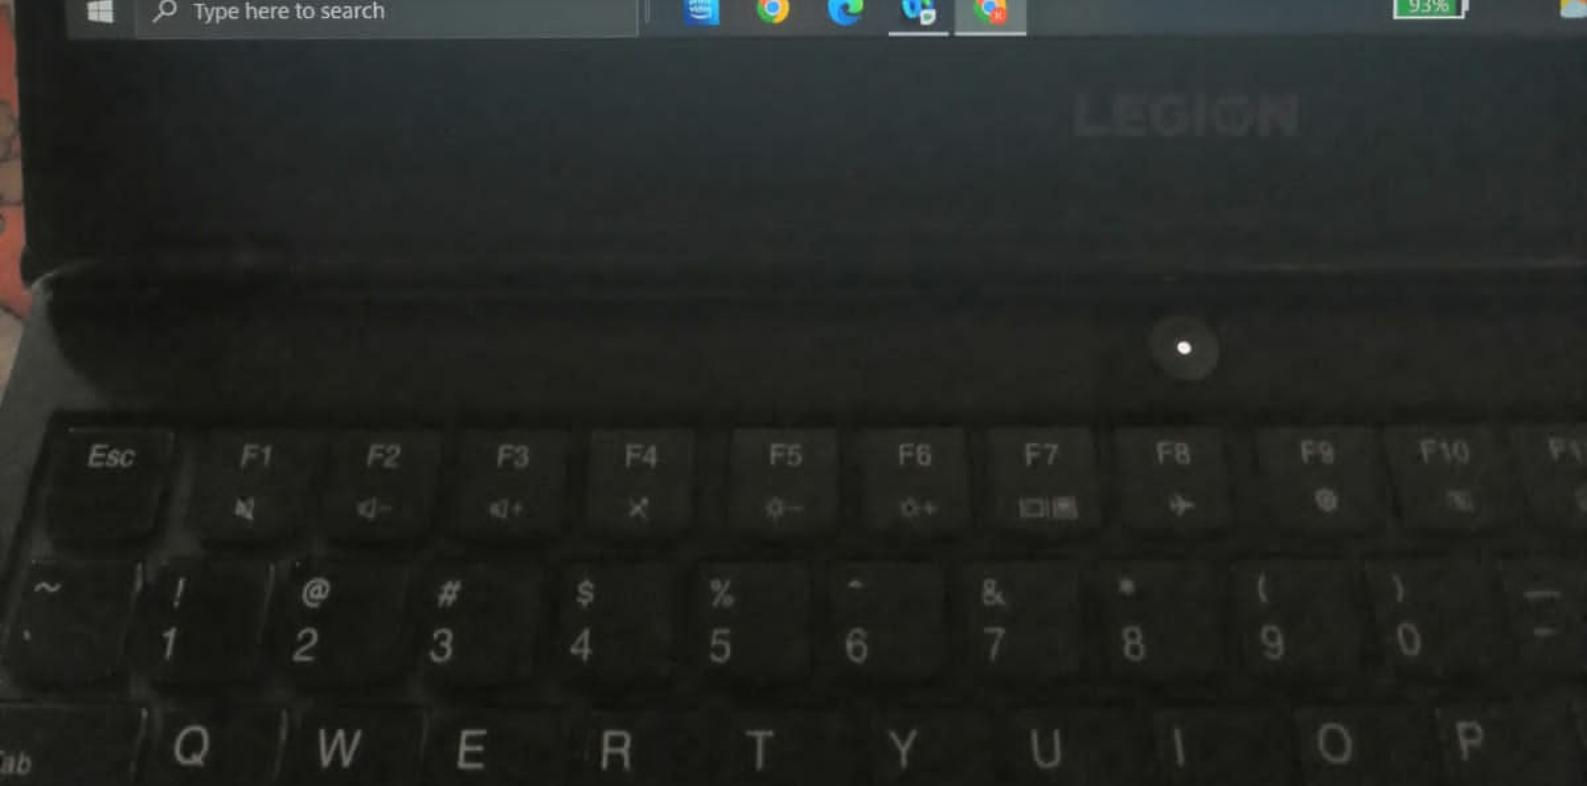essment/e9ce5160-6d85-11e7-b71a-d6770bc9ef46/challenge/9b3e013e-6c48-48cb-87b4-da8ff55b78d... Paused


Search...

KL Keerthana

Answer Choices

- A: Variables can be initialized before and after each spec
- B: The functions are called before and after each spec
- C: Used to define variable Test-suite scope
- D: Variables are not reinitialized after the first spec, and retain values between subsequent specs
- E: The functions are only called once

Settings

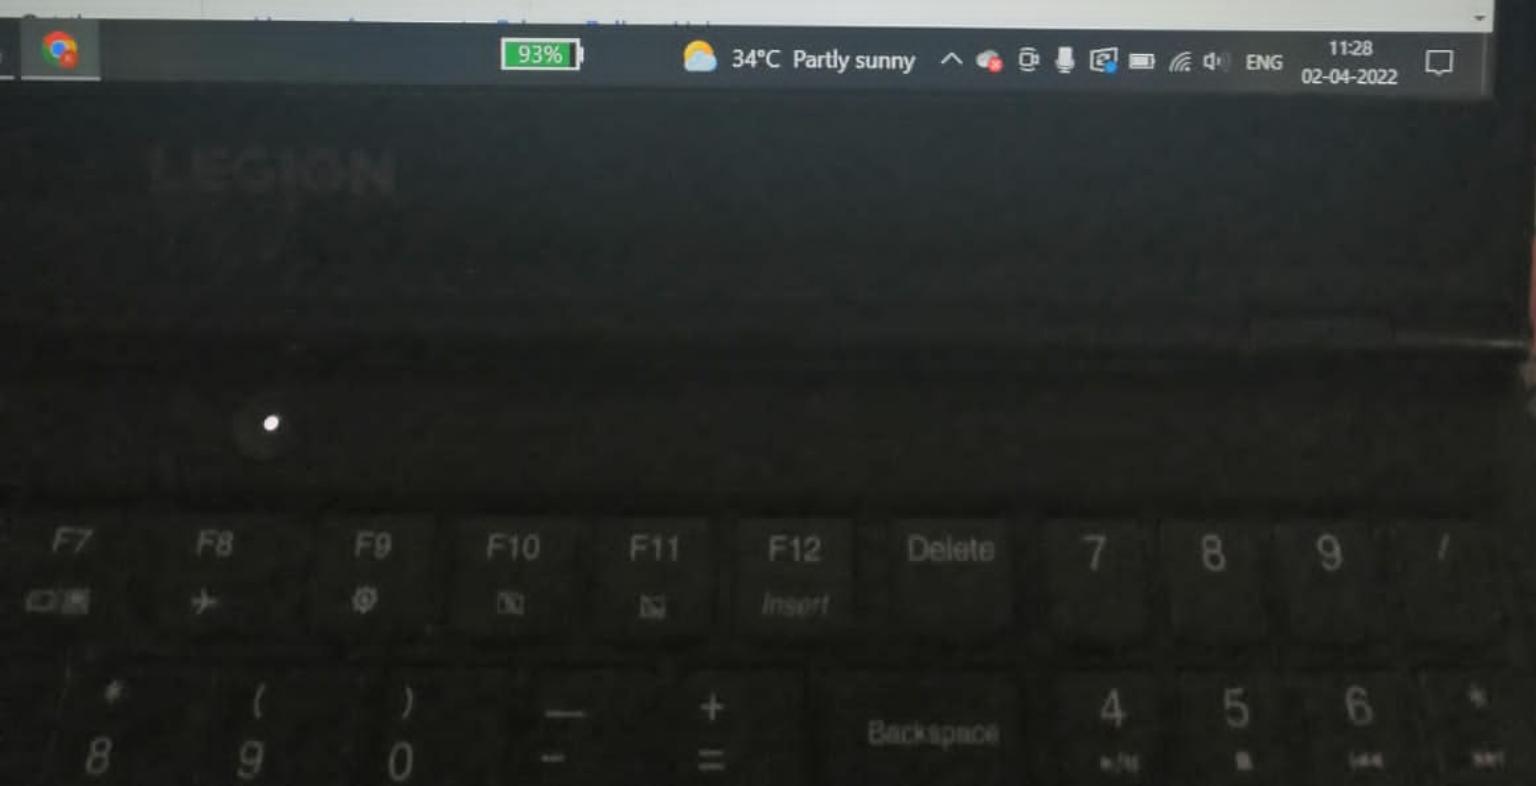

Peripio Course Test: Deploying X Mail - keerthana1 - Outlook X + mphasis.peripio.com/courses/93beadb1-14c0-11e7-92d9-0242c0a80b07/assessment/e9ce5160-6db5-11e7-b71a-d6770bc9ef46/challenge/9b1em...

YouTube Maps Gmail Discussion About S... Java - OneDrive Manage your Mpha...

Mphasis The Next Applied Library Search... 

Deploying & Using Jasmine

Question 7 of 12

Question: Suppose you are working with "toBeCloseTo" Jasmine matchers. Which of the following will pass the test?

Result: Partially correct. The correct answers are indicated.


expect(2.00).toBeCloseTo(2.01, 2);

expect(2.00).toBeCloseTo(2.01, 1);
✓ Correct answer.

expect(3.00).toBeCloseTo(3.01);
✗ Incorrect answer.

expect(3.000).toBeCloseTo(3.001);
✓ Correct answer.

[Save and Exit](#) [Next Question](#)

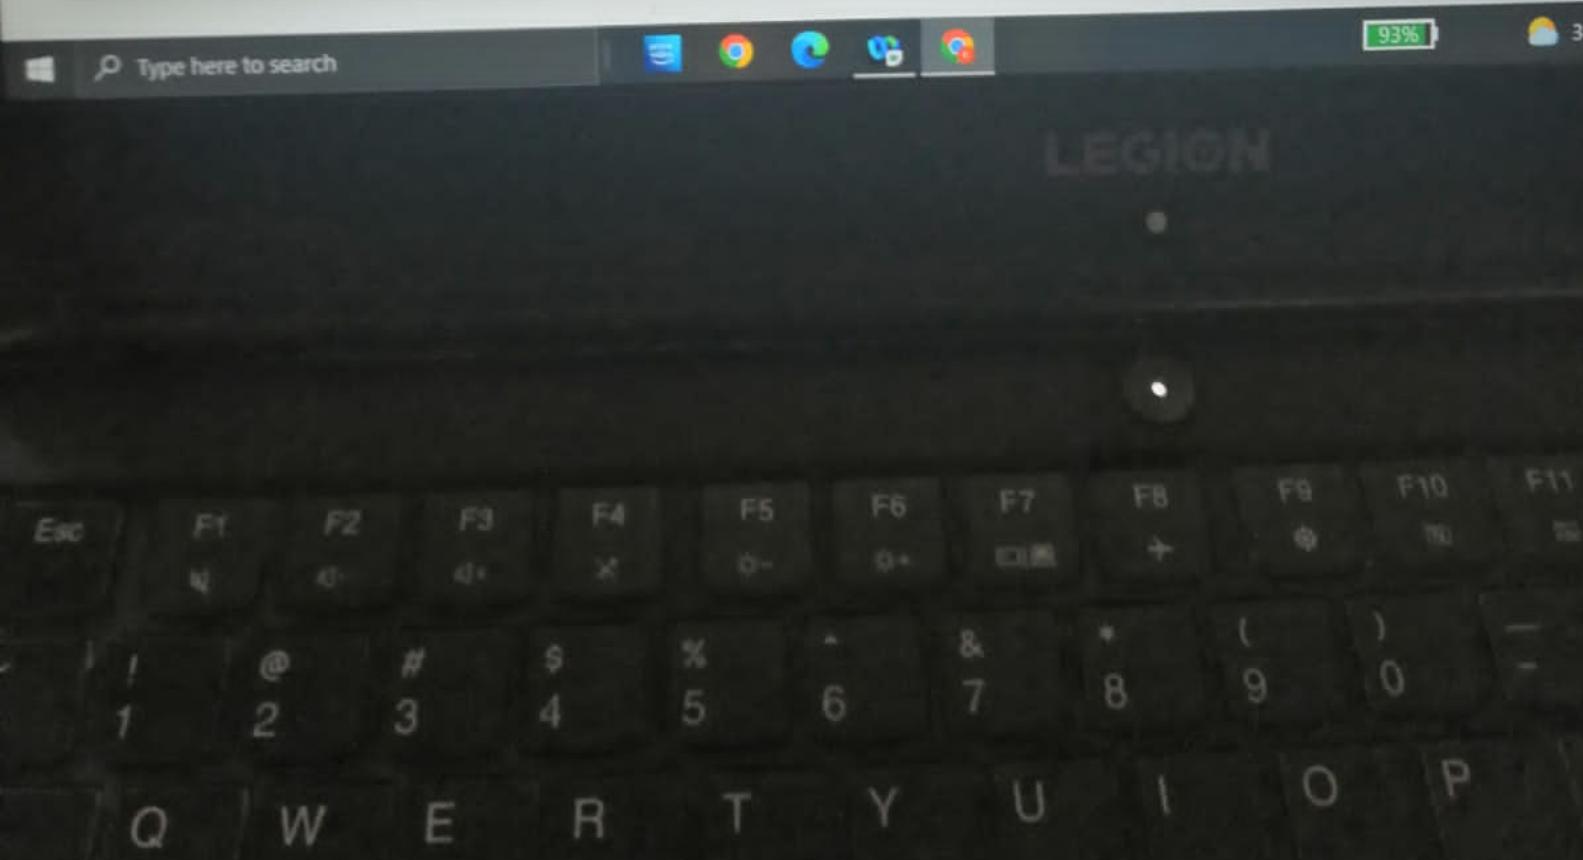

Deploying & Using Jasmine

Question 3 of 12

Question: Which element of the Jasmine architecture contains all of the tests?

Result: Correct. Great job!

SpecRunner.html

lib

spec

✓ *Correct answer.*

src

[Save and Exit](#)

[Next Question](#)

[Get the app](#)

[License Agree...](#)



Type here to search



Esc

F1

F2

F3

F4

F5

F6

F7

F8

↑

↓

←

→

Shift

Ctrl

Alt

Fn

Percipio Course Test: Deploying > Mail - keerthana I - Outlook > +

YouTube Maps Gmail Discussion About S... Java - OneDrive Manage your Mpha...

Mphasis The Next Applied Library Search...

Deploying & Using Jasmine

Question 8 of 12

Question: You need to create "toBeCloseTo" Jasmine test matcher code that will expect 2.2334 to be close to 2.2335 with a tolerance of 3. What code should be used to ensure that when you run a test it will pass?

Result: Correct. Great job!


expect(2.2334).toBeCloseTo(2.2335);


expect(2.2334).toBeCloseTo(2.2335, 4);

expect(2.2334).toBeCloseTo(2.2335, 3);
✓ *Correct answer.*

expect(2.2334).toBeCloseTo(2.233, 33);

[Save and Exit](#) [Next Question](#)

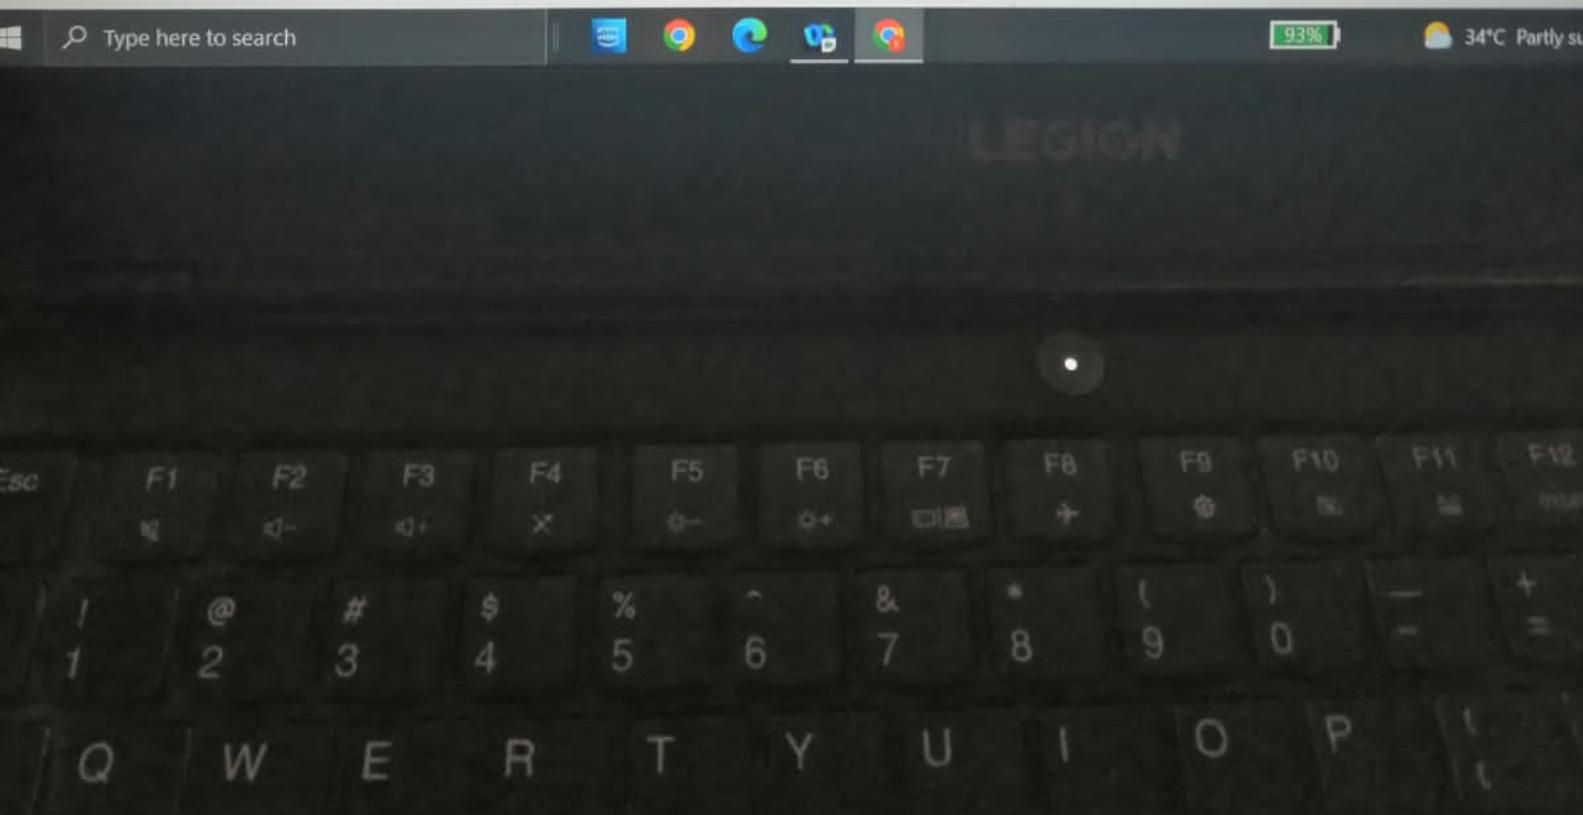



Targets may be reused.

Result: Partially correct. The correct answers are indicated.

Options

describe

 A B C D

✗ Incorrect answers. A, D are the correct answers.

it

 A B C D

✗ Incorrect answers. B, C are the correct answers.

[Save and Exit](#)

[Next Question](#)



Type here to search



Esc

F1

F2

F3

F4

F5

F6

F7

Q E R T Y U I O P

A S D F G H J K L

Z X C V B N M

Percipio Course Test: Deploying > Mail - keerthana I - Outlook

mphasis.percipio.com/courses/936eadb1-14c0-11e7-92d9-0242e0a80b07/assessment/e9ce5160-6d85-11e7-b71a-d6770bc9e146

YouTube Maps Gmail Discussion About S... java - OneDrive Manage your Mpha...

Mphasis The Next Applied Library Search...

Jasmine 2.3.4

There are only a total of four specs

Two specs have succeeded
Incorrect answer.

Four specs have succeeded
Correct answer.

Two tests have failed
Correct answer.

Four specs have failed

There are a total of six specs
Correct answer.

Save and Exit Next Question



Deploying & Using Jasmine

Question 5 of 12


Question: You create a new spec to test a new source file that was created. You want to run a test. Which file will you need to open to execute the test?

Result: Incorrect. The correct answer is indicated.

- boot.js
- PlayerSpec.js
- jasmine-html.js
✗ Incorrect answer.
- SpecRunner.html
✓ Correct answer.
- jasmine.js

Save and Exit

Next Question



LEGION



Percipio Course Test: Deploying < Mail - keerthana I - Outlook mphasis.percipio.com/courses/936eadb1-14c0-11e7-92d9-0242c0a80b07/assessment/e9ce5160-6d85-11e7-b71a-d6770bc9ef46/ctg

YouTube Maps Gmail Discussion About S... java - OneDrive Manage your Mpha...

Mphasis The Next Applied Library Search...

Deploying & Using Jasmine

Question 9 of 12

Question: Suppose a custom matcher has been created. The customMatcher is using a toBeCloseEnough compare: function is returned and the object has a key compare value function.

What are the two arguments that the compare function takes?

Result: Correct. Great job!

Pass and message

The actual value ✓ *Correct answer.*

What is expected ✓ *Correct answer.*

The utility

Save and Exit **Next Question**



Type here to search



93%

LEGION

Esc F1 F2 F3 F4 F5 F6 F7 F8 F9 F10
! @ # \$ % ^ & * () ~

1 2 3 4 5 6 7 8 9 0

Tab Q W E R T Y U I O P

Targets may be reused.

Instruction: For each option, select all the answer choices that apply.

Options

describe

A B C D

Answer Choices

- A: A function parameter that defines the contents of the test suite
- B: A string parameter that describes the spec
- C: A function parameter that defines the test
- D: A string parameter which contains the name of the test suite

it

A B C D

[Save and Exit](#)

[Submit Answer](#)


94%

34°C Partly sunny

Type here to search



ENG

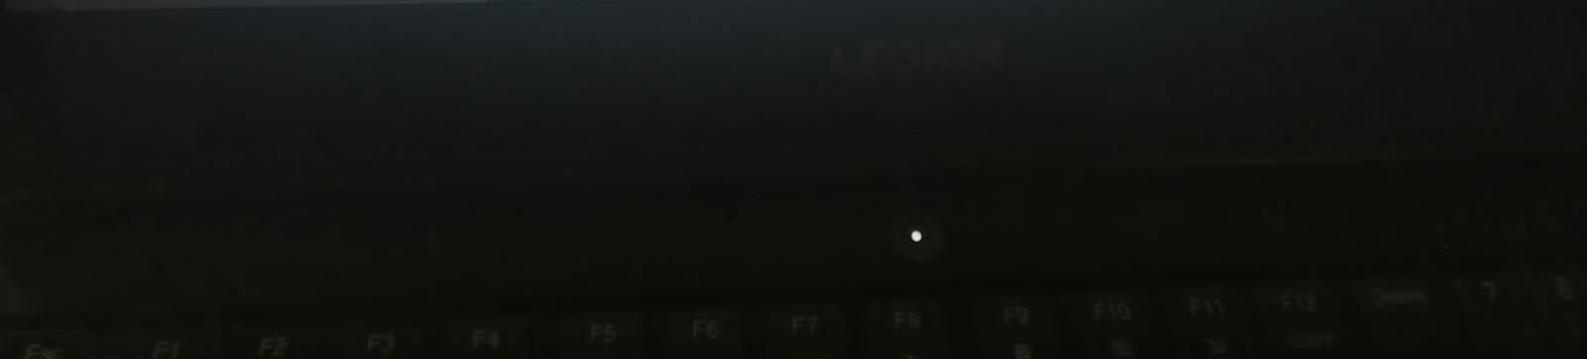

Deploying & Using Jasmine

Question 1 of 12

Question: Which are attributes of Jasmine?

Result: Partially correct. The correct answers are indicated.

Used to create complex JavaScript projects and programs

Provides a testing framework for VBscript code

Incorrect answer.

Adheres to Behavior-Driven Development principles

Correct answer.

Can be integrated into node.js

Correct answer.

Provides a testing framework for JavaScript code

Correct answer.

[Save and Exit](#)

[Next Question](#)

Type here to search



LEGION

Esc

F1

F2

F3

F4

F5

F6

F7

F8

F9

↶

↶-

↶+

↷

↷-

↷+

Question No: 01

Multiple Choice (There may be more than 1 correct answer)

QuestionId: 49059

Where should we call the detectChanges() method if we want to ensure that an initial data binding has occurred prior to a test being executed?

Options

- At the end of an individual test
- In a ~~beforeEach()~~ block
- Anywhere within an individual test
- Within an individual test before any expectations

01	02	03	04	05
06	07	08	09	10
11	12	13	14	15
16	17	18	19	20
21	22	23	24	25

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: a3026

Choose the user/s who participate in ATDD

Options

- Developers
- Developers, Customer, QAs
- Customer
- QAs

4 05
9 10
15
20
25

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: 9b061

What is the correct way to trigger a "click" event on a button when testing an Angular component?

Options

- button.trigger('click');
- button.triggerEventHandler('click',null); 
- button.click();
- button.trigger('click',null);

03	04	05
08	09	10
13	14	15
18	19	20
23	24	25

Question No: 05

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: 14057

What is the correct approach to create a testing module using Angular's TestBed utility?

Options

- ~~testBed.configureTestingModule()~~
- Testbed.defineTests()
- TestBed.configureTestingModule()
- Testbed.createTestingModule()

10
15
20
25

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: 8c052

Which method can be used to create a Jasmine spy?

Options

- getSpy()
- getSpyObj()
- createSpyObj()
- CreateSpy()

05
10
15
20
25

QuestionId: 22016

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: 22016

You can disable tests without commenting them out by just pre-pending _____ to the describe / it functions

Options

- a
- x
- #
- @

03	04	05
08	09	10
13	14	15
18	19	20
23	24	25

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: d5075

_____ keyword is used to indicate that the function is asynchronous

Options

- defer
- resolve
- ~~asynchronous~~
- awaiter

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: 4f067

When mocking a dependency, a dummy class is provided with many of the same methods as the original. These methods do not provide functionality, but they may just return predictable values that we can use for testing purposes.
This dummy class is called as _____

Options

- Mock
- custom class
- dependency class
- describe()

07	08	09	10
12	13	14	15
17	18	19	20
22	23	24	25

Multiple Choice (Select 1 out of 4 options, for the question below)

QuestionId: aa002

_____ is the default test runner for applications created with the Angular CLI.

Options

- Jasmine
- Karma
- Cypress
- Jest

	09	10
	14	15
	19	20
	24	25

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: eb064

Which of the following matcher function is used to test greater than condition ?

Options

- expect(number).Greater(number);
- expect(number).GreaterThan(number);
- expect(number).toBeGreaterThan(number);
- expect(number).IsGreater(number);

07	08	09	10
12	13	14	15
17	18	19	20
22	23	24	25

Multiple Choice (Select 1 out of 4 options, for the question below.)

QuestionId: 9d019

_____ is used for testing all the functionality of the project

Options

- Unit Testing
- Integration test
- End-to-end testing
- application testing

06	07	08	09	10
11	12	13	14	15
16	17	18	19	20
21	22	23	24	25

Multiple Choice (There may be more than 1 correct answer)

QuestionId: ad009

Choose the predefined matchers in the following

Options

- toBe()
- toBeTruthy()
- toBeNumber()
- toBeString()
- toBeAlways()

QuestionId: c5024

_____ is a development technique that focuses more on the implementation of a feature.

Options

- TDD
- BDD
- ATDD
- RTDD

2	03	04	05
7	08	09	10
2	13	14	15
7	18	19	20
2	23	24	25

Multiple Choice (Select 1 out of 5 options, for the question below.)

QuestionId: 58014

_____ is the main package for testing in Angular

Options

- @angular/core/testing
- @angular/testing
- @angular/common/testing
- @angular/testing/core
- @angular/testing/common

QuestionId: 5a062

What is the correct approach to configure an Angular testing module to test a custom directive named "MyDirective" that is used as a child component of "MyComponent"?

Options

- declarations: [MyDirective, MyComponent]
- testBed: [MyDirective, MyComponent]
- providers: [MyDirective, MyComponent]
- schemas: [MyDirective, MyComponent]

QuestionId: 49059

Where should we call the detectChanges() method if we want to ensure that an initial data binding has occurred?

Options

- At the end of an individual test
- In a beforeEach() block
- Anywhere within an individual test
- Within an individual test before any expectations

QuestionId: 5a062

What is the correct approach to configure an Angular testing module to test a component directive named "MyComponent"?

Options

- declarations: [MyDirective, MyComponent]
- TestBed: [MyDirective, MyComponent]
- providers: [MyDirective, MyComponent]
- schemas: [MyDirective, MyComponent]

QuestionId: a5015

_____ configures and initializes Angular environment for unit testing

Options

- Test Suite
- Test Specs
- Test Bed
- Test function

QuestionId: 99053

Which are valid ways to inject a service class "MyService" into a CLI based unit

Options

new MyService()

TestBed.get(MyService)

inject([MyService], (service:MyService)=>{})

providers: [MyService]

QuestionId: 22016

You can disable tests without commenting them out by just pre-pending _____

describe / it fur

Options

- a
- x
- #
- @

QuestionId: 02036

Choose the characteristics of Jasmine

Options

- Provides a testing framework for JavaScript code
- Provides a testing framework for VBScript code
- Used to create complex JavaScript projects and programs
- Adheres to Behavior-Driven Development principles
- Can be integrated with NodeJS

QuestionId: 51047

_____ is the global test configuration file in Angular Application

Options

- angular.json
- environment.ts
- test.ts
- karma.json

QuestionId: 2a031

In case of _____, you can test parts of the project without waiting for others to be completed.

Options

- Integration Testing
- Unit Testing
- End-to-end testing
- Acceptance Testing

QuestionId: 9d019

_____ is used for testing all the functionality of the project

Options

- Unit Testing
- Integration test
- End-to-end testing
- application testing

QuestionId: e1020

_____ is software development approach in which test cases are developed to specify and validate what

Options

- BDD
- TDD
- Monolith
- MicroService

QuestionId: dc068

_____ matcher is used in Jasmine to check whether the result is equal to true or false.

Options

- expect(number).toBe();
- expect(number).toBeTruthy();
- expect(number).isTruthy();
- expect(number).isTrue();

QuestionId: B1034

Choose the valid statements w.r.t System testing

Options

- It checks system functionalities and features
- It's executed after Integration Testing
- It's executed once System Testing is completed
- Only Automation can be performed for System Testing

Choose the valid statements w.r.t End-to-End testing

Options

- It checks the complete end-to-end process flow
- It checks system functionalities and features
- Validates the software system as well as interconnected sub-systems
- Validates just the software system as per the requirements specifications

QUESTION

a collection of individual Test Specs.

Options

- Test Mock
- Test Suite
- Test Stubs
- Test Entry

test plan or test suit

Multiple Choice

QuestionId: fa063

Which of the following matcher function is used to determine if the given variable is NAN

Options

- expect(number).NaN();
- expect(number).isNaN();
- expect(number).toBeNaN();
- expect(number).BeNaN();

QuestionId: eb064

Which of the following matcher function is used to test greater than condition ?

Options

- expect(number).Greater(number);
- expect(number).GreaterThan(number);
- expect(number).toBeGreaterThan(number);
- expect(number).IsGreater(number);

Question 10. Ques 12

_____ function is called before each test specification is run.

Options

- beforeAll()
- afterAll()
- beforeEach()
- afterEach()

QuestionId: eb066

Jasmine will only run specific suite of tests instead of all tests in the Application if you use _____.

Options

- `xdescribe()`
- `fdescribe()`
- `rdescribe()`
- `idecribe()`

Question No: 24

Multiple Choice (Select 1 out of 4 options, for the question)

QuestionId: ce007

function defines an individual Test Specs

Options

- it()
- describe()
- expect()
- matcher ()