

EXPERIMENT – 3

AIM

To develop a Student Name Manager using JavaScript arrays and functions to add, display, search and manage student names.

DESCRIPTION

The experiment demonstrates the use of **JavaScript arrays and functions** to manage student names. The application allows the user to enter student names, store them in an array and perform required operations such as displaying and searching names.

PROGRAM

index.html

```
<!DOCTYPE html>

<html>

<head>

<meta charset="UTF-8">

<title>Student Name Manager</title>

<link rel="stylesheet" href="style.css">

</head>

<body>

<div class="container">

<h1>Student Name Manager</h1>

<input type="text" id="studentName" placeholder="Enter student name">

<button onclick="addStudent()">Add Student</button>

<h3>Total Students: <span id="count">0</span></h3>

<ul id="studentList"></ul>

</div>

<script src="script.js"></script>

</body>

</html>
```

style.css

```
body {  
    margin: 0;  
    padding: 0;  
    font-family: Arial, Helvetica, sans-serif;  
    background: #f4f7fc;  
    display: flex;  
    justify-content: center;  
    align-items: center;  
    height: 100vh;  
}  
  
.container {  
    background: #ffffff;  
    padding: 30px;  
    width: 400px;  
    border-radius: 12px;  
    box-shadow: 0 4px 12px rgba(0, 0, 0, 0.15);  
    text-align: center;  
}  
  
h1 {  
    color: #333;  
    margin-bottom: 20px;  
}  
  
input {  
    width: 70%;  
    padding: 10px;  
    border: 2px solid #4CAF50;
```

```
border-radius: 6px;
outline: none;
font-size: 16px;
}
button {
padding: 10px 15px;
margin-left: 5px;
border: none;
border-radius: 6px;
background: #4CAF50;
color: white;
cursor: pointer;
font-size: 15px;
transition: 0.3s;
}
button:hover {
background: #388E3C;
}
h3 {
margin-top: 20px;
color: #444;
}
ul {
list-style: none;
padding: 0;
margin-top: 20px;
}
```

```

li {
    display: flex;
    justify-content: space-between;
    align-items: center;
    background: #f9f9f9;
    padding: 10px;
    margin-bottom: 10px;
    border-radius: 6px;
    border-left: 5px solid #4CAF50;
}
.delete {
    background: #e53935;
    padding: 6px 12px;
}
.delete:hover {
    background: #c62828;
}

```

script.js

```

let students=['bob'];
function addStudent(){
    const input=document.getElementById("studentName");
    const name=input.value.trim();
    if(name===""){
        alert("Enter student name");
        return;
    }
    students.push(name);
}

```

```

input.value="";
displayStudents();
}
function displayStudents(){
const list=document.getElementById("studentList");
list.innerHTML="";
students.forEach((student,index)=>{
  list.innerHTML+=
` <li>
    ${index+1}. ${student}
    <button class="delete" onclick="deleteStudent(${index})">Delete</button>
  </li>`;
});
document.getElementById("count").textContent=students.length;
}
function deleteStudent(index){
students.splice(index,1);
displayStudents();
}
displayStudents();

```

DETAILS ABOUT PROGRAM

Folder structure:

FullStack/

└─ Week-3/

│ └─ index.html

│ └─ style.css

└─ script.js


The program was executed in a **web browser** using index.html.

Execution steps:

1. Opened the **Student-Name-Manager** folder in VS Code and opened index.html.
2. Opened the HTML file in a web browser.
3. Entered student names and checked whether they were added, displayed and managed correctly.

OUTPUT

The **Student Name Manager** was successfully displayed and executed in the browser. Student names were added and managed using JavaScript arrays and functions.

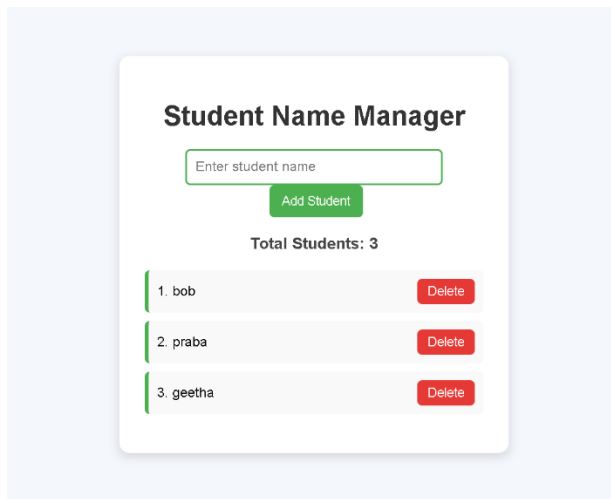

The screenshot shows a web application titled "Student Name Manager". It features a text input field with the placeholder "Enter student name" and a green "Add Student" button. Below the input, it displays "Total Students: 3". A list of three students is shown, each with a red "Delete" button:

Student ID	Student Name	Action
1.	bob	Delete
2.	praba	Delete
3.	geetha	Delete