

---

## FUNK ME STRING

**- strtolower ->** teksti me vogla

p.sh strtolower(\$name) e \$name='ShpE'; pra lexoje  
variablen name merri kejt me vogla

**- str\_word\_count ->** sa fjale i ka teksti

```
$string='this is a string';  
$string_count=str_word_count($string);//sa eshte nr  
i fjaleve brenda 1 stringu REZ:4  
echo $string_count;
```

**- strlen ->** gjatësia e tekstit

```
//perdoret gjat validimit te formave  
$string='this is a string';  
echo strlen($string);//REZ :16-gjatsine e stringut
```

**- str\_shuffle ->** perzi tekstin

```
$string='this is a string';  
$string_count=str_shuffle($string);  
echo $string_count;//e ben perzirjen random te stringut
```

**- strrev ->** me kthe mbrapa tekstin

```
$string='this is a string';  
echo strrev($string);//e kthen mbrapa stringun
```

**- similar\_text ->** ngjashmeria e tekstit ne perqindje me vlere prej 0-100

```
$string1='this is a string';  
$string2='this is a string about php';  
similar_text($string1,$string2,$a);//sa % kan ngjashmeri  
tekstet brenda variablave edhe qajo perqindje ruhet tek argumenti  
i tret phiii legjend po shkruaj pa e kshyr tasteren great.  
echo $a;
```

**-str\_replace->** me zëvendësoj pjesë të stringut me pjesë tjeter  
\$str1='The cate is than better dog';  
\$str2='bird';  
\$str3=str\_replace('cate',\$str2,\$str1);//tek variabla \$str1 fjala  
cate zëvendësohet me variablen e dytë \$str2 rrëdhitja e argumenteve  
në funksion bëhet siq është paraqitur.  
echo \$str3;

**-substr\_replace->** me zëvendësoj tekstin brenda stringut  
\$var1='hello world per ty sabit';  
\$var2='shpend';  
\$var3=substr\_replace(\$var1,\$var2,6,5);//argumenti i par është ku don me bë ndërrimin në  
cilin string, i dyti me qfar stringu don me bë ndërrimin, i treti prej cilit vend për prej ciles  
pozit don me fillu ndërrimi edhe i katërti sa karaktere të argumentit të par për ket  
rast \$var1 don me zëvendësoj për 5 karaktere që i bëjnë veq fjalen world  
echo \$var3;//REZ: hello shpend per ty sabit.

**-strpos->** me gjet se në cilën pozitë fillon teksti i kërkuar brenda 1 stringu  
\$find='is';  
\$find\_length=strlen(\$find);  
\$string='this is a boy';  
echo strpos(\$string,\$find,3);//argumenti i 1  
//është në cilin string me bë kerkimin, argumenti  
//i dytë është qka me kerku, edhe argumenti  
//tretë është prej ciles pozitë më fillu kerkimin

**-substr->**  
substr(string, start);  
//argumenti i parë është në cilin string mirret teksti në cilën variabël ka me vepru  
//funksioni  
//argumenti i dytë tregon prej ciles pozite (indeks) ka më marrë teksti  
\$stringu='blla-BLLA'  
substr(\$stringu, 5);    rez:    BLLA

```
ucfirst($n1);
```

```
$n1=blla;
```

```
nese e shtypum ucfirst($n1); fitojm rez: Blla
```

pra ky funksion e bon vetem shkronjen e par te madhe pra b ne B. tjerat si interesojn i len qysh jon. mpuqq kiss kiss bye bye.

---

## **FOREACH**

```
$food=array('Fast Food SABITI'=>
```

```
array('pizza','burek','pesqe'),
```

```
'Gjelltore TE NAZI'=>
```

```
array('pasul','gullash'));
```

```
foreach($food as $element=>$inner_array)
```

```
{
```

```
    echo '<strong>'.$element.'</strong><br>';
```

```
    foreach($inner_array as $item )
```

```
        echo $item.'<br>';
```

```
}
```

Foreach perdoret gati njejt si nje unaz for por kur nuk e dim se sa ka mu kon kushti p.s i<?

Nuk e dim deri ku ka me shku unza per sa antar ka mu perserit ajo unaz

p.s nese jem tu regjistru emra ne nje fajll edhe I thojm qe tan kohen mi lexu ata emra e perdorim foreach.

---

## **INCLUDE**

```
//Pse bash mu perdor kjo forja, osht qe ne qdo faqe qe bohet me  
permbajt header, footerin, aside etj etj te njejta edhe veq per-  
mbajtjen e bodyit me ndrru that'it point besoj qe e kom shkru  
mir qat fjalen that'it po edhe qe se kom shkru kujt pi han hyhy
```

P.S EMRIN E FAJLLIT QE PO DON ME PERFSHI

```
INCLUDE 'PERFSHIJE.PHP';
```

```
<?php //first.php

    include 'header.inc.php';
    echo $a;

?>
```

---

```
<?php //anotherPage.php
    include 'header.inc.php';
    echo $b;

?>
```

---

```
        // header.inc.php
<h1>Shpendi's Website</h1>
<?php
    $a='string';
    $b=10;

?>
```

---

## **TIME STAMPS**

```
$time =time();
$actual_time= date('d m Y-H:i:s',time());/*argumenti
i par eshte per oren nese osht me shkronj te
vogel e tregon oren prej 00-11 e nese osht me
shkronje te madhe e tregon prej 00-24
argumenti i dyt minutat edhe i treti secondat
mes shkronjav H:i:s mujm me vendos qfardo kara-
ktere qe dojm p.s H-i-s
parametrat D m Y e tregojn ditën mujin dhe vitin*/
echo $actual_time;
```

---

### **menyra tjeter:**

```
$time=time()+135;
echo time().'<br>;'
```

```
echo $time;
```

---

**-strtotime->** me ndyshu kohën  
strtotime('-1 week 2 hours 3 minutes 30 seconds');  
// me - shkon mbrapa në kohë me + para.

```
$time = time();  
$time_now = date('d M Y--H:i:s', $time);  
$time_modified = date('d M Y--H:i:s',  
    strtotime('-1 week 2 hours 3 minutes 30 seconds'));  
echo 'time now : ' . $time_now . '<br>' . 'time modified : ' . $time_modified;
```

---

## Random Numbers

\$rand = rand(0,20); // për argumente I par tregon prej kujt mja fillu me i perserit nr e deri ku, deri me 10 shifra po shkon sdi ma shum qe bohet fati I ti.

## \$\_SERVER Variables

---

**prova.php**

```
<?php  
include 'header.inc.php';  
if(isset($_POST['submit']))  
{  
    echo 'proces 1';  
}  
?>
```

---

**header.inc.php**

```
<?php
```

```
$var=$_SERVER['SCRIPT_NAME'];
?>
<form action="<?php echo $var;?>" method="POST">
    <input type="submit" name="submit" value="submit">
</form>
```

//pra forja e qasaj osht qe me ndryshu ne menyre dinamike shtegun e fajllit kushtimisht  
Nese kish me kon p.s prova.php kur ishem kon ne anotherpage.php edhe kishem kliku mbi  
butonin submit action="prova.php" edhe automatikisht ish llodu faqja e prova.php.

---

```
anotherpage.php
<?php
include 'header.inc.php';
if(isset($_POST['submit']))
{
    echo 'proces 2';
}
?>
```

---

<input type="submit" /> defines a submit button.

A submit button is used to send form data to a server. The data is sent to the page specified in the form's action attribute. The file defined in the action attribute usually does something with the received input:

---

## header();

<?php ob\_start();?>//I jep perparsi per mu ekzekutu kodit ne php dhe nuk ekzekutohet fare kodi html

<h1>My web page</h1>

```
<?php
$redirect=true;
if($redirect==true)
{
    header('Location:http://google.co.uk');
    //header te drejton tek linku
}
ob_end_flush();//nese ndodh qe tmos mund te shkojm tek linku ather ekzekutohet pjesa e
kodit html pra nese ndo ku I ndryshon vlera $redirect=true; I behet false.
?>
```

---

## \$\_SERVER['REMOTE\_ADDR']

```
<?php
//include conf.inc.php;
$ip_address=$_SERVER['REMOTE_ADDR'];//e merr IP addressen qe I qaset.
$ip_bllocked=array('127.0.0.1','100.100.100.100');
foreach ($ip_bllocked as $ip ) {
    if ($ip==$ip_address) {
        die('Your IP address has ben blocked');
    }
}
?>
<h1>wellcome</h1>
```

---

## Mos me leju me shtyp skripta

```
<?php
if(isset($_GET['text']))
{
    $var=htmlentities($_GET["text"]);
    if(!empty($var))
```

```
{
    echo $var;
}

}
?>
<form action="index.php" method="GET">
    <input type="text" name="text">
    <input type="submit" name="submit" value="Submit">
</form>
```

---

### Funksioni Define

```
define("Cmimi_PC",750);
define("Cmimi_Printer", 125.5);
define("Cmimi_HD", 75.05);
//define("Cmimi_PC",25); //nuk mund të ndërrohet vlera e konstantës Cmimi_PC pra variabla
//Cmimi_PC eshte variable konstante. Si ne c++ const int a=5;
echo "PC ". Cmimi_PC."<br />";
echo "Printer ". Cmimi_Printer."<br />";
echo "HD ". Cmimi_HD."<br />";
echo Cmimi_PC+Cmimi_HD;//thjesht mi perdor variablat pa e perdor shenjen e $(dollarit).
//edhe kto variabla kan vlera kontante.
/*Cmimi_PC=Cmimi_PC+Cmimi_HD;
echo 'qmimi pc'.Cmimi_PC;
```

---

### SESSION

Fajlli 1: set.php

```
<?php
session_start();

$_SESSION['username']='alex';
$_SESSION['age']=21;
?>
```

---

Fajlli 2: view.php

```
<?php
```



```
session_start();
    echo 'wellcome '.$_SESSION['username'].'you are '.$_SESSION['age'];
?>
```

---

Fajlli 3: unset.php

```
<?php
session_start();
//unset($_SESSION['username']);//e ndalon vetem ket variabel te sesionit.
session_destroy();
//e ndalon ter sesionin.
?>
```

---

## COOKIE

Fajlli 1: set.php

```
<?php /*zakonisht perdoret kur don mja caktu kohen deri sa mu kon valide naj fage ose diqka
te ngjashme */
setcookie('username','alex',time()+30);
//argumenti i par osht emri i cookie-t i dyti qfar permбан edhe i 3 kohen deri sa ka me vlejt
//cookie.
```

```
setcookie('username','alex',time()-30); //kur dojm me ndalu cookie-n ktu nuk osht e nevojshme
//sikurse tek sesioni per me ndalu.
?>
```

---

Fajlli 2: view.php

```
<?php
echo $_COOKIE['username'];
?>
```

---

## Shkrimi Leximi & Append mbushja

```
$handle=fopen('names.txt','w');//ky funksion krijon fajllin
```

//argumenti i par e tregon emrin e fajllit, i dyti tregon se a ka mu shkru, apo ka mu lexu ne at fajll apoka mu mbush append pra tek argumenti I dyt vendoset wetem shkronja e par (W,R,A).

```
fwrite($handle,'Alex'."\n");
```

```
fwrite($handle,'Billy');//me ket funk shkrujm ne fajll
```

//argumenti i par ne cilin fajll edhe i dyti qka kem me shkru ne at fajll

```
fclose($handle);//e mbyll koneksionin.
```

```
echo 'written.';
```

p.s

```
<form action='file.php' method='POST' name='frm'>
```

```
Name:<br><input type='text' name='txt'><br>
```

```
<input type='submit' name='submit'>
```

```
</form>
```

```
<?php
```

```
if (isset($_POST['txt'])) {
```

```
    $a=$_POST['txt'];
```

```
    if (!empty($a)) {
```

```
        $b=fopen('names.txt','a');
```

```
        fwrite($b,$a."\n");
```

```
        echo 'add';
```

```
        fclose($b);
```

```
    }
```

```
    else{
```

```
        echo 'koneksioni u mbyll';
```

```
    }
```

```
}
```

```
?>
```

### **LEXIMI**

```
<form action='file.php' method='POST' name='frm'>
```

```
Name:<br><input type='text' name='txt'><br>
```

```
<input type='submit' name='submit'>
```

```
</form>
```

```
<?php
```

```
if (isset($_POST['txt'])) {
```

```
    $a=$_POST['txt'];
```

```
    if (!empty($a)) {
```

```
        $b=fopen('names.txt','a');
```

```
        fwrite($b,$a."\n");
```

```

        fclose($b);

        $d=1;
        echo 'Current names in file: ';
        $c=file('names.txt');
        $c_count=count($c);//me ket funk e shohim qe te dhenat ne fajll ruhen si array
si antar te vektorit
        foreach ($c as $fname) {
            echo trim($fname);
            if($d<$c_count){
                echo ', ';
                $d++;
            }
        }
    }
    else{
        echo 'koneksioni u mbyll';
    }
}

?>

```

### Menyra tjeter qysh me lexu prej fajllit

```

<?php
$a='names.txt';
$handle=fopen($a,'r');
echo fread($handle,filesize($a));//argumenti i dyt thot per ter gjatsin e fajllit mUNET MU KON P.S
//100 qe i merr 100 bitat e par te fajllit
?>

```

---

```

<?php
$filename='filetorename.txt';
if (file_exists($filename)) { //funk qe kerkon nese egziston fajlli $filename
    echo 'File already exist.';
}
else
{
    $handle=fopen($filename, 'a');
    fwrite($handle,'Nothing. ');
    fclose($handle);
}

```

```
}  
?>
```

---

```
<?php  
$filename='filedelete.txt';  
if (unlink($filename)) {//funk qe ben fshirjen e fajllit  
    echo 'Faile <strong>'.$filename.'</strong> has been deleted';  
} else {  
    echo 'File cannot be deleted';  
}  
?>
```

---

```
<?php  
$filename='filetorename.txt';  
rename($filename,'fajlliri.php');  
//funksioni per mja ndrru emrin si dhe formatin e fajllit.  
?>
```

---

### Kontrolla e Re File

```
<?php  
$name=$_FILES['pldh']['name'];//tregon emrin e fajllit  
$size=$_FILES['pldh']['size'];//madhsine  
$type=$_FILES['pldh']['type'];//tipin  
$temporary_name=$_FILES['pldh']['tmp_name'];//direktoriumin e fajllit  
?>
```

} ska bo te une.

```
<form action="up.php" method="POST" enctype="multipart/form-data">  
    <input type="file" name="pldh"><br><br>  
    <input type="submit" value="submit">  
</form>//bon po fajet I ka pas xampi kejt o ok me ket Cod *shenim I me vonshem*
```

---

## KLASAT ne PHP

```
<?php  
class clsBlla {
```

```

private $a;
public $b;
public function __construct(/* konstruktori I kl. */ ){
    $this->a=3;
    $this->b=4;
}
function blla(){
    echo $this->b;
    echo '<br>'.$this->a;
}
}
// main (); programi hahha si ne c++
$istancaCls /*istanca e kl.*/ =new clsBlla();
$istancaCls->blla();
echo '<br>'. $istancaCls->b;
//echo '<br>'. $istancaCls->a;
//Fatal error: Cannot access private property clsBlla::$a in
C:\xampp\htdocs\AutoTrendi\prova\pointerat.php on line 50 PO SHIHET QKA OSHT HESAPI.
?>

```

## ***Inheritance***

Once you have written a class, you can derive subclasses from it. This can save lots of painstaking code rewriting: you can take a class similar to the one you need to write, extend it to a subclass, and just modify the parts that are different. This is achieved using the extendsoperator.

In Example 5-24, the class Subscriberis declared a subclass of Userby means of the extendsoperator.

Example 5-24. Inheriting and extending a class

```

<?php
$object = new Subscriber;
$object->name = "Fred";
$object->password = "pword";
$object->phone = "012 345 6789";
$object->email = "fred@bloggs.com";
$object->display();
class User
{
    public $name, $password;

```

```

function save_user()
{
    echo "Save User code goes here";
}
}

class Subscriber extends User
{
    public $phone, $email;
    function display()
    {
        echo "Name: " . $this->name . "<br />";
        echo "Pass: " . $this->password . "<br />";
        echo "Phone: " . $this->phone . "<br />";
        echo "Email: " . $this->email;
    }
}
?>

```

The original Userclass has two properties, \$nameand \$password, and a method to save the current user to the database. Subscriberextends this class by adding an additional two properties, \$phoneand \$email, and includes a method of displaying the properties of the current object using the variable \$this, which refers to the current values of the object being accessed. The output from this code is:

Name: Fred

Pass: pword

Phone: 012 345 6789

Email: [fred@bloggs.com](mailto:fred@bloggs.com)

### MORE MAGIC METHODS

So far we have come across the magic methods \_\_construct, \_\_destruct, and \_\_toString, and have discussed them in detail. The remaining magic methods are \_\_autoload, \_\_call, \_\_clone, \_\_get, \_\_set, \_\_sleep, \_\_wakeup, \_\_unset, and \_\_isset.


As you might expect, they only make sense in the context of object-oriented programming (OOP).

---

## *Passing by Reference*

In PHP, prefacing a variable name with the `&` symbol tells the parser to pass a reference to the variable's value, not the value itself. This concept can be hard to get your head around, so let's go back to the matchbox metaphor from Chapter 3.

Imagine that, instead of taking a piece of paper out of a matchbox, reading it, copying it to another piece of paper, putting the original back, and passing the copy to a function (phew!), you simply attach a piece of thread to the original piece of paper and pass one end of it to the function (see Figure 5-2).

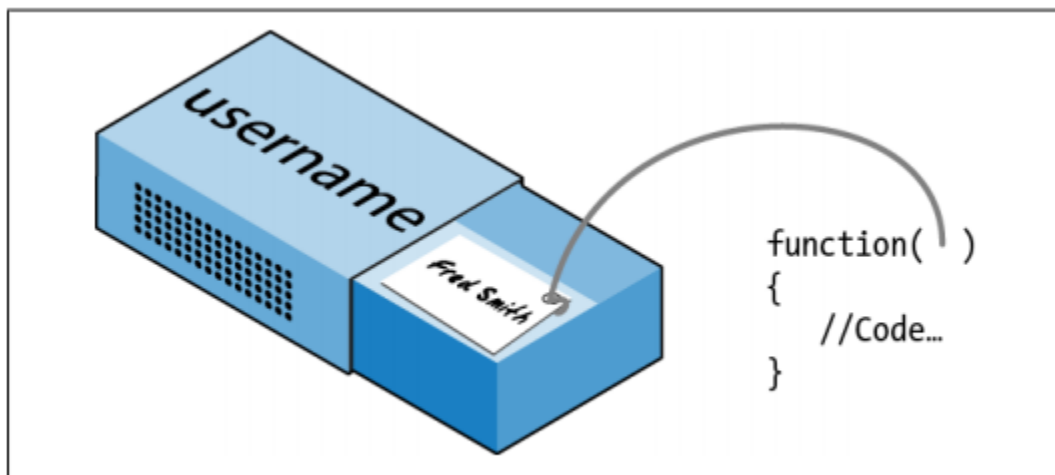

*Figure 5-2. Imagining a reference as a thread attached to a variable*

Figure 5-2. Imagining a reference as a thread attached to a variable

Now the function can follow the thread to find the data to be accessed. This avoids all the overhead of creating a copy of the variable just for the function's use. What's more, the function can now modify the variable's value.

```
<?php
$a1 = "WILLIAM";
$a2 = "henry";
$a3 = "gatES";
echo $a1 . " " . $a2 . " " . $a3 . "<br />";
fix_names($a1, $a2, $a3);
echo $a1 . " " . $a2 . " " . $a3;
function fix_names(&$n1, &$n2, &$n3)
{
    $n1 = ucfirst(strtolower($n1));
    $n2 = ucfirst(strtolower($n2));
    $n3 = ucfirst(strtolower($n3));
}
?>
```

Be careful when passing values by reference. If you need to keep the original values, make copies of your variables and then pass the copies by reference.

---

# SQL

**Server:** localhost

**Username:** root

**Password:** NULL



```

<?php
$connect_error='ja kini qi nonen e keni bo naj error naj kun me 1 fjal ka kersit naj ka hahaha';

$mysql_host='localhost';
$mysql_user='root';
$mysql_passw='';
//funksioni per konektim ne db.
mysql_connect($mysql_host,$mysql_user,$mysql_passw) || die($connect_error);
//argumenti i pare eshte hostname
//argumenti i dyte osht username
//edhe i treti passwordi NULL
//-----//
//funksioni qe e zgjedh db ne te cilen deshirojm mu konektu
$mysql_db='dbfirst';
mysql_select_db($mysql_db) or die($connect_error);
//argumenti e permban emrin e db ne te cilen po dojm mu konektu
//-----//
echo 'connected.';
if (mysql_connect($mysql_host,$mysql_user,$mysql_passw)&& mysql_select_db($mysql_db)) {
    echo 'Connected';
}
else{
    echo 'Not has connected.';//munesh edhe mi thon die();//per mja palu
}
?>

```

---

```

<?php
$connect_error='ja kini qi nonen :D e keni bo naj error naj kun me 1 fjal ka kersit naj ka hahaha';

$mysql_host='localhost';
$mysql_user='root';
$mysql_passw='';
//funksioni per konektim ne db.
mysql_connect($mysql_host,$mysql_user,$mysql_passw) || die($connect_error);
//argumenti i pare eshte hostname
//argumenti i dyte osht username
//edhe i treti passwordi NULL
//-----

```

```

//funksioni qe e zgjedh db ne te cilen deshirojm mu konektu
$mysql_db='dbfirst';
mysql_select_db($mysql_db) or die($connect_error);
//argumenti e permban emrin e db ne te cilen po dojm mu konektu
//-----
//echo 'Connected.';
/*if (mysql_connect($mysql_host,$mysql_user,$mysql_passw)&&
mysql_select_db($mysql_db)) {
    //echo 'Connected';
}
else{
    echo 'Not has connected.';
}
*/

//require 'connect.php';
//mysql_select_db($mysql_db) or die($connect_error);
$query="SELECT `food`,`calories` FROM `tblfood`";
$query="SELECT `food`,`calories` FROM `tblfood`WHERE `helthy_unhelthy`='h'AND `ID`='2'
ORDER BY `ID` DESC";
//$query="SELECT * FROM `tblfood`";
//$query_run=mysql_query($query)or die('spo bon');//->funk. qe e ben ekzekutimin e $query .
if ($query_run=mysql_query($query)//ekzekutimi i queryt) {
    //echo 'Executed';
    while ($query_row=mysql_fetch_assoc($query_run)//i merr te dhenat ne kolona) {
        $food=$query_row['food'];//e dhenat ne kolone
        $calories=$query_row['calories'];
        echo $food.' has '.$calories.' calories.'.'

```

```

        echo 'Nuk eshte zgjedhur as nje rekord.hyhyhy.';
    } else {
        while ($query_row=mysql_fetch_assoc($query_run)) {
            $food=$query_row['food'];//e dhena ne kolone
            $calories=$query_row['calories'];
            echo $food.' has '.$calories.' calories.'.'

```

```

}

```

---

```

<?php
include 'connect.php';
?>
<form action="db.php" method="GET">
    Select a food type:
    <select name="uh">
        <option value="h">Healthy</option>
        <option value="u">Un-healthy</option>
    </select><br><br>
    <input type="submit" value="Submit"/>
</form>

```

```

<?php
if (isset($_GET['uh'])&&!empty($_GET['uh'])) {
    $uh=$_GET['uh'];
    echo $uh;

    if($uh=='u'or $uh=='h'){

```

```

$query="SELECT `food`,`calories` FROM `tblfood`WHERE `helthy_unhelthy`='h'AND
`calories`<'100' ORDER BY `ID` DESC";
if ($query_run=mysql_query($query)) {
    if (mysql_num_rows/*nese nr i rreshtav*/($query_run)==NULL) {

```

```

        echo 'Nuk eshte zgjedhur as nje rekord.hyhyhy.'.'<br>'. 'tra-la-la tri-li-li Kupa mo
nuk ka parti';
    } else {
        while ($query_row=mysql_fetch_assoc($query_run)) {
            $food=$query_row['food'];//e dhena ne kolone
            $calories=$query_row['calories'];
            echo $food.' has '.$calories.' calories.'.'<br>';
        }
    }
}
else{
    echo mysql_error();
}
}
else{
    echo 'mos u muno me bo hack more kadrush i lodht';
}
}
?>

```

---

## SQL-QUERY

```

UPDATE `tbllogin`
SET `lastname` = 'Kastrati'
WHERE `ID` =1

```

```

SELECT *
FROM `tbllogin`
WHERE `ID` >1

```

```

DELETE FROM `tbllogin`
WHERE `ID` =2

```

```

INSERT INTO `tbllogin`
VALUES ('', 'armend.aziri7', 'armend123', 'Armend', 'Aziri')

```

```
INSERT INTO `tbllogin` ( `ID` , `username` , `password` , `firstname` , `lastn
ame` )
```

```
VALUES ( , 'afirm.morina3', 'afirm123', 'Afirm', 'Morina')
```

```
SELECT `tblpeople`.`name` , `tblpets`.`pet`
```

```
FROM `tblpeople`
```

```
LEFT JOIN `tblpets` ON `tblpeople`.`id` = `people_id`
```

```
/*
```

```
tbl food
```

ID	row=>rreshti food	calories	healthy_unhealthy
1	pizza	700	u kolona(coulom)
2	salad	200	h

```
$query_run="SELECT `food` FROM `tblfood` "
```

```
nese themi: mysql_num_rows($query_run)==NULL
```

```
->ky kusht osht false per shkak se numri i rreshtav osht 2 pra ky veq i numron nr e antarve
```

```
pra jan 2 antar ne rreshiti food-pizza&salad.
```

```
$query_run="SELECT * FROM `tblfood` "
```

```
$query_row=mysql_fetch_assoc($query_run)
```

```
-> ky funk kontrollon per qdo atribut(kolone) te tabelës pra per id,food,calories,h_u dhe i merr
```

```
te dhenat pra $query_row=1,pizza,700,u
```

```
*/
```

# SQL functions !

1. `mysql_connect('localhost','root','');`
2. `mysql_select_db('dbname');`
3. `mysql_query($query);` //execute query
4. `mysql_result($A,0,'ID');`  
ne kolonen te cilen ja caktojm
5. `mysql_fetch_assoc(mysql_query($query));`
6. `mysql_num_rows($query_run);` //nr. i antarve brenda rreshtit.

Sqarime per funk. 4 & 5.

5. `mysql_fetch_assoc`

//funk. qe i merr komplet te dhanat ne nje kolone te tabeles e nese don mi marr komplet te dhanat ne kejt rreshtat e tabeles ket funk. duhet me vendos brenda 1 unaze while p.s: `while(mysql_fetch_assoc(mysql_query($query)))` e nese duhet me caktu cilin rresht ne tabel dojm me marr kto e caaktojm me query pra e selektojm veq tabelen cilen dojm me marr.

nese dojm me marr vetem nje te dhen brenda kolones

`$A=mysql_fetch_assoc(mysql_query($query));`

`$B=$A['kolonen te ciles dojm mja marr vleren p.s: `food`'];`

4. `mysql_result`

//funk. qe e merr vleren brenda nje rreshti ne table.

hap1. me shkru query-n qe e zgjedh rreshtin ne te cilin dojm me mar vleren.

hapi 2. me ekzekutu ket query

hapi 3. me ekzekutu ket funk. : `mysql_result`

`$A=mysql_query($query);`

parametri i dyte: nr i kolones ku don me marr vleren.  
parametri i trete: emri i kolones ne tablee..

Zogu ma i mir prej kejtve !

```
/*
$query="SELECT * FROM `tblfood`";
$query_run=mysql_query($query);
while ($query_row=mysql_fetch_assoc($query_run)) {
// $query_row=mysql_fetch_assoc($query_run);
foreach ($query_row as $key) {
    echo $key.' | ';
}
echo '<br>';
}
/*
Rez:
1 | pizza | 1000 | u |
2 | salad | 200 | h |
3 | ice cream | 700 | u |
4 | mish i bardh | 3000 | h |
*/
die();
*/
```

# CODE !

```
<?php
include 'connect.php';
?>
<form action="db.php" method="GET">
    Select a food type:
    <select name="uh">
        <option value="h">Healthy</option>
        <option value="u">Un-healthy</option>
    </select><br><br>
    <input type="submit" value="Submit"/>
</form>
```

```
<?php
/*
tbl food
```

ID	food	calories	healthy_unhealthy
1	pizza	700	
2	salad	200	h

```
$query_run="SELECT `food` FROM `tblfood`"
```

nese themi: mysql\_num\_rows(\$query\_run)==NULL  
->ky kusht osht false per shkak se numri i rreshtav osht 2 pra ky veq i numron nr e antarve  
pra jan 2 antar ne rreshiti food-pizza&salad.

```
$query_run="SELECT * FROM `tblfood`"
$query_row=mysql_fetch_assoc($query_run)
-> ky funk kontrollon per qdo atribut(kolone) te tabelës pra per id,food,calories,h_u dhe i merr  
te dhenat pra $query_row=1,pizza,700,u
```

```
*/
```

```
/*
```

```
$query="SELECT * FROM `tblfood`";
$query_run=mysql_query($query);
while ($query_row=mysql_fetch_assoc($query_run)) {
//$query_row=mysql_fetch_assoc($query_run);
foreach ($query_row as $key) {
```



```

        echo $key.' | ' ;
    }
    echo '<br>';
}

```

Rez:

```

1 | pizza | 1000 | u |
2 | salad | 200 | h |
3 | ice cream | 700 | u |
4 | mish i bardh | 3000 | h |
die();
*/

```

```
/*
```

```

$query2="SELECT `count`FROM `tblhits_count`;
    if ($query_run=mysql_query($query2)) {
        $count=mysql_result($query_run,0, 'count');//argumenti i dyte osht ne cilin nr te kolones
pe don vleren qe osht aty

```

```
/*
```

```
count
```

```
0
```

```
1
```

```
2
```

```
10
```

```
pra nese e bojm $count=mysql_result($query_run,4, 'count'); ather
```

```

$count=10 poziten ne kolon e tregon.

```

```
*/
```

```
/*
```

```

$connect_error='ja kini qi nonen e keni bo naj error naj kun me 1 fjal ka kersit naj ka hahaha';

```

```

$mysql_host='localhost';

```

```

$mysql_user='root';

```

```

$mysql_passw="";

```

```

//funksioni per konektim ne db.

```

```

mysql_connect($mysql_host,$mysql_user,$mysql_passw) || die($connect_error) ;

```

```

//argumenti i pare eshte hostname

```

```

//argumenti i dyte osht username

```

```

//edhe i treti passwordi NULL

```

```

//-----

```

```

//funksioni qe e zgjedh db ne te cilen deshirojm mu konektu

```

```

$mysql_db='dbfirst';

```

```

mysql_select_db($mysql_db) or die($connect_error);

```

```

//argumenti e permaban emrin e db ne te cilen po dojm mu konektu

```

```

//-----

```

```

//echo 'Connected.';

```

```

if (mysql_connect($mysql_host,$mysql_user,$mysql_passw)&& mysql_select_db($mysql_db))
{

```

```

        //echo 'Connected';
    }
    else{
        echo 'Not has connected.';
    }*/

if (isset($_GET['uh'])&&!empty($_GET['uh'])) {
    $uh=$_GET['uh'];
    if($uh=='u'or $uh=='h'){
        $query="SELECT `food`,`calories` FROM `tblfood` WHERE
`helthy_unhelthy`='$uh' ORDER BY `ID` ";
if ($query_run=mysql_query($query)) {
    if (mysql_num_rows/*nese nr i rreshtav*/($query_run)==NULL) {
        echo 'Nuk eshte zgjedhur as nje rekord.hyhyhy.'.'

```

```

<?php
/*
$root='root';
$servername='localhost';
$pw="";

```

```
$dbname='dbfirst';
$connect=mysql_connect($servername,$root,$pw);
$selectdb=mysql_select_db($dbname);
```

```
$user_ip=$_SERVER['REMOTE_ADDR'];
```

```
function ip_exist($ip)
{
    global $user_ip;
    echo $user_ip;
```

```
}
FUNKSIONI QE I NDRYSHO TE DHENAT NE DB.
```

```
function update_counter()
```

```
{
    $query2="SELECT `count`FROM `tblhits_count`;
    if ($query_run=mysql_query($query2)) {
        $count=mysql_result($query_run,0, 'count');//argumenti i dyte osht ne cilin nr te kolones
```

```
pe don vleren qe osht aty
```

```
/*
```

```
count
```

```
0
```

```
1
```

```
2
```

```
10          pra nese e bojm $count=mysql_result($query_run,4, 'count'); ather
```

```
$count=10 poziten ne kolon e tregon.
```

```
    $count_inc=$count+1;
```

```
    $query="UPDATE `tblhits_count` SET `count`='$count_inc';
```

```
    $query_run=mysql_query($query);
```

```
}
```

```
}
```

```
update_counter();
```

```
*/
```

```
?>
```

# Tabela me php.

```
<?php
$a='localhost';
$b='root';
$c="";
mysql_connect($a,$b,$c);
$d='dbfirst';
mysql_select_db($d);
echo '<table border=2px>
<tr>
    <th>ID</th>
    <th>food</th>
    <th>calories</th>
    <th>healthy_unhealthy</th>
</tr>';
$query="SELECT * FROM `tblfood`";
$query_run=mysql_query($query);
while ($query_row=mysql_fetch_assoc($query_run)) {
    echo '<tr>';
    foreach ($query_row as $key) {
        echo '<td>'.$key.'</td>';
    }
    echo '</tr>';
}
echo '</table>';
?>
```

## TABELA ME PHP (hard code)

```
<?php //localhost/db/table_with_php.php
$a='localhost';
$b='root';
$c="";
mysql_connect($a,$b,$c);
$d='dbfirst';
mysql_select_db($d);

$query1="SELECT `ID` FROM `tblfood`";
$query_run1=mysql_query($query1);
$query_row1=mysql_result($query_run1,0,`ID`);

$query2="SELECT `food` FROM `tblfood`";
$query_run2=mysql_query($query2);
$query_row2=mysql_result($query_run2,0,`food`);

$query3="SELECT `calories` FROM `tblfood`";
$query_run3=mysql_query($query3);
$query_row3=mysql_result($query_run3,0,`calories`);

$query4="SELECT `helthy_unhelthy` FROM `tblfood`";
$query_run4=mysql_query($query4);
$query_row4=mysql_result($query_run4,0,`helthy_unhelthy`);
?>
<table border="2px">
    <tr>
        <th>ID</th>
        <th>food</th>
        <th>calories</th>
        <th>healthy_unhealthy</th>
    </tr>
    <tr>
        <td><?php echo $query_row1=mysql_result($query_run1,0,`ID`);
?></td>
        <td><?php echo $query_row2=mysql_result($query_run2,0,`food`);
?></td>
        <td><?php echo $query_row3=mysql_result($query_run3,0,`calories`);?></td>
        <td><?php echo
$query_row4=mysql_result($query_run4,0,`helthy_unhelthy`);?></td>
    </tr>
```

```

<tr>
    <td><?php    echo $query_row1=mysql_result($query_run1,1,`ID`);
?></td>
    <td><?php    echo $query_row2=mysql_result($query_run2,1,`food`);
?></td>
    <td><?php echo $query_row3=mysql_result($query_run3,1,`calories`);?></td>
    <td><?php echo
$query_row4=mysql_result($query_run4,1,`helthy_unhelthy`);?></td>
</tr>

<tr>
    <td><?php    echo $query_row1=mysql_result($query_run1,2,`ID`);
?></td>
    <td><?php    echo $query_row2=mysql_result($query_run2,2,`food`);
?></td>
    <td><?php echo $query_row3=mysql_result($query_run3,2,`calories`);?></td>
    <td><?php echo
$query_row4=mysql_result($query_run4,2,`helthy_unhelthy`);?></td>
</tr>

<tr>
    <td><?php    echo $query_row1=mysql_result($query_run1,3,`ID`);
?></td>
    <td><?php    echo $query_row2=mysql_result($query_run2,3,`food`);
?></td>
    <td><?php echo $query_row3=mysql_result($query_run3,3,`calories`);?></td>
    <td><?php echo
$query_row4=mysql_result($query_run4,3,`helthy_unhelthy`);?></td>
</tr>

</table>

```

# Log in System!

Fajlli : index.php

```
<?php
    /*echo $a=md5('123456');
    die(); per mi regjistru hashin e pw */
    require 'connect.php';
    require 'core.inc.php';
    if (loggedIn()) {
        echo 'Youre logged in.<a href="logout.php">Log out</a>';
    } else {
        include 'loginform.inc.php';
    }
?>
```

---

Fajlli : loginform.inc.php

```
<?php
    if (isset($_POST['user'])&&isset($_POST['psw'])) {
        $user=htmlentities($_POST['user']);
        $psw=htmlentities($_POST['psw']);
        $psw_hash=md5($psw);
        if (!empty($user)&&!empty($psw_hash)) {
            $query="select `id` from `tblusers`
where`username`='".mysql_escape_string($user)."' and
`password`='".mysql_escape_string($psw_hash)."' ";
            if($query_run=mysql_query($query)){
                $query_nun_rows=mysql_num_rows($query_run);
                //kjo variabel deklarohet me qellim qe me kshyr se nese
                useri dha psw nuk perputhen
                //d.m.th nese kjo variabel osht zero ka ndodh naj gabim
                ne dhenjen e userit dhe pw
                // nuk egziston i regjistrum ne bd nje kombinim i till.
                if ($query_nun_rows==0) {
                    echo 'Invalid username/password combination.';
                } else if($query_nun_rows==1){
                    //echo $psw_hash; 123456 hashi
                    e10adc3949ba59abbe56e057f20f883e
```

```

        $user_id=mysql_result($query_run,0,'id');
        $_SESSION['user_id']=$user_id;
        header('Location: index.php');
    }
}
}else{
    echo 'You must supply a username and password.';
}
}
?>
<form action="<?php echo $current_file ?>" method="POST">
    <table>
        <tr>
            <td>Username:</td>
            <td><input type="text" name="user"></td>
        </tr>
        <tr>
            <td>Password:</td>
            <td><input type="password" name="psw"></td>
        </tr>
    </table>
    <input type="submit" value="Log in">
</form>

```

---

**Fajlli : core.inc.php**

```

<?php
ob_start();
session_start();
$current_file=$_SERVER['SCRIPT_NAME'];
$http_referer=$_SERVER['HTTP_REFERER'];
function loggedIn(){
    if (isset($_SESSION['user_id'])&&!empty($_SESSION['user_id'])) {
        return true;
    } else {
        return false;
    }
}
?>

```



---

**Fajlli : connect.php**

```
<?php
$mysql_host='localhost';
$mysql_user='root';
$mysql_passw="";
$mysql_db='dbfirst';
if(mysql_connect($mysql_host,$mysql_user,$mysql_passw) &&
mysql_select_db($mysql_db)) {
    //echo 'connected';
}
else{
    die(mysql_error());
}
?>
```

---

**Fajlli : logout.php**

```
<?php
require 'core.inc.php';
//echo $http_referer;
session_destroy();
header('Location: '.$http_referer);
?>
```

---

# File Uploads Series.

---

```
<?php
if (isset($_FILES['newfile'])) {

    //      $_FILES-> Variabla e Fajllit njejt si $_SERVER apo $_POST ose GET
    //      pra kjo variabla eshte e tipit vektor me 2 indeksa
    //      indeksi i pare  ['newfile'] e tregon emrin e kontrolles fajll kurse indeksi ['name'] e merr
    //      emrin e fajllit
    //      $_FILES['newfile']['name'] p.s->rez: fotojaDeti.PNG
    //      $_FILES['newfile']['size'] -> madhsin e fajllit ne bajta pra nr e batjav nese foto esht 3Mb
    //      rez:3 000 000
    //      $File_Tmp= $_FILES['newfile']['type'] ->tipin e fajllit rez: .PNG
    //      $Temporary_Name=$_FILES['newfile']['tmp_name'] ->pathi apo direktoriumi ku gjendet
    //      fajlli

    $File_Name= $_FILES['newfile']['name'].'<br>';//
    $File_Size= $_FILES['newfile']['size'].'<br>';
    $File_Tmp= $_FILES['newfile']['type'].'<br>';
    $Temporary_Name=$_FILES['newfile']['tmp_name'];

    if (isset($File_Name)) {
        echo 'oks';
    }

    }
    else{
        echo 'blla';
    }

    ?>

<form enctype="multipart/form-data" action="1.php" method="POST">
<input name="newfile" type="file" /><br />
<input type="submit" value="Upload File" />
</form>
```

---

```

$name= $_FILES['newfile']['name'];
//$size= $_FILES['newfile']['size'];
//$type= $_FILES['newfile']['type'];
$tmp_name=$_FILES['newfile']['tmp_name'];
if (isset($name)) {
    if (!empty($name)) {
        echo 'oks';
    }else{
        echo 'blla';
    }
}
?>
<form enctype="multipart/form-data" action="1.php" method="POST">
<input name="newfile" type="file" /><br />
<input type="submit" value="Upload File" />
</form>

```

---

```

<?php
$name= $_FILES['newfile']['name'];
$extension=strtolower(substr($name, strpos($name, '.') +1 ));//rez: jpg d.m.tm tipin e fajllit
/*-strpos-> me gjet se ne cilen pozit fillon teksti i kerkuar brenda 1 stgringu
    $find='is';
    $find_length=strlen($find);
    $string='this is a boy';
    echo strpos($string,$find,3);//argumenti i 1
    //osht ne cilin string me bo kerkimin, argumenti
    //i dyte osht qka me kerku, edhe argumenti
    //trete osht prej ciles pozit mja fillu kerkimin

    substr(string, start);
    //argumenti i pare osht ne cilin string mirret teksti ne cilen variabel ka me vepru funksioni
    //argumenti i dyte sprej ciles pozite (indeks) ka mu marr teksti
    $stringu='blla-BLLA'
    substr($stringu, 5);    rez:    BLLA
*/
$size= $_FILES['newfile']['size'];
$max_size=2097152;
$type= $_FILES['newfile']['type'];
$tmp_name=$_FILES['newfile']['tmp_name'];

if (isset($name)) {
    if (!empty($name)) {
if ($extension=='jpg' || $extension=='jpeg' && $type=='image/jpeg' && $size<=$max_size ) {

```

```

$location='upload/';
if( move_uploaded_file($tmp_name, $location.$name)){
    echo "upload";
}else{
    echo 'error in upload.';
}
}
}
}else{
    echo 'File must be jpg/jpeg and must be 2Mb or less.';
}
}
} //2MB=2 097 152 bajt

```

```

?>
<form enctype="multipart/form-data" action="1.php" method="POST">
<input name="newfile" type="file" /><br />
<input type="submit" value="Upload File" />
</form>

```

---

## Aksioni ne nje modul(faqe, dritare) te re

Tek raste kur behet “SUBMIT” edhe ndryshon permbajtja e faqes ateher tek butoni per submit ne atributin action vendoset emri I fajlli qe e ka at permbajtje. P.s

Nese bejm sarch ne nje faqe dhe rezultatin e sarchit dojm ta shfaqmi me nje permbajtje te re (faqe te re) ateher te atributi action vendoset: action=”permbajtja e re.php”

Fajlli a.php

```

<?php?>
<form action="b.php" method="POST">
<input type="text" name="txt1"/>
<input type="submit" value ="dergo"/>
</form>

```

Fajlli b.php

```

<?php
if (isset($_POST['txt1'])) {
    $var=$_POST['txt1'];
    if (!empty($var)) {
        echo $var;
    }
}
?>

```

---

## DOCUMENT SHOW IMAGE FILES (SHFAQJA NE DOKUMENT E IMAZHEV-FOTOV)

```
<?php
if(mysql_connect("127.0.0.1","root","")){
    echo 'conn'.<br>;
if(mysql_select_db("tutorial")){
    echo 'select'.<br>;
//if (isset($_GET['id'])) {
//    $id=$_GET['id'];
    $id=3;
    if($query=mysql_query("SELECT * FROM `blob` WHERE `id`='".$id"'")){
        echo 'zgj'.<br>;
        while($row = mysql_fetch_assoc($query))
        {
            echo '';

        }
    }
}
}
?>
```

---

## Kodi per me danwolad fajlla

```
<?php
$mysql_db='dbblobtest';//emri i DB ku deshiron me ruajt :D
$mysql_host='localhost';
$mysql_user='root';
$mysql_passw="";
if(mysql_connect($mysql_host,$mysql_user,$mysql_passw)){
    if(mysql_select_db($mysql_db)){
$query="SELECT `kontenti` FROM `tblimg` WHERE ID='3'";
    if ($query_run=mysql_query($query)) {
        $row = mysql_fetch_assoc($query_run);
        // Print headers
        header("Content-Type: ". $row['mime']);
        header("Content-Length: ". $row['size']);
```

```
        header("Content-Disposition: attachment; filename=". $row['name']);
        // Print data
        echo $row['data'];
    }
}
?>
```

---

## Rreshtat e Artë-Pasimi i vlerav ne fajlla tjere!

Fajlli : a.php

```
<?php
echo '<a href="b.php?id=4"></a>';
?>
```

Fajlli : b.php

```
<?php
$id=$_GET['id'];
echo $id;
// REZ: 4
?>
```

---

```

CREATE TABLE `tblvetura` (
  `ID` int(11) NOT NULL AUTO_INCREMENT,

  `LlojiVetures` varchar(50) NOT NULL,

  `ModeliVetures` varchar(50) NOT NULL,

  `Karburanti` varchar(50) NOT NULL,

  `Marshi` varchar(50) NOT NULL,

  `Kilometrat` varchar(50) NOT NULL,

  `Qmimi` varchar(50) NOT NULL,

  `Viti` varchar(50) NOT NULL,

  `Ngjyra` varchar(50) NOT NULL,


  `Kubikazha` varchar(50) ,

  `Fuqia` varchar(50) ,

  `EuroStandardi` varchar(50) ,

  `AnaTimonit` varchar(50) ,

  `NrDyerve` varchar(50) ,

  `NrUlseve` varchar(50) ,

  `Klima` varchar(50) ,

  `MatrialiEnterierit` varchar(50) ,

  `NgjyraEnterierit` varchar(50) ,

  `Regjistrimi` varchar(50) ,

  `Doganuar` varchar(50) ,

  `OrigjinaVetures` varchar(50) ,

  `Dentimi` varchar(50) ,

  `QmimiPaDisk` varchar(50) ,

```

`QmimiDisk` varchar(50) ,  
`QmimiNdrim` varchar(50) ,  
`PershkrimiDemtimit` varchar(200) ,

`Airbag` varchar(20) ,  
`ChildLock` varchar(50) ,  
`ABS` varchar(20) ,  
`ESP` varchar(20) ,  
`ASR` varchar(20) ,  
`Alarm` varchar(20) ,  
`MbylljeElektronike` varchar(50) ,

`TimoniHidraulik` varchar(50) ,  
`TimoniMultifunksional` varchar(50) ,  
`SensorParkingu` varchar(50) ,  
`NdhmeParkimi` varchar(50) ,

`Tempomat` varchar(50) ,  
`Shiber` varchar(50) ,  
`Navigacion` varchar(50) ,  
`DisqetAlumini` varchar(50) ,



`KulmiPanoramik` varchar(50) ,

`DritaretElektronike` varchar(50) ,

`DritatMjegulles` varchar(50) ,

`Xenon` varchar(50) ,

`PasqyratNxemje` varchar(50) ,

`PasqyretElektronike` varchar(50) ,

`SensorDrita` varchar(50) ,

`SensorShi` varchar(50) ,

`UlsetElektronike` varchar(50) ,

`UlsetNxemje` varchar(50) ,

`RadioCD` varchar(50) ,

`CDChanger` varchar(50) ,

`PerskrimShteseVetures` varchar(200) ,

`FotoKopertines` longblob NOT NULL,

`Foto2` longblob NOT NULL,

`Foto3` longblob NOT NULL,

PRIMARY KEY (`ID`)

)

---

---

## AUTO TRENTI- FORMA SHTO VETURA

---

---

```
<?php
include 'header.php';
include 'nav.php';

?>

<html>

<head>

<meta http-equiv="Content-Type" content="text/html; charset=UTF-8">

<meta charset="UTF-8"><title>Auto Trendi</title>

<meta name="generator" content="MediaWiki 1.23wmf2">

</head>

<style>

input[type="text"] {
width: 175px;
}

h1{
    color:rgb(192,192,192);
    font-size: 50px;
    font-family: serif;
    padding: 20px;
}

#trupi{
    background-color: #FFF;
```

```
border-left :1px solid rgb(192,192,192);
border-right:1px solid rgb(192,192,192);
width: 940px;
height: auto;
margin: 0px auto;
font-size: 19px;
font-color:rgb(136,132,132);
}
label{
    color:rgb(136,132,132); font-size:15px;
    padding: 20px;
}
table{
line-height: 35px;

}
option{

}

</style>
<body>

<div id="trupi" >

<!--Validimi i formes php dhe mrrja e te dhenave-->
```

```
<div id="phpValidation"style="
```

```
margin: 0px 150px;
```

```
font-size: large;
```

```
color: #C0C210;
```

```
width: 450px;
```

```
height: auto;">
```

```
<?php
```

```
////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////
```

```
                //////////////////////////////////
```

```
            //      Fotografite      //
```

```
            //////////////////////////////////
```

```
$max_size=3145728;//1048576 // 2097152 // 3145728
```

```
//-----
```

```
//      Foto Kopertines
```

```
$nameFotoKopertines      = $_FILES['fotoKopertines']['name'];
```

```
$extensionFotoKopertines =strtolower(substr($nameFotoKopertines,  
strpos($nameFotoKopertines, '.') +1 ));
```

```
$sizeFotoKopertines      = $_FILES['fotoKopertines']['size'];
```

```
$typeFotoKopertines      = $_FILES['fotoKopertines']['type'];
```

```
$tmp_nameFotoKopertines  =$_FILES['fotoKopertines']['tmp_name'];
```

```
//-----
```

```
//      Foto 2
```

```
$nameFoto2      = $_FILES['foto2']['name'];
```

```
$extensionFoto2 =strtolower(substr($nameFoto2, strpos($nameFoto2, '.') +1 ));
```

```
$sizeFoto2      = $_FILES['foto2']['size'];
```

```
$typeFoto2      = $_FILES['foto2']['type'];
```

```
$tmp_nameFoto2  =$_FILES['foto2']['tmp_name'];
```

```
//-----
```

```
//      Foto 3
```

```
$nameFoto3      = $_FILES['foto3']['name'];
```

```
$extensionFoto3 =strtolower(substr($nameFoto3, strpos($nameFoto3, '.') +1 ));
```

```
$sizeFoto3      = $_FILES['foto3']['size'];
```

```
$typeFoto3      = $_FILES['foto3']['type'];
```

```
$tmp_nameFoto3  =$_FILES['foto3']['tmp_name'];
```

```
//-----
```

```
if (isset($_POST['txtLlojiVetures']) && isset($_POST['txtModeliVetures']) &&  
isset($_POST['cmbKarburanti']) &&
```

```
isset($_POST['cmbMarshi']) &&isset($_POST['Kilometrat']) && isset($_POST['txtQmimi'])
```

```
&& isset($_POST['cmbViti']) && isset($_POST['cmbNgjyra'])
```

```
&& isset($nameFotoKopertines) && isset($nameFoto2) && isset($nameFoto3) ) {
```

```
////////////////////////////////////
```

```

////////////////////////////////////

// Informacionet Pergjithshme //

////////////////////////////////////

//i kom testu OKs!

$txtLlojiVetures    =htmlentities(mysql_real_escape_string($_POST['txtLlojiVetures']));
$txtModeliVetures   =htmlentities(mysql_real_escape_string($_POST['txtModeliVetures']));
$cmbKarburanti      =htmlentities(mysql_real_escape_string($_POST['cmbKarburanti']));
$cmbMarshi          =htmlentities(mysql_real_escape_string($_POST['cmbMarshi']));
$Kilometrat         =htmlentities(mysql_real_escape_string($_POST['Kilometrat']));
$txtQmimi           =htmlentities(mysql_real_escape_string($_POST['txtQmimi']));
$cmbViti            =htmlentities(mysql_real_escape_string($_POST['cmbViti']));
$cmbNgjyra          =htmlentities(mysql_real_escape_string($_POST['cmbNgjyra']));

////////////////////////////////////

////////////////////////////////////

// Informacionet Shtese //

////////////////////////////////////

//i kom testu OKs!

$cmbKubikazha       =htmlentities(mysql_real_escape_string($_POST['cmbKubikazha']));
$cmbFuqia            =htmlentities(mysql_real_escape_string($_POST['cmbFuqia']));

$cmbEuroStandardi
=htmlentities(mysql_real_escape_string($_POST['cmbEuroStandardi']));

$cmbAnaTimonit       =htmlentities(mysql_real_escape_string($_POST['cmbAnaTimonit']));
$cmbNrDyerve         =htmlentities(mysql_real_escape_string($_POST['cmbNrDyerve']));
$cmbNrUlseve         =htmlentities(mysql_real_escape_string($_POST['cmbNrUlseve']));

```

```

$cmbKlima          =htmlentities(mysql_real_escape_string($_POST['cmbKlima']));

$cmbMatrialiEnterierit
=htmlentities(mysql_real_escape_string($_POST['cmbMatrialiEnterierit']));

$cmbNgjyraEnterierit
=htmlentities(mysql_real_escape_string($_POST['cmbNgjyraEnterierit']));

$cmbRegjistrimi    =htmlentities(mysql_real_escape_string($_POST['cmbRegjistrimi']));

$cmbDoganuar       =htmlentities(mysql_real_escape_string($_POST['cmbDoganuar']));

$cmbOrigjinaVetures
=htmlentities(mysql_real_escape_string($_POST['cmbOrigjinaVetures']));

$cmbDemtimi        =htmlentities(mysql_real_escape_string($_POST['cmbDemtimi']));

$cbxQmimiPaDisk
=htmlentities(mysql_real_escape_string($_POST['cbxQmimiPaDisk']));

$cbxQmimiDisk      =htmlentities(mysql_real_escape_string($_POST['cbxQmimiDisk']));

$cbxQmimiNdrim
=htmlentities(mysql_real_escape_string($_POST['cbxQmimiNdrim']));

$txareaPershkrimiDemtimit
=htmlentities(mysql_real_escape_string($_POST['txareaPershkrimiDemtimit']));

////////////////////////////////////

                //////////////////////////////////

                // Paisjet e Sigurise //

                //////////////////////////////////

// i kom testu OKs !

$cbxAirbag         =htmlentities(mysql_real_escape_string($_POST['cbxAirbag']));

$cbxChildLock      =htmlentities(mysql_real_escape_string($_POST['cbxChildLock']));

$cbxABS            =htmlentities(mysql_real_escape_string($_POST['cbxABS']));

$cbxESP            =htmlentities(mysql_real_escape_string($_POST['cbxESP']));

```



```

$cbxASR          =htmlentities(mysql_real_escape_string($_POST['cbxASR']));

$cbxAlarm        =htmlentities(mysql_real_escape_string($_POST['cbxAlarm']));

$cbxMbylljeElektronike
=htmlentities(mysql_real_escape_string($_POST['cbxMbylljeElektronike']));

////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////////

                //////////////////////////////////////////////////////////////////

                //      Aksesoret      //

                //////////////////////////////////////////////////////////////////

// i kom testu OKs !

$cbxTimoniHidraulik
=htmlentities(mysql_real_escape_string($_POST['cbxTimoniHidraulik']));

$cbxTimoniMultifunksional
=htmlentities(mysql_real_escape_string($_POST['cbxTimoniMultifunksional']));

$cbxSensorParkingu
=htmlentities(mysql_real_escape_string($_POST['cbxSensorParkingu']));

$cbxNdhmeParkimi
=htmlentities(mysql_real_escape_string($_POST['cbxNdhmeParkimi']));

$cbxTempomat      =htmlentities(mysql_real_escape_string($_POST['cbxTempomat']));

$cbxShiber        =htmlentities(mysql_real_escape_string($_POST['cbxShiber']));

$cbxNavigacion    =htmlentities(mysql_real_escape_string($_POST['cbxNavigacion']));

$cbxDisqetAluminit
=htmlentities(mysql_real_escape_string($_POST['cbxDisqetAluminit']));

$cbxKulmiPanoramik
=htmlentities(mysql_real_escape_string($_POST['cbxKulmiPanoramik']));

$cbxDritaretElektronike
=htmlentities(mysql_real_escape_string($_POST['cbxDritaretElektronike']));

```

```

$cbxDritatMjegulles
=htmlentities(mysql_real_escape_string($_POST['cbxDritatMjegulles']));

$cbxXenon          =htmlentities(mysql_real_escape_string($_POST['cbxXenon']));

$cbxPasqyratNxemje
=htmlentities(mysql_real_escape_string($_POST['cbxPasqyratNxemje']));

$cbxPasqyretElektronike
=htmlentities(mysql_real_escape_string($_POST['cbxPasqyretElektronike']));

$cbxSensorDrita    =htmlentities(mysql_real_escape_string($_POST['cbxSensorDrita']));

$cbxSensorShi      =htmlentities(mysql_real_escape_string($_POST['cbxSensorShi']));

$cbxUlsetElektronike
=htmlentities(mysql_real_escape_string($_POST['cbxUlsetElektronike']));

$cbxUlsetNxemje
=htmlentities(mysql_real_escape_string($_POST['cbxUlsetNxemje']));

$cbxRadioCD        =htmlentities(mysql_real_escape_string($_POST['cbxRadioCD']));

$cbxCDChanger      =htmlentities(mysql_real_escape_string($_POST['cbxCDChanger']));

////////////////////////////////////

////////////////////////////////////

//  Pershkrimi shtese i vetures  //

////////////////////////////////////

// e kom testu OK !

$PershkrimShteseVetures
=htmlentities(mysql_real_escape_string($_POST['PershkrimShteseVetures']));

```

//

```
if (!empty($txtLlojiVetures) && !empty($txtModeliVetures) && !empty($cmbKarburanti) &&
!empty($cmbMarshi) && !empty($Kilometrat)&& !empty($txtQmimi) && !empty($cmbViti)
&& !empty($cmbNgjyra)
```

```
&& !empty($nameFotoKopertines) &&!empty($nameFoto2) && !empty($nameFoto3) ) {
if (($extensionFotoKopertines=='jpg' || $extensionFotoKopertines=='jpeg') &&
($extensionFoto2=='jpg' || $extensionFoto2=='jpeg' )
```

```
&& ($extensionFoto3=='jpg' || $extensionFoto3=='jpeg' )
&& $typeFotoKopertines=='image/jpeg' && $typeFoto2=='image/jpeg' &&
$typeFoto3=='image/jpeg'
```

```
&& $sizeFotoKopertines<=$max_size && $sizeFoto2<=$max_size &&
$sizeFoto3<=$max_size ) {
```

```
// echo 'oks';
```

```
//fotot ruhen me kshyr qeta 2 ifat qetu afer mi validu.
```

```
mysql_connect("127.0.0.1","root","");
```

```
mysql_select_db("autotrendi");
```

```
$BLOBfotoKopertines=mysql_real_escape_string(file_get_contents($_FILES['fotoKopertines']['tmp_name']));
```

```
$BLOBFoto2=mysql_real_escape_string(file_get_contents($_FILES['foto2']['tmp_name']));
```

```
$BLOBFoto3=mysql_real_escape_string(file_get_contents($_FILES['foto3']['tmp_name']));
```

```
if(mysql_query(" INSERT INTO `tblvetura`(`ID`,`LlojiVetures`,`ModeliVetures`,`Karburanti`,`Marshi`,`Kilometrat`,`Qmimi`,`Viti`,`Ngjyra`,`Kubikazha`,`Fuqia`,`EuroStandardi`,`AnaTimonit`,`NrDyerve`,`NrUlseve`,`Klima`,`MatrialiEnterierit`,`NgjyraEnterierit`,`Regjistrimi`,`Doganuar`,`OrigjinaVetures`,`Demtimi`,`QmimiPaDisk`,`QmimiDisk`,`QmimiNdrim`,`PerskrimiDemtimit`,`Airbag`,`ChildLock`,`ABS`,`ESP`,`ASR`,`Alarm`,`MbylljeElektronike`,`TimoniHidraulik`,`TimoniMultifunksional`,`SensorParking`,`NdihmeParkimi`,`Tempomat`,`Shiber`,`Navigacion`,`DisqetAlumini`,`KulmiPanoramik`,`DritaretElektronike`,`DritatMjegulles`,`Xenon`,`PasqyratNxemje`,`PasqyretElektronike`,`SensorDrita`,`SensorShi`,`UlsetElektronike`,`UlsetNxemje`,`RadioCD`,`CDChanger`,`PerskrimShteseVetures`,`FotoKopertines`,`Foto2`,`Foto3`))
```

```
VALUES ('','$txtLlojiVetures','$txtModeliVetures','$scmbKarburanti','$scmbMarshi','$Kilometrat','$txtQmimi','$scmbViti','$scmbNgjyra',
```

```
'$scmbKubikazha','$scmbFuqia','$scmbEuroStandardi','$scmbAnaTimonit','$scmbNrDyerve','$scmbNrUlseve','$scmbKlima','$scmbMatrialiEnterierit','$scmbNgjyraEnterierit','$scmbRegjistrimi','$scmbDoganuar','$scmbOrigjinaVetures','$scmbDemtimi','$scbxQmimiPaDisk','$scbxQmimiDisk','$scbxQmimiNdrim','$txareaPerskrimiDemtimit',
```

```
'$scbxAirbag','$scbxChildLock','$scbxABS','$scbxESP','$scbxASR','$scbxAlarm','$scbxMbylljeElektronike',
```

```
'$scbxTimoniHidraulik','$scbxTimoniMultifunksional','$scbxSensorParking','$scbxNdihmeParkimi','$scbxTempomat','$scbxShiber','$scbxNavigacion','$scbxDisqetAlumini','$scbxKulmiPanoramik','$scbxDritaretElektronike','$scbxDritatMjegulles','$scbxXenon','$scbxPasqyratNxemje','$scbxPasqyretElektronike','$scbxSensorDrita','$scbxSensorShi','$scbxUlsetElektronike','$scbxUlsetNxemje','$scbxRadioCD','$scbxCDChanger',
```

```
'$PerskrimShteseVetures',
```

```
'$BLOBfotoKopertines','$BLOBFoto2','$BLOBFoto3' ) ")){
```

echo "Të dhenat u ruajtën

, këto të dhëna do të verifikohen nga ana e stafit tonë

, dhe në qoftë se janë të sakta do të publikohen ne Web-sajtin tonë.

Jeni të mirëpritur për vrejtje sugjerime si dhe publikim tjera.;

```
}

else{

    echo 'Ka probleme në funksionim te Web-it ju lutemi provoni më vone që të ngarkoni të
    dhënat.';

}

}

else{

    echo '<br>'.' Kërkesa juaj nuk është pranuar.

    Fotot të cilat i keni ngarkuar nuk kan qen te formatit JPG/JPEG,

    ose keni ngarkuar foto te cilat janë më të mëdha se 3 Mbajt.

    Plotësoni edhe një herë fushat Obliguese. Dhe ngarkoni fotot ne formatin JPG/JPEG dhe më te
    vogla se 3 Mbajt';

}

}

else {

    echo '<br>'.'Kërkesa juaj nuk është pranuar.

    Nuk i keni mbushur fushat të cilat janë të OBLIGUESHME për tu plotësuar.
```

Plotësoni edhe një herë fushat Obliguese.';

}

}

?>

</div>

<br>

<p style="color:rgb(136,132,132);font-size:25px;margin:0px 100px;font-family:serif;font-style: italic;">Shto Karakteristika e veturës</p>

<br>

<form name="frmShtoauto" method="POST" action="shtoNjeVeture.php" enctype="multipart/form-data">

<!--INFORMACIONET E

PERGJITHSHME\*\*\*\*\*  
\*\*\*\*\*-->

<fieldset style="border: 2px groove threedface;padding:10px; margin:5px 5px;">

<legend style="color: #C0C210;font-size: larger;">Informacionet e përgjithëshme</legend>

<table>

<tr>

<td ><label>Lloji i Veturës</label></td>

<td><input type="text" name="txtLlojiVetures" maxlength="30"/></td>

<td ><label >Modeli</label></td>

<td ><input type="text" name="txtModeliVetures" maxlength="30"/></td>

</tr>

```
<tr>

<td><label>Karburanti</label></td>

<td><select name="cmbKarburanti" style="width:175px;">

  <option value=""></option>

  <option value="Dizel">Dizel</option>

  <option value="Benzin">Benzin</option>

  <option value="Benzin & Gas">Benzin & Gas</option>

  <option value="Benzin & Hidrid">Benzin & Hidrid</option>

  <option value="Gas">Gas</option>

  <option value="Energji Elektrike">Energji elektrike</option>

</select>

<td><label>Marshi</label></td>

<td>

<select name="cmbMarshi" style="width:175px;">

  <option value=""></option>

  <option value="Manual 4 shpejtesi">Manual 4 shpejtesi</option>

  <option value="Manual 5 shpejtesi">Manual 5 shpejtesi </option>

  <option value="Manual 6 shpejtesi">Manual 6 shpejtesi</option>

  <option value="Gjysme Automatik">Gjysme Automatik</option>

  <option value="Automatik">Automatik</option>

</select>

</td>

</tr>
```

```

<tr>

<td ><label>Kilometrat</label></td>

<td><input type="text" name="Kilometrat" maxlength="30"/></td>

<td ><label>Qmimi</label></td>

<td ><input type="text" name="txtQmimi"/></td>

</tr>

```

```

<tr>

<td ><label>Viti</label></td>

<td ><select name="cmbViti" style="width:175px;">

<option value=""></option>

<option value="2013">2013</option>

<option value="2012">2012</option>

<option value="2011">2011</option>

<option value="2010">2010</option>

<option value="2009">2009</option>

</select></td>

<td><label>Ngjyra</label></td>

<td style=" color:rgb(136,132,132);">

<select name="cmbNgjyra" style="width:175px;" >

<option value=""></option>

<option value="Zeze">Zezë</option>

<option value="Kuqe">Kuqe</option>

<option value="Kalter">Kaltër</option>

```



</select>

</td>

</tr>

</table>

</fieldset>

<!--\*\*\*\*\*INFORMACIONET

SHTESE\*\*\*\*\*

\*\*\*\*\*-->

<fieldset style="border: 2px groove threedface;padding:10px; margin:5px 5px;">

<legend style="color: #C0C210;font-size: larger;;">Informacione shtese</legend>

<br>

<!--

<details>

<summary>Opsionale</summary>

-->

<table>

<tr>

<td><label>Kubik

(ccm)&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</label></td>

<td>

<select name="cmbKubikazha" style="width:175px;">

<option value=""></option>

```
<option value="1100">1100</option>
<option value="1200">1200</option>
<option value="1300">1300</option>
<option value="1400">1400</option>
<option value="1500">1500</option>
<option value="1600">1600</option>
</select>
<td><label>Fuqia</label></td>
<td style=" color:rgb(136,132,132);">
<select name="cmbFuqia" style="width:175px;" >
<option value=""></option>
<option value="120">120</option>
<option value="130">130</option>
<option value="140">140</option>
<option value="150">150</option>
<option value="200">200</option>
<option value="250">250</option>
<option value="300">300</option>
<option value="350">350</option>
<option value="380">380</option>
<option value="500">500</option>
</select>&nbsp;&nbsp;&nbsp; kW. PS
</td>
</tr>
```

```

<tr>

<td>

<label>Euro Standardi</label>

</td>

<td>

<select name="cmbEuroStandardi" style="width:175px;">

<option value=""></option>

<option value="JoDefinuar">Sdi Qka osht ky Standard</option>

</select>

</td>

<td><label>Ana e Timonit</label></td>

<td style=" color:rgb(136,132,132);">

<select name="cmbAnaTimonit" style="width:175px;" >

<option value=""></option>

<option value="Majte">Majte</option>

<option value="Djathte">Djathte</option>

</select>

</td>

</tr>


<tr>

<td>

<label>Nr. i Dyeerve</label>

</td>

```

```

<td>

<select name="cmbNrDyerve" style="width:175px;">

<option value=""></option>

<option value="2+1">2+1</option>

<option value="3+1">3+1</option>

<option value="4+1">4+1</option>

</select>

</td>

<td><label>Nr. i Ulseve</label></td>

<td style=" color:rgb(136,132,132);">

<select name="cmbNrUlseve" style="width:175px;" >

<option value=""></option>

<option value="2">2</option>

<option value="3">3</option>

<option value="4">4</option>

<option value="5">5</option>

<option value="6">6</option>

<option value="7">7</option>

</select>

</td>

</tr>

<tr>

<td>

<label>Klima</label>

```

</td>

<td>

<select name="cmbKlima" style="width:175px;">

<option value=""></option>

<option value="Po">Po</option>

<option value="Jo">Jo</option>

</select>

</td>

<td><label></label></td>

<td style=" color:rgb(136,132,132);">

<select name="" style="width:175px;" >

<option value=""></option>

</select>

</td>

</tr>

<tr>

<td>

<label>Matriali i Enterierit</label>

</td>

<td>

<select name="cmbMatrialiEnterierit" style="width:175px;">

<option value=""></option>

<option value="Lekure">Lekure</option>

<option value="Pamuk">Pamuk</option>

```

</select>

</td>

<td><label>Ngjyra e Enterierit</label></td>

<td style=" color:rgb(136,132,132);">

<select name="cmbNgjyraEnterierit" style="width:175px;" >

<option value=""></option>

<option value="Zeze">Zezë</option>

<option value="Kuqe">Kuqe</option>

<option value="Kalter">Kaltër</option>

</select>

</td>

</tr>


<tr>

<td>

<label>i Regjistruar</label>

</td>

<td>

<select name="cmbRegjistrimi" style="width:175px;">

<option value=""></option>

<option value="Po">Po</option>

<option value="Jo">Jo</option>

</select>

</td>

<td><label>i Doganuar</label></td>

```

```

<td style=" color:rgb(136,132,132);">
<select name="cmbDoganuar" style="width:175px;" >
<option value=""></option>
<option value="Po">Po</option>
<option value="Jo">Jo</option>
</select>
</td>
</tr>

<tr>
<td>
<label>Origina vetures</label>
</td>
<td>
<select name="cmbOriginaVetures" style="width:175px;">
<option value=""></option>
<option value="Kosove">Kosove</option>
<option value="Importuar">Importuar</option>
</select>
</td>
<td><label>Demptimi</label></td>
<td style=" color:rgb(136,132,132);">
<select name="cmbDemptimi" style="width:175px;" >
<option value=""></option>
<option value="Po">Po</option>

```

<option value="Jo">Jo</option>

| <tr> |
 **Qmimi** | ☐ a. I Padiskutueshëm ☐ I Padiskutueshëm |

☐ b. I Diskutueshëm

<label>c. Me  
ndrrim&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&  
    <input name="cbxQmimiNdririm" type="checkbox" value="Me ndrrim"/></label>

  |  |

```
<textarea name="txareaPershkrimiDemtimit" placeholder="Pershkrimi i Demtimit" cols="2"
rows="2" style="width:175px;">
```

&lt;/textarea&gt;



<!--</details>-->

</fieldset>

<!--\*\*\*\*PAISJE E

SIGURISE\*\*\*\*\*

\*\*\*-->

<fieldset style="border: 2px groove threedface;padding:10px; margin:5px 5px;">

<legend style="color: #C0C210;font-size: larger;;">Paisjet e sigurise</legend>

<table>

<tr>

<td>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</td>

<td>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</td>

<td>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</td>

<td>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</td>

<td>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</td>

<td >

<label>Airbag</label>

</td>

<td>

<input type="checkbox" name="cbxAirbag" value="Airbag"/>

</td>

<td >

<label>Child Lock</label>

|☐| <tr> |
[illegible][illegible][illegible][illegible][illegible]  |

<label>ABS</label>

  |☐  |

&lt;label&gt;ESP&lt;/label&gt;

  |☐

[illegible]

[illegible] <label>Mbyllje Elektronike</label></td> |

&lt;/fieldset&gt;

```
*****AKSESORET*****
*****_-->*****
```

<legend style="color: #C0C210;font-size: larger; ">Aksesoret</legend>

|  | <tr> |
 ☐ | ☐</td> | ☐ | ☐ |

</tr>

<tr>

<td><label>Tempomat</label></td>

<td><input type="checkbox" name="cbxTempomat" value="Tempomat" /></td>

<td><label>Shiber</label></td>

<td><input type="checkbox" name="cbxShiber" value="Shiber" /></td>

<td><label>Navigacion</label></td>

<td><input type="checkbox" name="cbxNavigacion" value="Navigacion" /></td>

<td><label>Disqet e Aluminit</label></td>

<td><input type="checkbox" name="cbxDisqetAluminit" value="Disqet e Aluminit" /></td>

</tr>

<tr>

<td><label>Kulmi Panoramik</label></td>

<td><input type="checkbox" name="cbxKulmiPanoramik" value="Kulmi Panoramik" /></td>

<td><label>Dritaret Elektronike</label></td>

<td><input type="checkbox" name="cbxDritaretElektronike" value="Dritaret Elektronike" /></td>

<td><label>Dritat e Mjegulles</label></td>

<td><input type="checkbox" name="cbxDritatMjegulles" value="Dritat e Mjegulles" /></td>

<td><label>Xenon</label></td>

<td><input type="checkbox" name="cbxXenon" value="Xenon" /></td>

</tr>

```
<tr>
<td><label>Pasqyrat me Nxemje</label></td>
<td><input type="checkbox" name="cbxPasqyratNxemje" value="Pasqyrat me Nxemje" /></td>
<td><label>Pasqyret Elektronike</label></td>
<td><input type="checkbox" name="cbxPasqyretElektronike" value="Pasqyret Elektronike"
/></td>
<td><label>Sensor per Drita</label></td>
<td><input type="checkbox" name="cbxSensorDrita" value="Sensor per Drita" /></td>
<td><label>Sensor per Shi</label></td>
<td><input type="checkbox" name="cbxSensorShi" value="Sensor per Shi" /></td>
</tr>
```

```
<tr>
<td><label>Ulset Elektronike</label></td>
<td><input type="checkbox" name="cbxUlsetElektronike" value="Ulset Elektronike" /></td>
<td><label>Ulset me Nxemje</label></td>
<td><input type="checkbox" name="cbxUlsetNxemje" value="Ulset me Nxemje" /></td>
<td><label>Radio/CD</label></td>
<td><input type="checkbox" name="cbxRadioCD" value="Radio CD" /></td>
<td><label>CD Changer</label></td>
<td><input type="checkbox" name="cbxCDChanger" value="CD Changer" /></td>
</tr>
```

&lt;/fieldset&gt;

<!--\*\*\*\*\*PERSHKRIMI

SHTSE\*\*\*\*\*->

```
<fieldset style="border: 2px groove threedface;padding:10px; margin:5px 5px;">
```

<legend style="color: #C0C210;font-size: larger;;">Perskrim shtese i vetures</legend>

| <tr> |
[illegible][illegible][illegible][illegible][illegible]  |

<textarea name="PerskrimShteseVetures" placeholder="Perskrimi" cols="2"  
rows="5" style="width:350px;">

&lt;/textarea&gt;

&lt;/fieldset&gt;

```
<!--
*****FOTOGRAFITE*****
*****-->
```

```
<fieldset style="border: 2px groove threedface;padding:10px; margin:5px 5px;">
```

```
<legend style="color: #C0C210;font-size: larger;;">Fotografite</legend>
```

```
<label>Foto e Kopertines</label><br>
```

```
<table>
```

```
<tr>
```

```
<td><div id="a1" style="border: 2px inset #8882E5; width:250px;height:25px;">
```

```
<input type="file" name="fotoKopertines" text="blla"></div></td>
```

```
<td>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</td>
```

```
<td><div id="a2" style="border: 2px inset #8882E5; width:250px;height:25px;">
```

```
<input type="file" name="foto2" text="blla"></div></td>
```

```
<td>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</td>
```

```
<td><div id="a3" style="border: 2px inset #8882E5; width:250px;height:25px;">
```

```
<input type="file" name="foto3" text="blla"></div></td>
```

```
</tr>
```

```
</table>
```

```
<br>
```

```
<details>
```

```
<summary>Me shume foto - Opsionale</summary>
```

```
<br>
```

```
<table>
```

```
<tr>
```

```
<td><div id="a4" style="border: 2px inset #8882E5; width:250px;height:25px;">
```



```

<input type="file" name="foto4" text="blla"></div></td>
<td>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</td>
<td><div id="a5" style="border: 2px inset #8882E5; width:250px;height:25px;">
  <input type="file" name="foto5" text="blla"></div></td>
<td>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</td>
<td><div id="a6" style="border: 2px inset #8882E5; width:250px;height:25px;">
  <input type="file" name="foto6" text="blla"></div></td>
</tr>

<tr>
<td><div id="a7" style="border: 2px inset #8882E5; width:250px;height:25px;">
  <input type="file" name="foto7" text="blla"></div></td>
<td>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</td>
<td><div id="a8" style="border: 2px inset #8882E5; width:250px;height:25px;">
  <input type="file" name="foto8" text="blla"></div></td>
<td>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</td>
<td><div id="a9" style="border: 2px inset #8882E5; width:250px;height:25px;">
  <input type="file" name="foto9" text="blla"></div></td>
</tr>

<tr>
<td><div id="a10" style="border: 2px inset #8882E5; width:250px;height:25px;">
  <input type="file" name="foto10" text="blla"></div></td>
<td>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</td>
<td><div id="a11" style="border: 2px inset #8882E5; width:250px;height:25px;">

```

```

<input type="file" name="foto11" text="blla"></div></td>
<td>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</td>
<td><div id="a12" style="border: 2px inset #8882E5; width:250px;height:25px;">
  <input type="file" name="foto12" text="blla"></div></td>
</tr>

<tr>
<td><div id="a13" style="border: 2px inset #8882E5; width:250px;height:25px;">
  <input type="file" name="foto1" text="blla"></div></td>
<td>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</td>
<td><div id="a14" style="border: 2px inset #8882E5; width:250px;height:25px;">
  <input type="file" name="foto1" text="blla"></div></td>
<td>&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;&nbsp;</td>
<td><div id="a15" style="border: 2px inset #8882E5; width:250px;height:25px;">
  <input type="file" name="foto1" text="blla"></div></td>
</tr>

</table>

</details>

<br>

</fieldset>

<input type="submit" value="Dërgo Kërkesën" style=" width:150px; height:50px; margin:0px
300px; "/>

</form>

```

<br>

</div>

</body>

</html>

<?php

include 'footer.php';

?>

<!--

CREATE TABLE `tblvetura` (

`ID` int(11) NOT NULL AUTO\_INCREMENT,

`LlojiVetures` varchar(50) NOT NULL,  
`ModeliVetures` varchar(50) NOT NULL,  
`Karburanti` varchar(50) NOT NULL,  
`Marshi` varchar(50) NOT NULL,  
`Kilometrat` varchar(50) NOT NULL,  
`Qmimi` varchar(50) NOT NULL,  
`Viti` varchar(50) NOT NULL,  
`Ngjyra` varchar(50) NOT NULL,

`Kubikazha` varchar(50) ,  
`Fuqia` varchar(50) ,  
`EuroStandardi` varchar(50) ,  
`AnaTimonit` varchar(50) ,  
`NrDyerve` varchar(50) ,  
`NrUlseve` varchar(50) ,  
`Klima` varchar(50) ,  
`MatrialiEnterierit` varchar(50) ,  
`NgjyraEnterierit` varchar(50) ,  
`Regjistrimi` varchar(50) ,  
`Doganuar` varchar(50) ,  
`OrigjinaVetures` varchar(50) ,  
`Dentimi` varchar(50) ,  
`QmimiPaDisk` varchar(50) ,  
`QmimiDisk` varchar(50) ,  
`QmimiNdrim` varchar(50) ,

`PershkrimiDemtimit` varchar(200) ,

`Airbag` varchar(20) ,

`ChildLock` varchar(50) ,

`ABS` varchar(20) ,

`ESP` varchar(20) ,

`ASR` varchar(20) ,

`Alarm` varchar(20) ,

`MbylljeElektronike` varchar(50) ,

`TimoniHidraulik` varchar(50) ,

`TimoniMultifunksional` varchar(50) ,

`SensorParking` varchar(50) ,

`NdhmeParkimi` varchar(50) ,

`Tempomat` varchar(50) ,

`Shiber` varchar(50) ,

`Navigacion` varchar(50) ,

`DisqetAlumini` varchar(50) ,

`KulmiPanoramik` varchar(50) ,

`DritaretElektronike` varchar(50) ,

`DritatMjegulles` varchar(50) ,

`Xenon` varchar(50) ,

`PasqyratNxemje` varchar(50) ,

`PasqyretElektronike` varchar(50) ,

`SensorDrita` varchar(50) ,

`SensorShi` varchar(50) ,

`UlsetElektronike` varchar(50) ,

`UlsetNxemje` varchar(50) ,

`RadioCD` varchar(50) ,

`CDChanger` varchar(50) ,

`PerskrimShteseVetures` varchar(200) ,

`FotoKopertines` longblob NOT NULL,

`Foto2` longblob NOT NULL,

`Foto3` longblob NOT NULL,

PRIMARY KEY (`ID`)

)

-->

=====

AUTO TRENTI- FORMA SHTO VETURA

=====