




## **Table of Contents**


- ► What is Docker?
- ► What is Container?
- Docker vs. VMs
- Docker Architecture
- Terminology
- Images and Containers



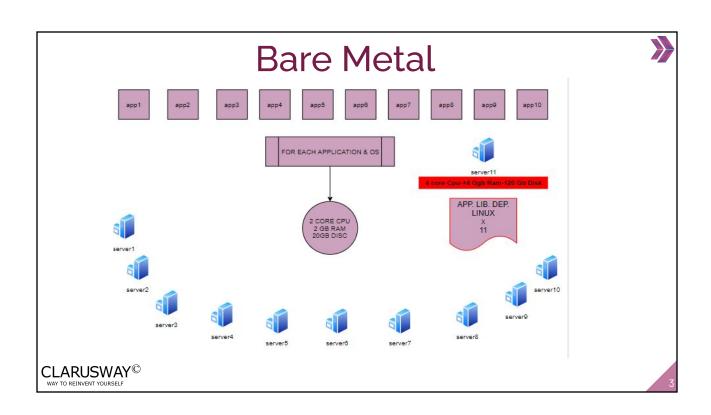

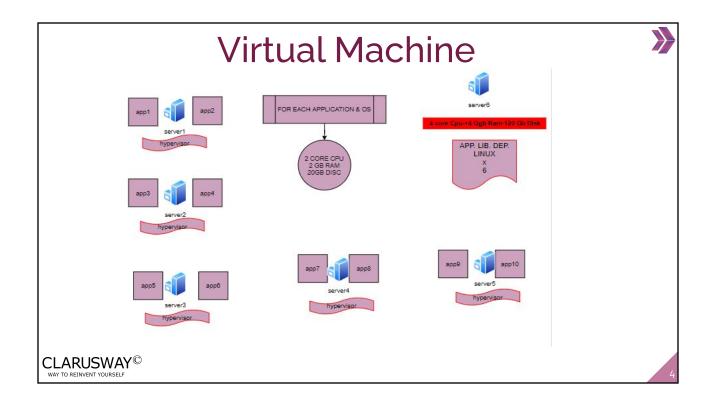

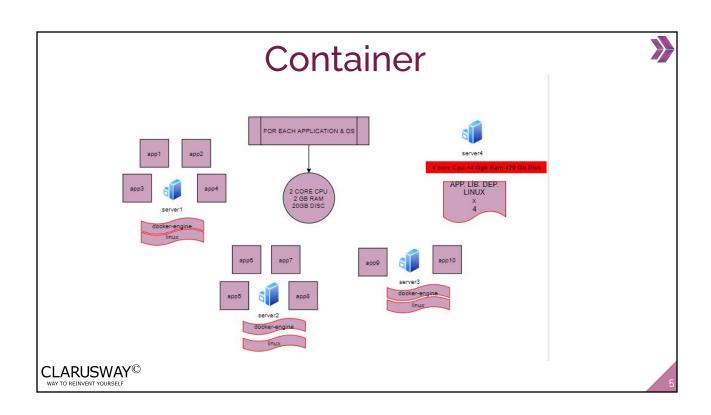

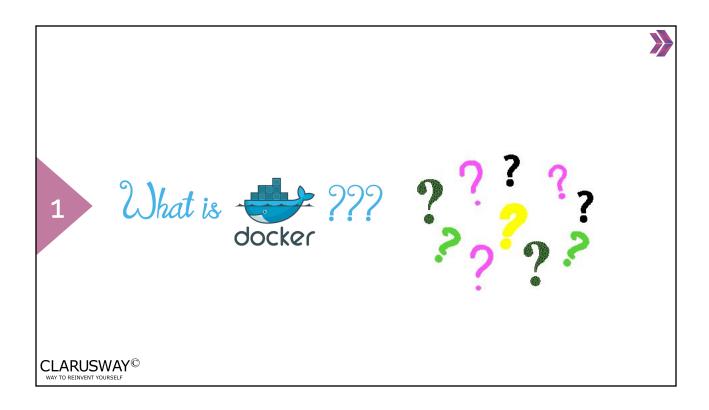

## What is Docker?



"DOCKER" refers to several things. This includes an open-source community project which started in 2013; tools from the open-source project; Docker Inc., the company that is the primary supporter of that project; and the tools that the company formally supports.

- Docker as a "Company"
- Docker as a "Product"
- Docker as a "Platform"
- Docker as a "CLI Tool"
- Docker as a "Computer Program"









WAY TO REINVENT YOURSELF

What is Container?



### What is Container?

Imagine you're developing an python application. In order to do so you will setup an environment with python installed in it. You do your work on a laptop and your environment has a specific configuration. The application you're developing relies on that configuration and is dependent on specific libraries, dependencies, and files.


Once the application is developed, it needs to be tested by the tester. Now the tester will again set up same environment.

Once the application testing is done, it will be deployed on the production server. Again the production needs an environment with libraries, dependencies, files and python installed on it.


How do you make your app work across these environments, pass quality assurance, and get your app deployed without massive headaches, rewriting, and break-fixing?





What is Container?

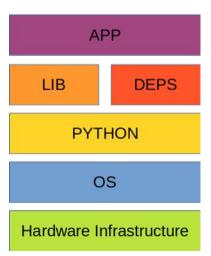




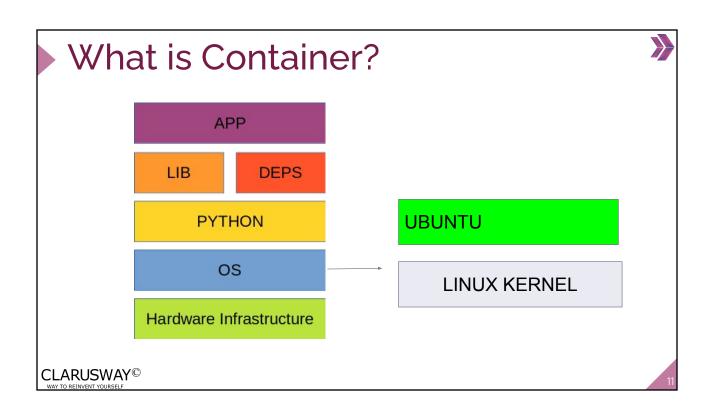

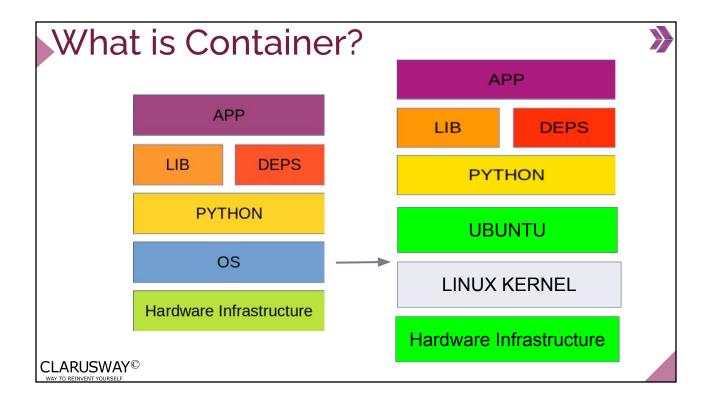

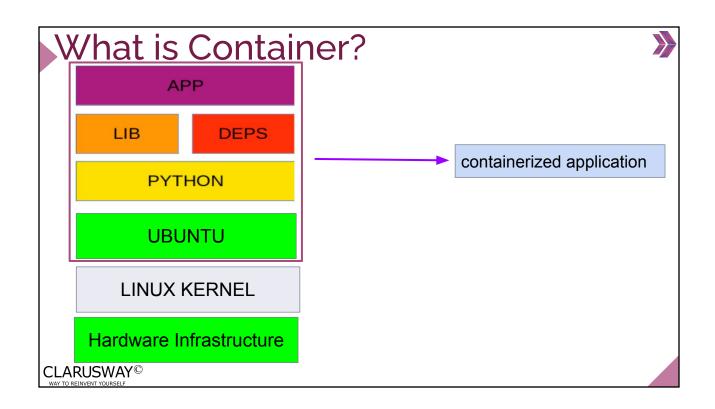

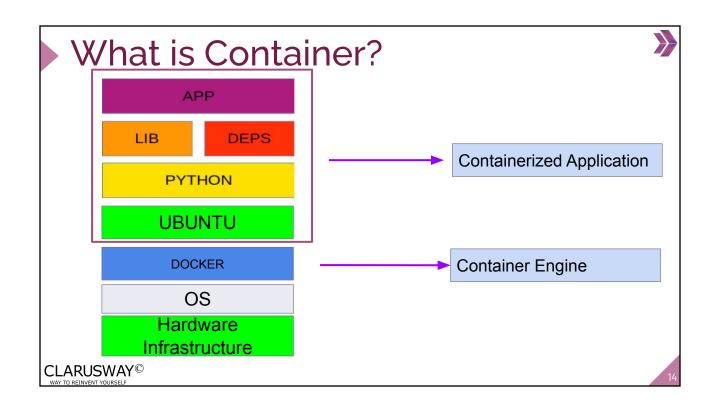


## What is Container?



A **container** is a standard unit of software that packages up code and all its dependencies so the application runs quickly and reliably from one computing environment to another.

**Containerized Applications** 

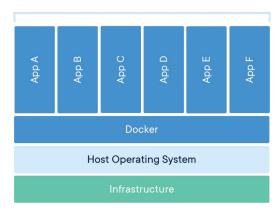

CLARUSWAY®

1!


Docker vs. VMs



### Docker vs. VMs

A virtual machine (VM) is software that runs programs or applications without being tied to a physical machine.

Virtual Machines are built over the physical hardware, there is a hypervisor layer which sits between physical hardware and operating systems.

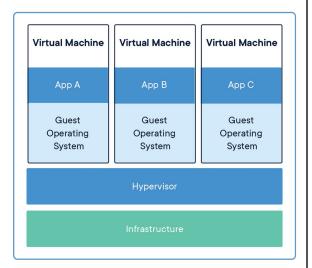




11


## Docker vs. VMs



Unlike virtual machines where hypervisor divides physical hardware into parts, Containers are like normal operating system processes.

A virtual machine (VM) virtualize the hardware. But the containers virtualize the operating system.







18

## Docker vs. VMs

#### **Virtual Machine**



#### **Containers**





Docker containers are executed with the Docker engine rather than the hypervisor. Containers are therefore smaller than Virtual Machines and enable faster startup with better performance, less isolation and greater compatibility possible due to sharing of the host's kernel. Hence, it looks very similar to the residential flats system where we share resources of the building.



£

## Docker vs. VMs

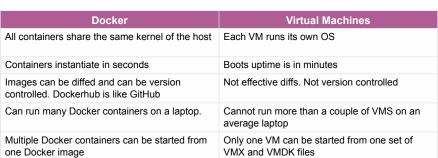








4

### **Docker Architecture**



## **Docker Architecture**

Docker uses a client-server architecture. The Docker client talks to the Docker daemon, which does the heavy lifting of building, running, and distributing your Docker containers. The Docker client and daemon can run on the same system, or you can connect a Docker client to a remote Docker daemon. The Docker client and daemon communicate using a REST API, over UNIX sockets or a network interface.

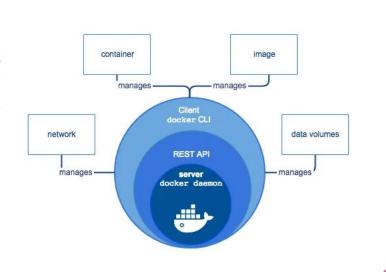

CLARUSWAY®



Terminology



## Terminology



- •Docker Community Edition (CE) is ideal for Developers who are looking for experimenting with docker and creating container-based applications. It's free.
- •Docker Enterprise Edition (EE) is a Containers-as-a-Service (CaaS) platform. Enterprise Edition Subscription packages include an integrated Docker platform and tooling for container management and security.









## **Terminology**

#### Registry

- •A Docker registry stores Docker images.
- •Docker Hub (Like GitHub) is a cloud-based registry service that allows you to link to code repositories, build your images and test them, stores manually pushed images, and links to Docker Cloud so you can deploy images to your hosts.
- •Docker Cloud uses the hosted Docker Cloud Registry, which allows you to publish Dockerized images on the internet either publicly or privately. Docker Cloud can also store pre-built images, or link to your source code so it can build the code into Docker images, and optionally test the resulting images before pushing them to a repository.







25

# Images and Containers




6

## **Images and Containers**

- ☐ An image is a read-only template with instructions for creating a Docker container.
- ☐ A container is a runnable instance of an image.



CLARUSWAY<sup>©</sup>

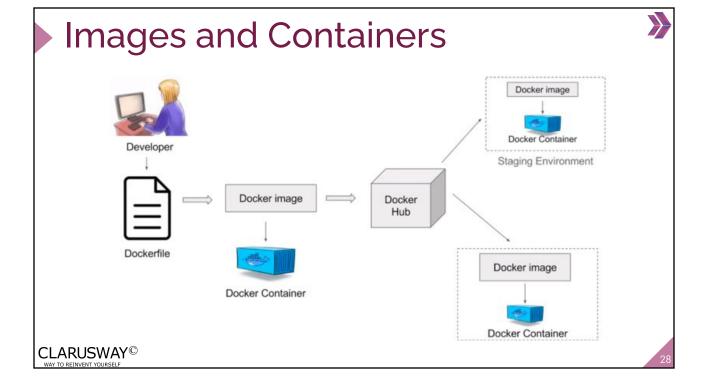

3


## docker run command



## docker run command



docker run command is used to create a container. The docker run command provides all of the "launch" capabilities for Docker.

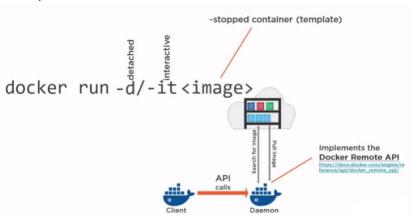



## docker run command



\$ docker run -i -t ubuntu /bin/bash

When we run this command, the following happens.

- If you do not have the ubuntu image locally, Docker pulls it from your configured registry, as though you had run docker pull ubuntu manually.
- Docker creates a new container, as though you had run a docker container create command manually.
- □ Docker starts the container and executes /bin/bash. Because the container is running interactively and attached to your terminal (due to the -i and -t flags), you can provide input using your keyboard while the output is logged to your terminal.
- ☐ When you type exit to terminate the /bin/bash command, the container stops but is not removed. You can start it again or remove it.





3

# Starting a stopped container



4

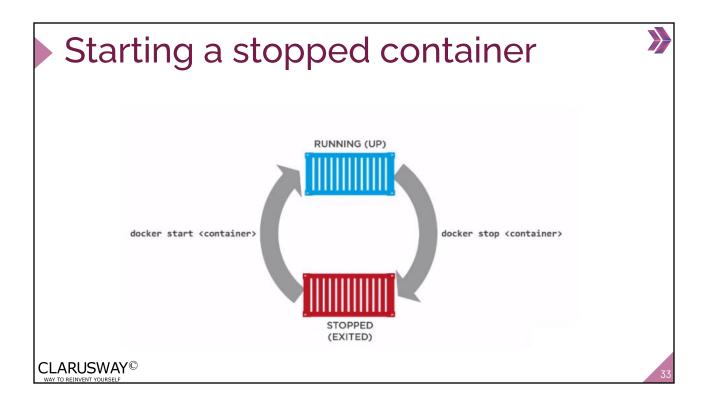

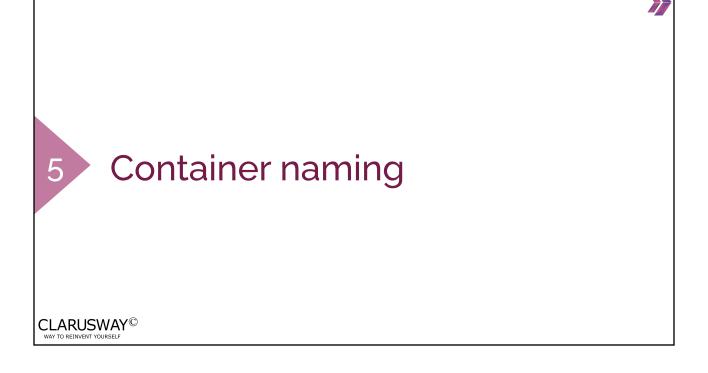

## Container naming



\$ sudo docker run --name clarusway -i -t ubuntu /bin/bash

- □ Docker will automatically generate a name at random for each container we create.
- ☐ If we want to specify a particular container name in place of the automatically generated name, we can do so using the --name flag.



. द्रा

docker container Commands





Command	Description
docker container attach	Attach local standard input, output, and error streams to a running container
docker container create	Create a new container
docker container exec	Run a command in a running container
docker container inspect	Display detailed information on one or more containers
docker container Is	List containers
docker container prune	Remove all stopped containers
docker container rename	Rename a container
docker container rm	Remove one or more containers

CLARUSWAY®

์ เรา

