



Kubernetes Networking



CLARUSWAY©

Students, write your response!

Pear Deck Interactive Slide
Do not remove this bar

Table of Contents



- ▶ Cluster Networking
- ▶ Services
- ▶ Service Types
- ▶ Labels and loose coupling




1

Cluster Networking

CLARUSWAY©
WAY TO REINVENT YOURSELF

Cluster Networking

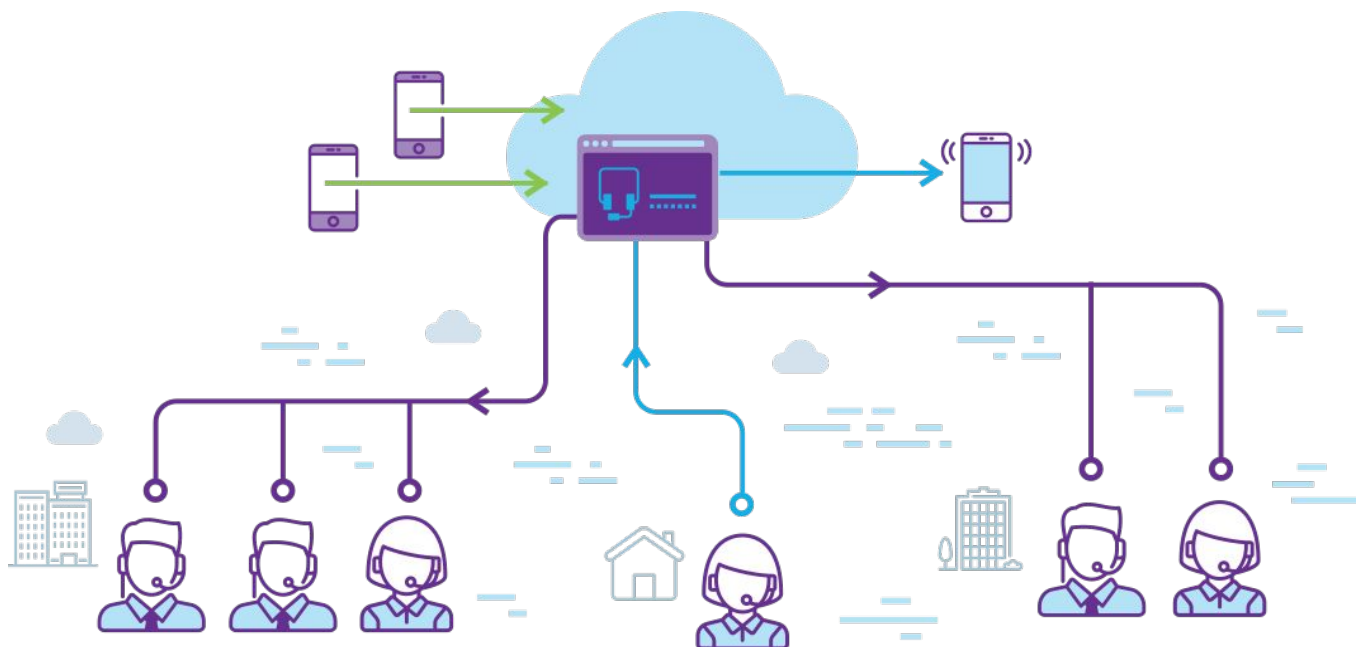

CLARUSWAY©
WAY TO REINVENT YOURSELF


Cluster Networking

There are 4 distinct networking problems to address:

1. container-to-container communications:
2. Pod-to-Pod communications:
3. Pod-to-Service communications: this is covered by services.
4. External-to-Service communications: this is covered by services.

2


Services

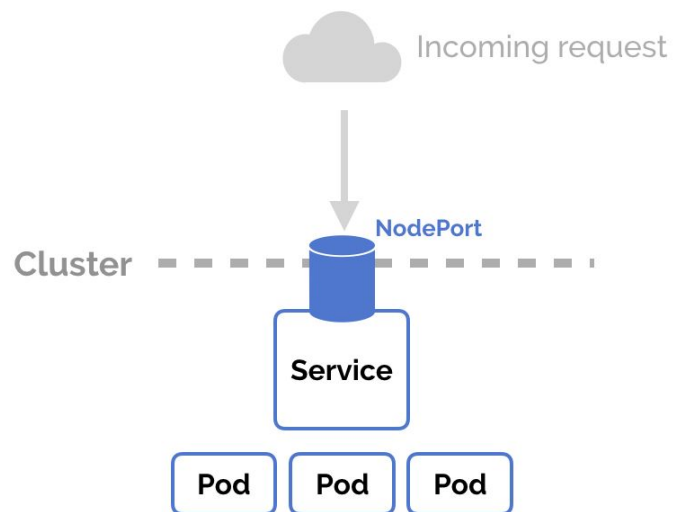

Services




Pods are not reliable

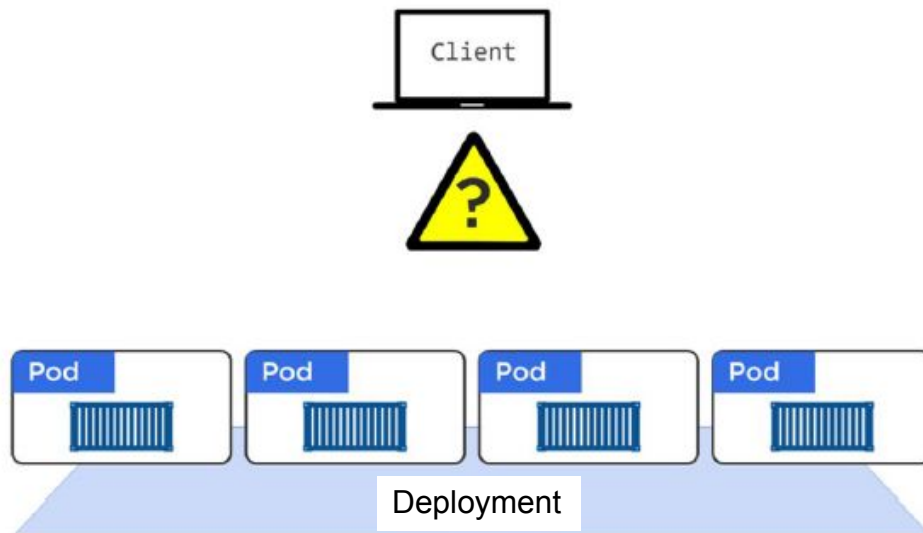

Services



A **Service** offers a single **DNS entry** for a containerized application managed by the Kubernetes cluster


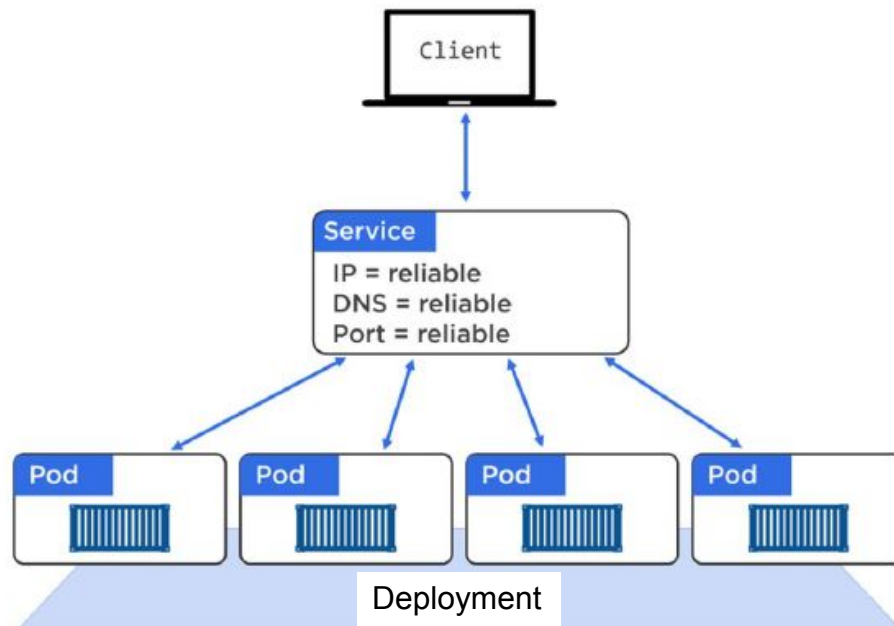



Services

The **Service** is associated with the Pods, and provides them with a stable IP, DNS and port. It also **loadbalances** requests across the Pods.

Service logically groups Pods and defines a policy to access them.


This grouping is achieved via **Labels** and **Selectors**.

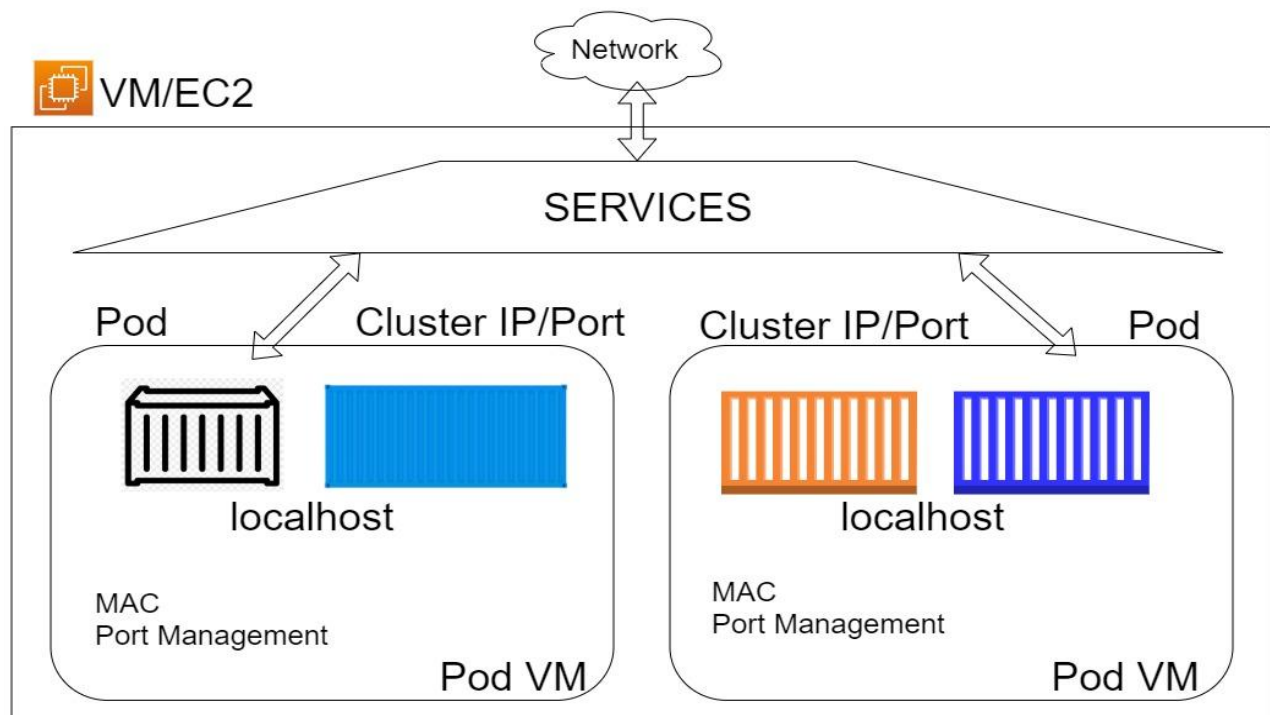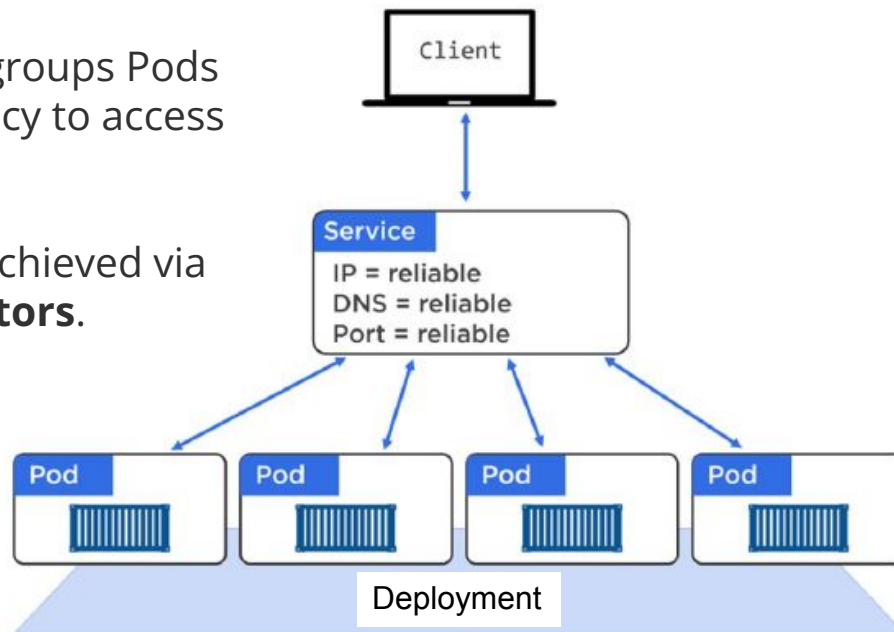

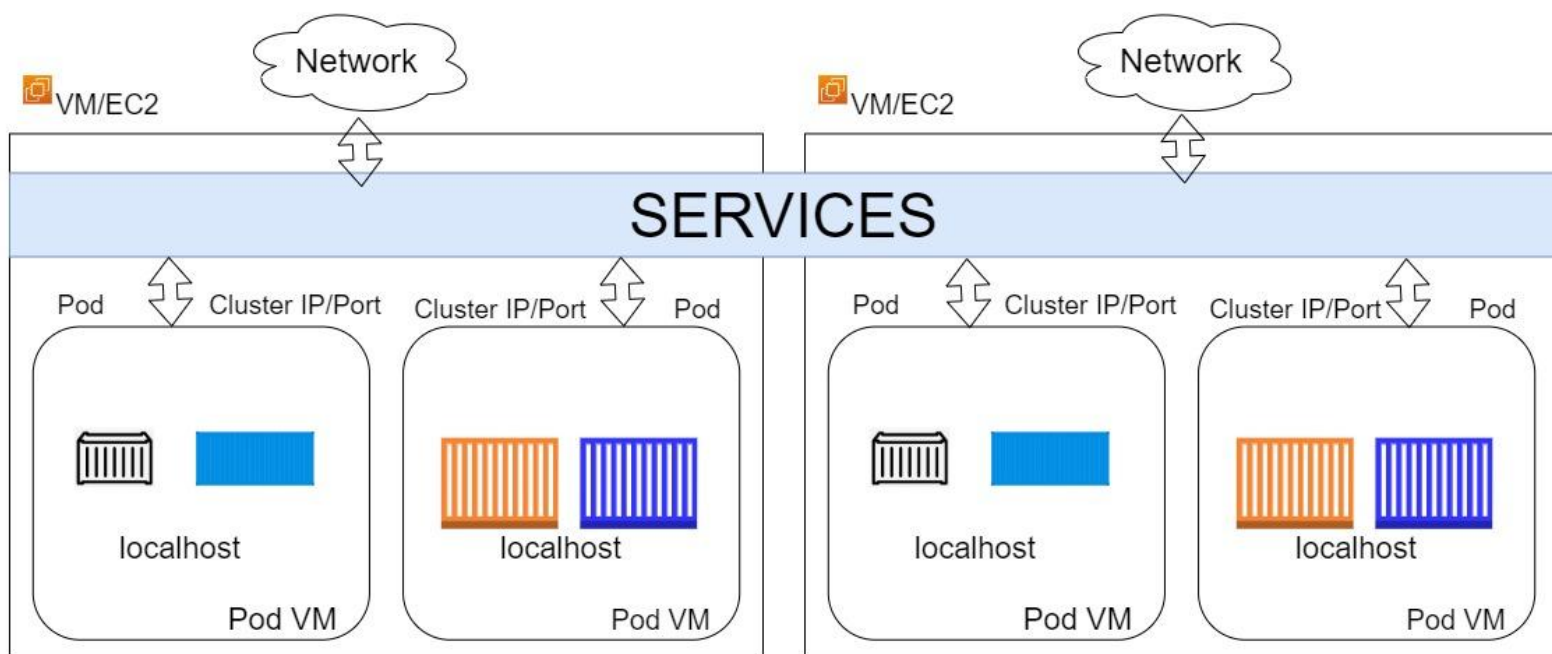

K8s Network

K8s Cluster

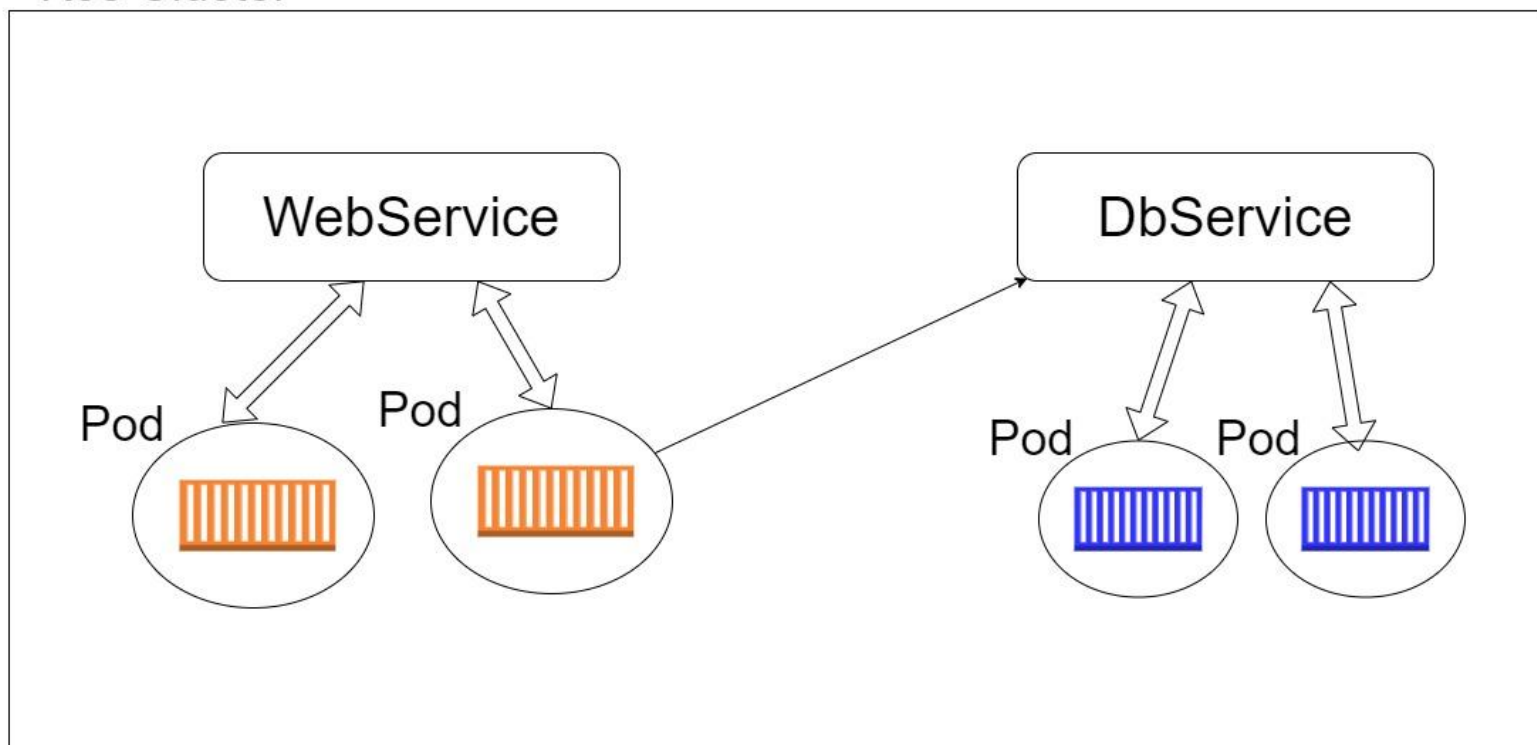


Services

Kubernetes **Services** enable communication between various components **within** and **outside** of the application. Kubernetes Services helps us connect applications together with other applications or users.

Kubernetes Service

A service allows you to dynamically access a group of replica pods.

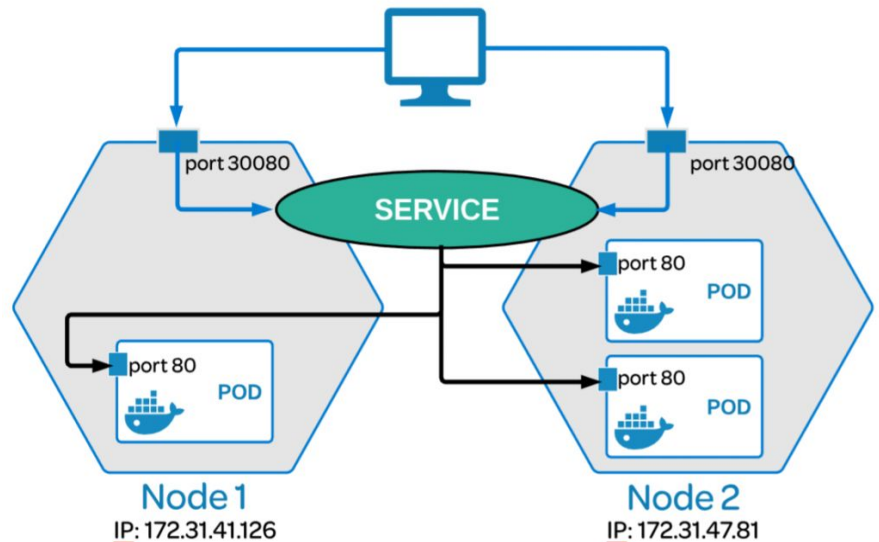


kube-proxy

- Each cluster node runs a daemon called **kube-proxy**
- **kube-proxy** is responsible for **implementing the Service configuration** on behalf of an administrator or developer
- For each new Service, on each node, **kube-proxy** configures **iptables** rules to capture the traffic for its **ClusterIP** and forwards it to one of the Service's endpoints.
- When the Service is removed, **kube-proxy** removes the corresponding **iptables** rules on all nodes as well.

Service Discovery



- Kubernetes has an add-on for **DNS**, which creates a DNS record for each Service and its format is

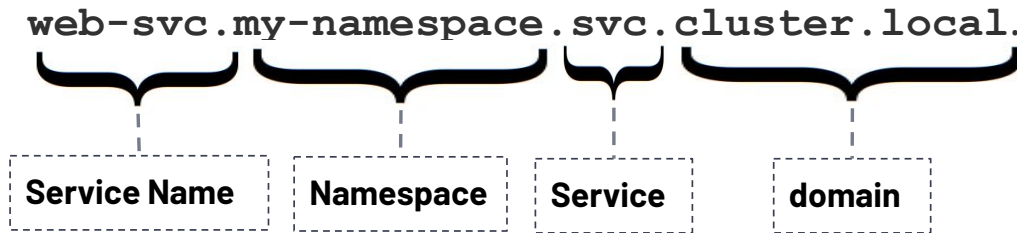


- Services within the same Namespace find other Services just by their names.
- If we add a Service **redis-master** in **my-ns** Namespace, all Pods in the same **my-ns** Namespace lookup the Service just by its name, **redis-master**.


FQDN: fully qualified domain name



my-ns

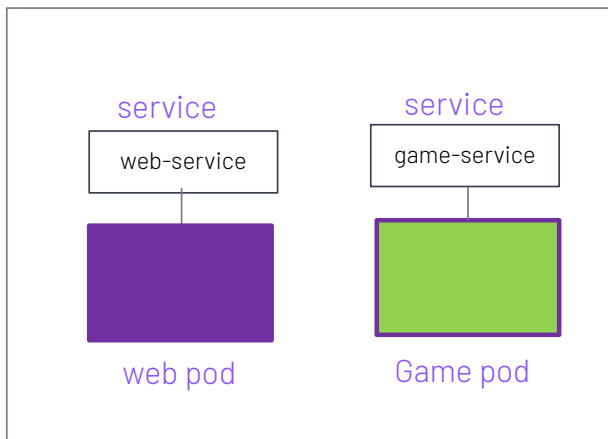

test-ns

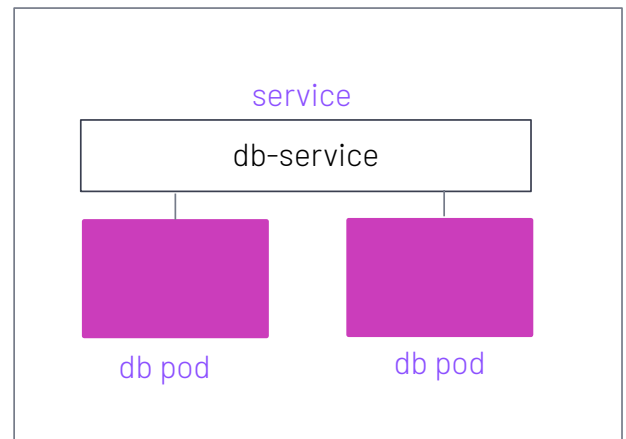

To connect to the "Game pod" and "db pod":

From "web pod" -> "Game pod" --> hostname: `game-service.my-ns:port`
`game-service:port`

From "web pod" -> "db pod" --> hostname: `db-service.test-ns.svc.cluster.local:port`




3 Service Types

Service Types




There are 4 major service types:

- ClusterIP (default)
- NodePort
- LoadBalancer
- ExternalName

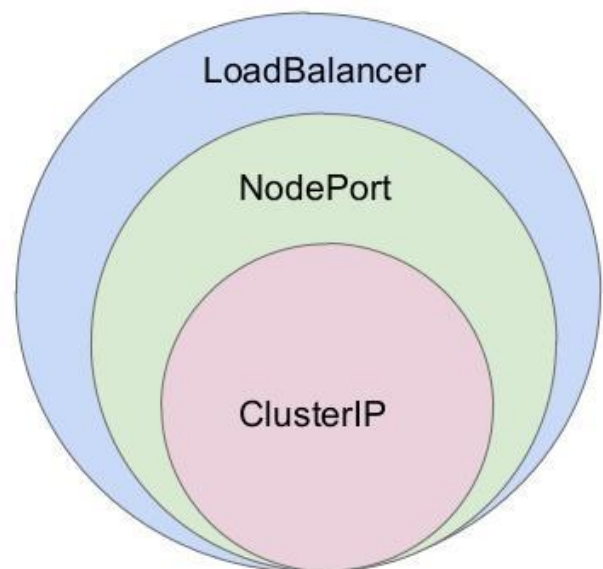

Service Types

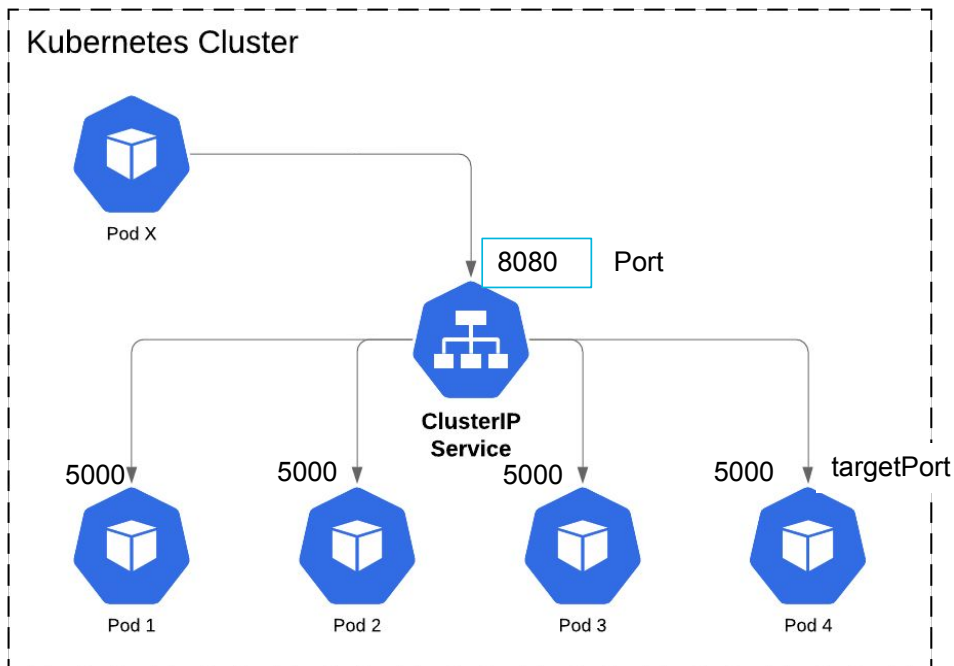


ClusterIP:
Expose traffic internally

Example Usecase:


Good for service of database & back-end apps.

```
apiVersion: v1
kind: Service
metadata:
  name: back-end-svc
  labels:
    app: back-end
spec:
  type: ClusterIP (default)
  selector:
    app: back-end
  ports:
    - port: 8080
      protocol: TCP
      targetPort: 5000
```

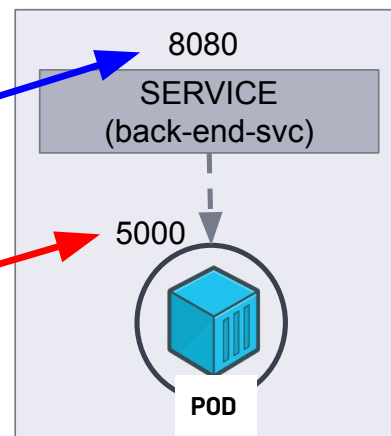

Worker Node-1

Service Types

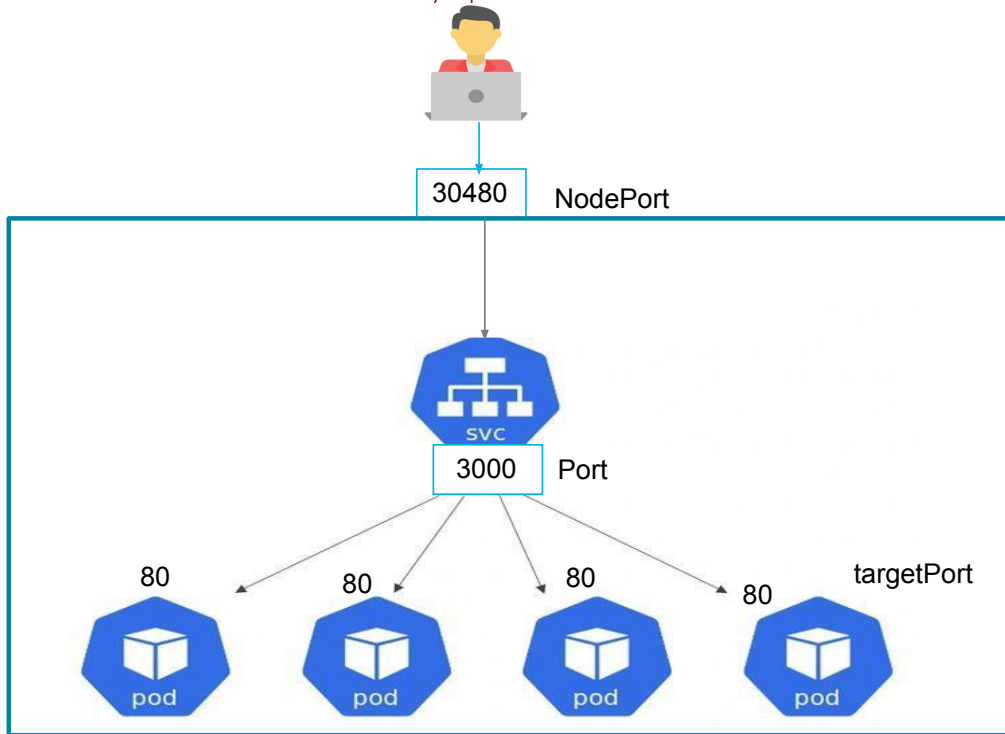


NodePort:

Exposes traffic to the outside.

Example Use Case:


when we want to make our Services which has our app or website accessible from the external world.

```
apiVersion: v1
kind: Service
metadata:
  name: web-flask-svc
  labels:
    app: web-flask
spec:
  type: NodePort
  selector:
    app: web-flask
  ports:
    - nodePort: 30480
      port: 3000
      protocol: TCP
      targetPort: 5000
```

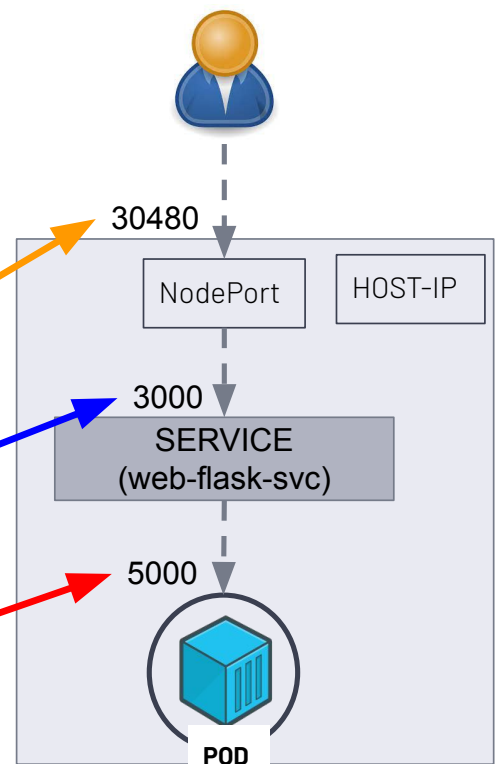

Worker Node-1

Service Types

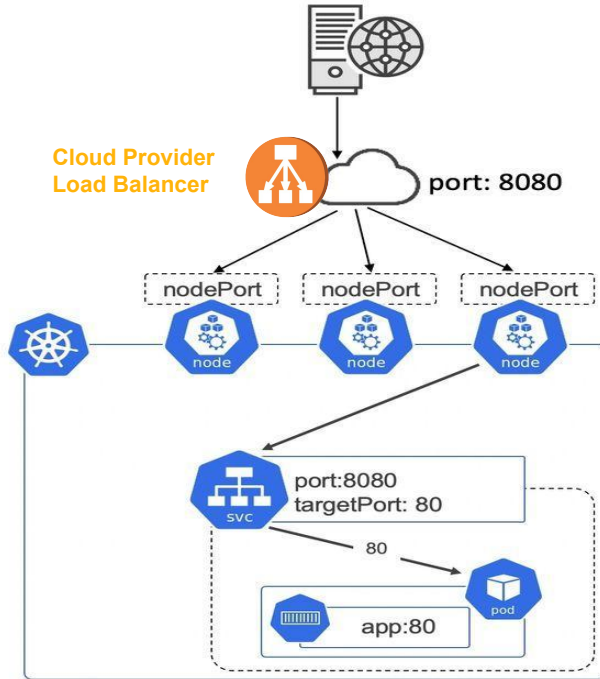


LoadBalancer:

Exposes traffic outside with load balancing feature.

Example Use Case:

when we want to load balance our Services which has our app or website accessible from the external world.

```
apiVersion: v1
kind: Service
metadata:
  name: web-flask-svc
  labels:
    app: web-flask
spec:
  type: LoadBalancer
  selector:
    app: web-flask
  ports:
    - port: 3000
      protocol: TCP
      targetPort: 5000
```

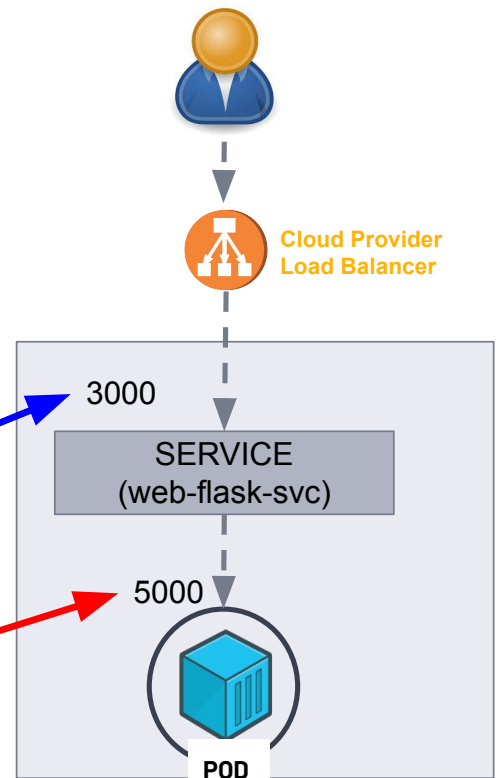

Worker Node-1


Service Types



LoadBalancer:

- The **LoadBalancer** *ServiceType* will only work if the underlying infrastructure supports the automatic creation of Load Balancers and have the respective support in Kubernetes, as is the case with the Google Cloud Platform, Azure or AWS.
- If no such feature is configured, the **LoadBalancer IP** address field is **not populated**, it remains in **Pending** state, but the **Service will still work as a typical NodePort type Service**.

Service Types

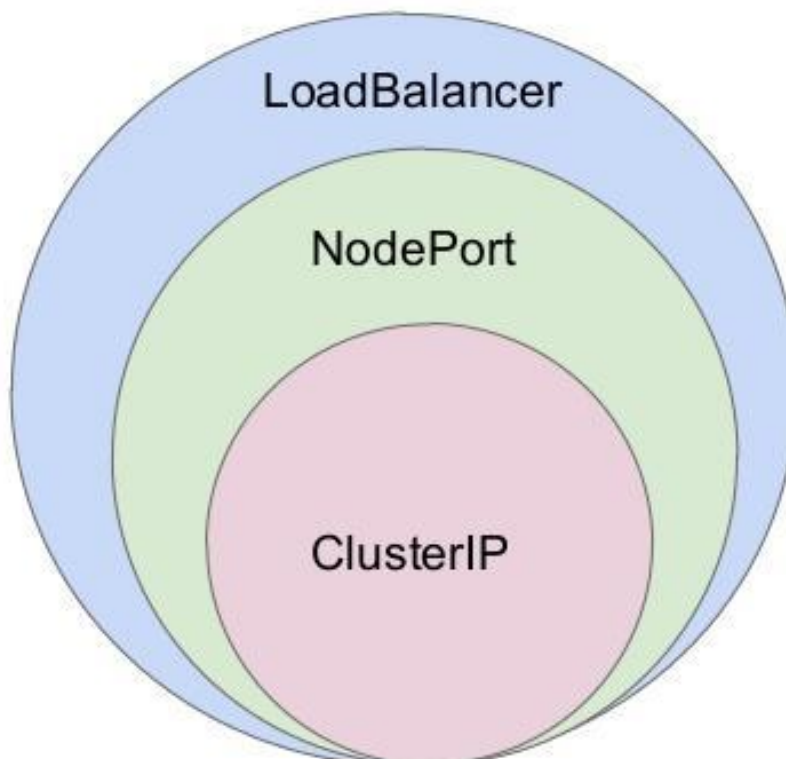

Service Types



ExternalName:

Maps the Service to the contents of the ExternalName field (e.g. example.com), by returning a CNAME record with its value.

Example Use Cases:

to make externally configured services like;

remote.server.url.com

available to applications inside the cluster.

Service Types



```
apiVersion: v1
kind: Service
metadata:
  labels: io.kompose.service: mysql-server
  name: mysql-server
spec:
  type: ExternalName
  externalName: serdar.cbanmzptkrzf.us-east-1.rds.amazonaws.com
```



4

Labels and loose coupling


Labels and loose coupling



- Labels and Selectors use a **key/value** pair format.
- Pods and Services are loosely coupled via labels and label selectors.
- For a Service to match a set of Pods, and therefore provide stable networking and load-balance, it only needs to match some of the Pods labels.
- However, for a Pod to match a Service, the Pod must match all of the values in the Service's label selector.

Labels and loose coupling


The figure below shows an example where 3 Pods are labeled as **zone=prod** and **version=v1**, and the Service has a label selector that matches. This Service provides stable networking to all three Pods. It also provides simple load-balancing.

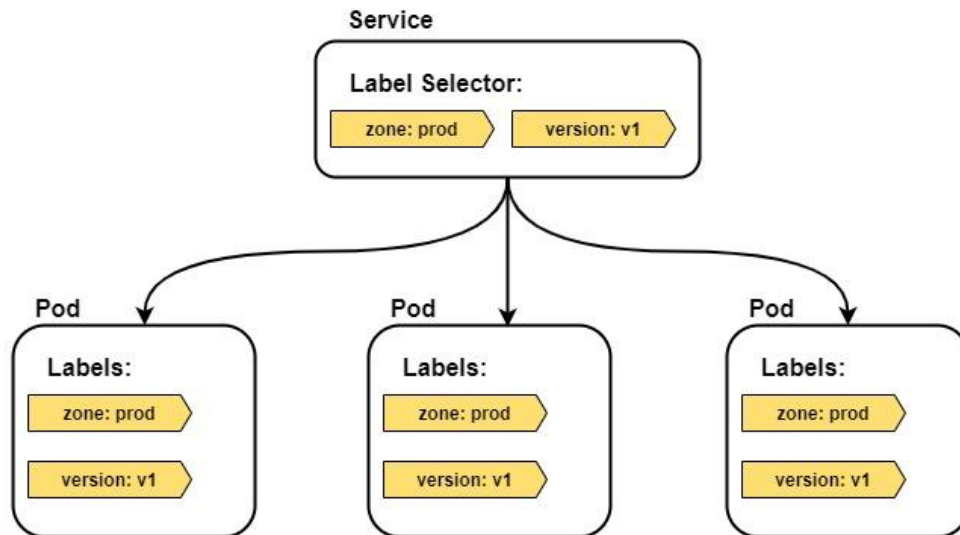

31


Labels and loose coupling

The figure below shows an example where the Service does not match any of the Pods. This is because the Service is selecting on two labels, but the Pods only have one of them. The logic behind this is a Boolean AND operation.

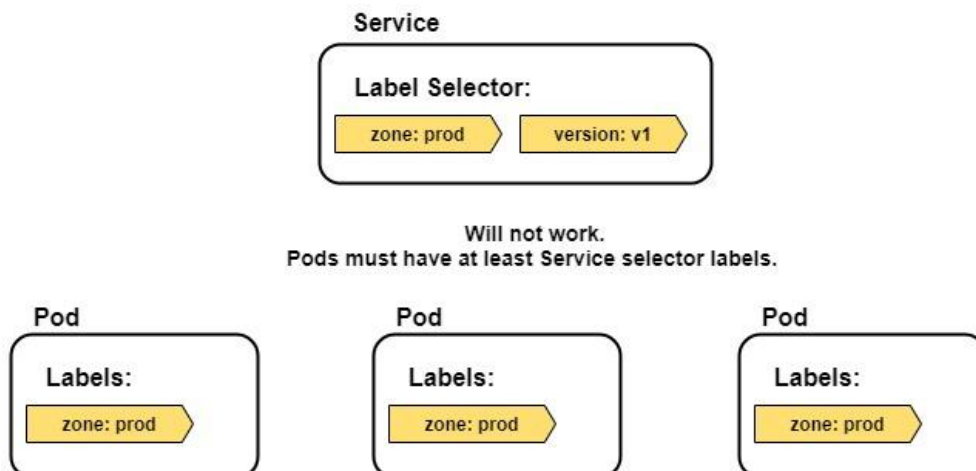


32

Labels and loose coupling

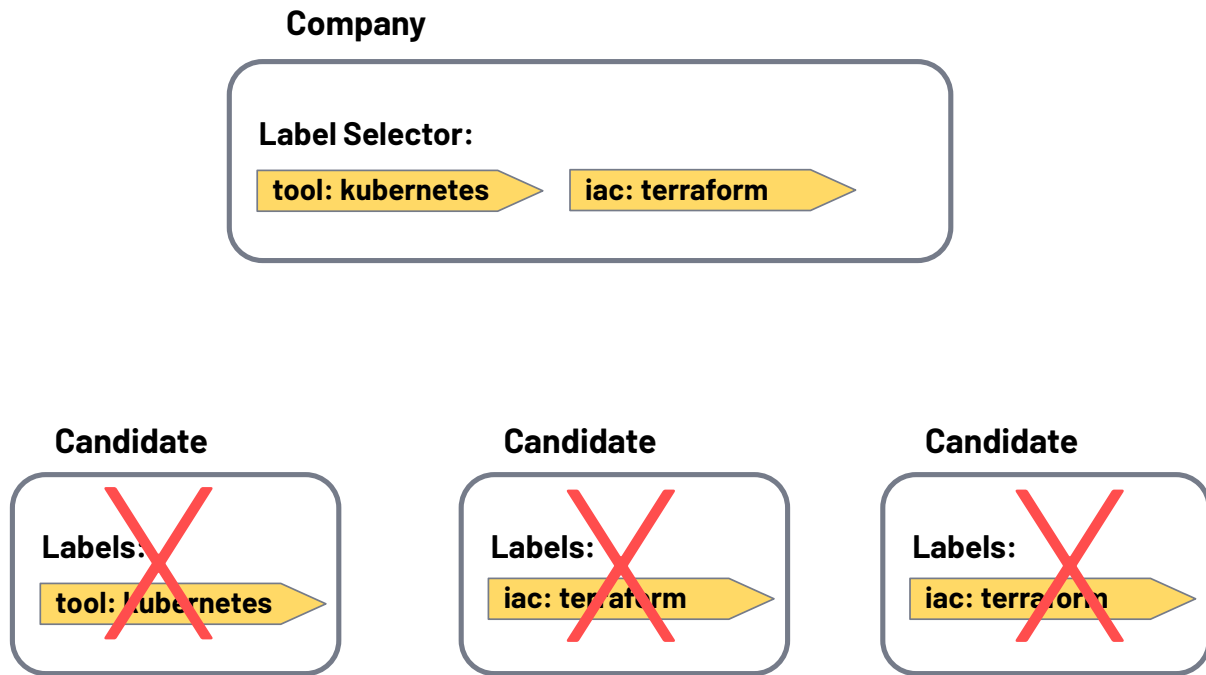


Labels and loose coupling

This figure shows an example that does work. It doesn't matter that the Pods have additional labels that the Service is not selecting on.

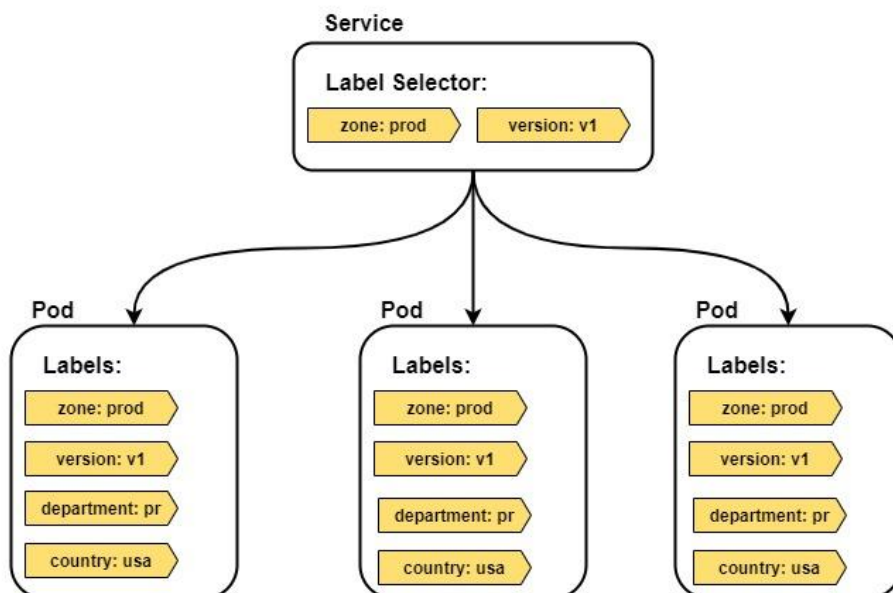

Labels and loose coupling

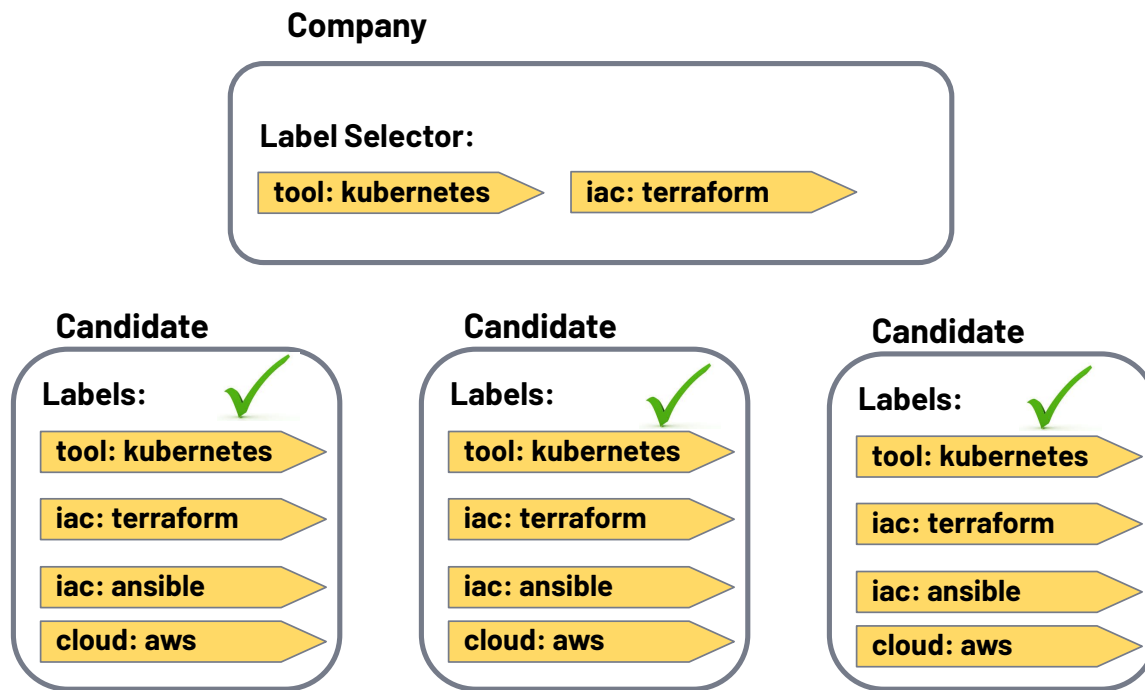

35



THANKS!

Any questions?

You can find me at:

- ▶ Email: serdar@clarusway.com
- ▶ Slack: @serdar - instructor



Students, write your response!




5

Kubernetes hands-on-03


Pod to Pod Connection




db pod can connect to **web** pod directly, if only it knows the IP and port number of the **web** pod.

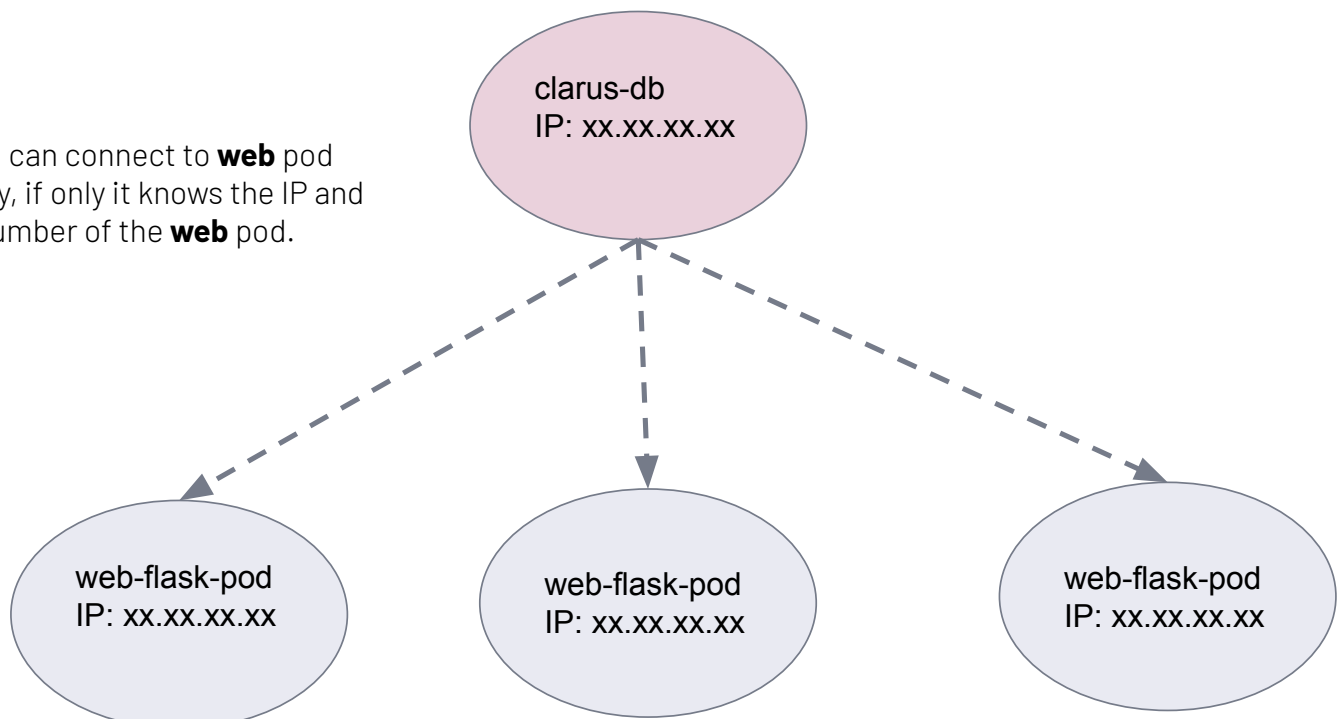


ClusterIP

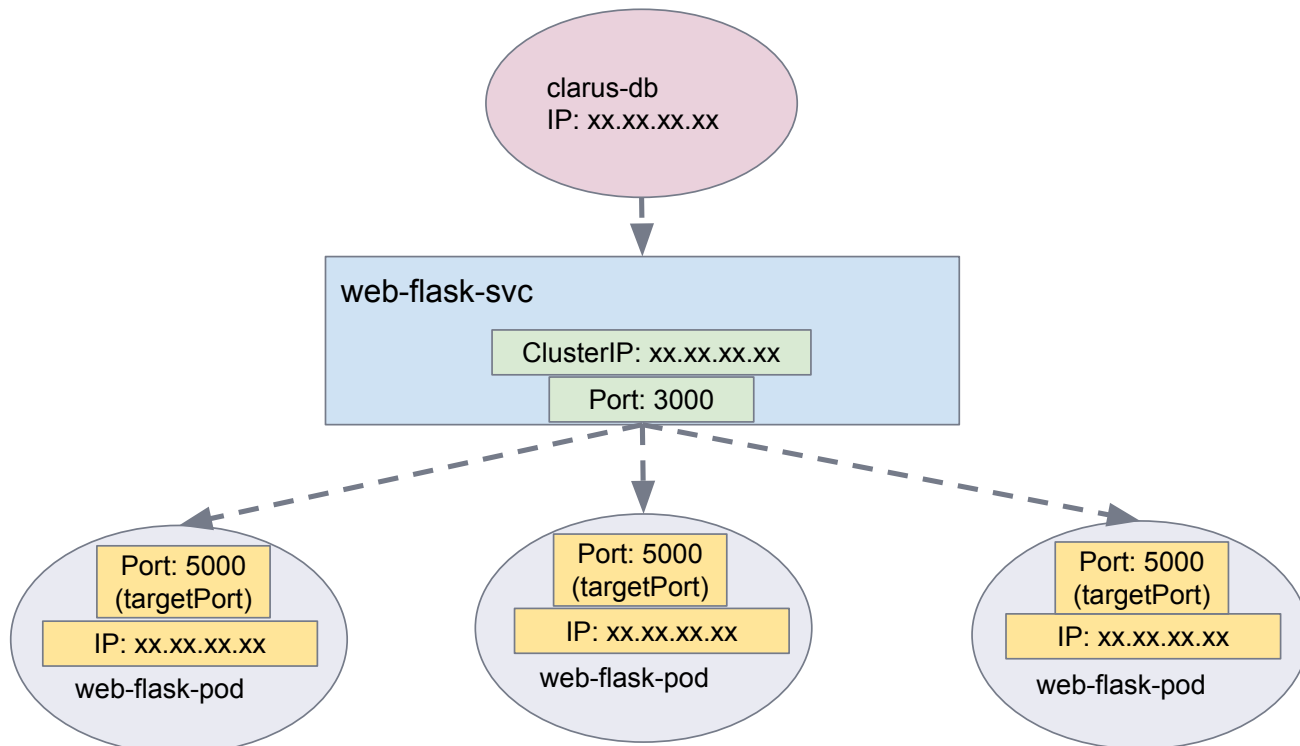

ClusterIP

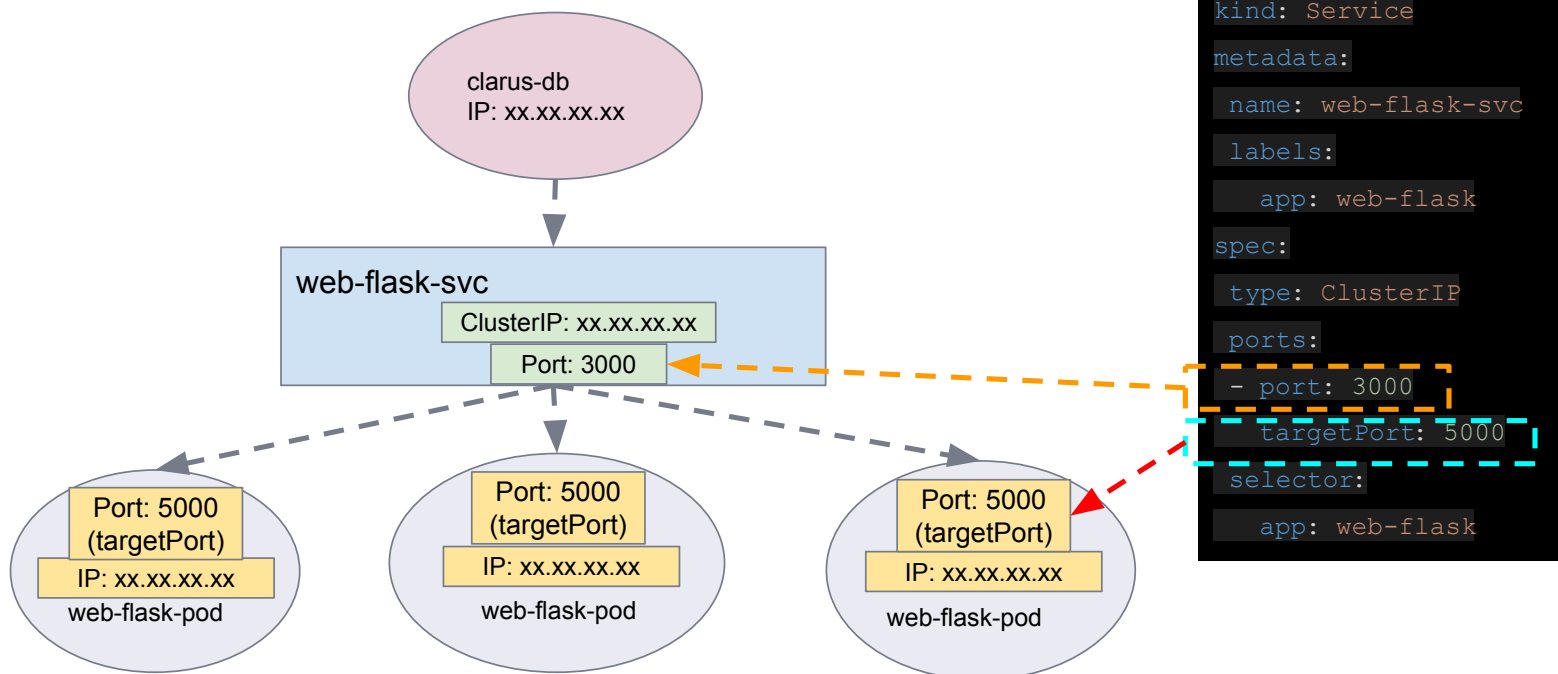


NodePort

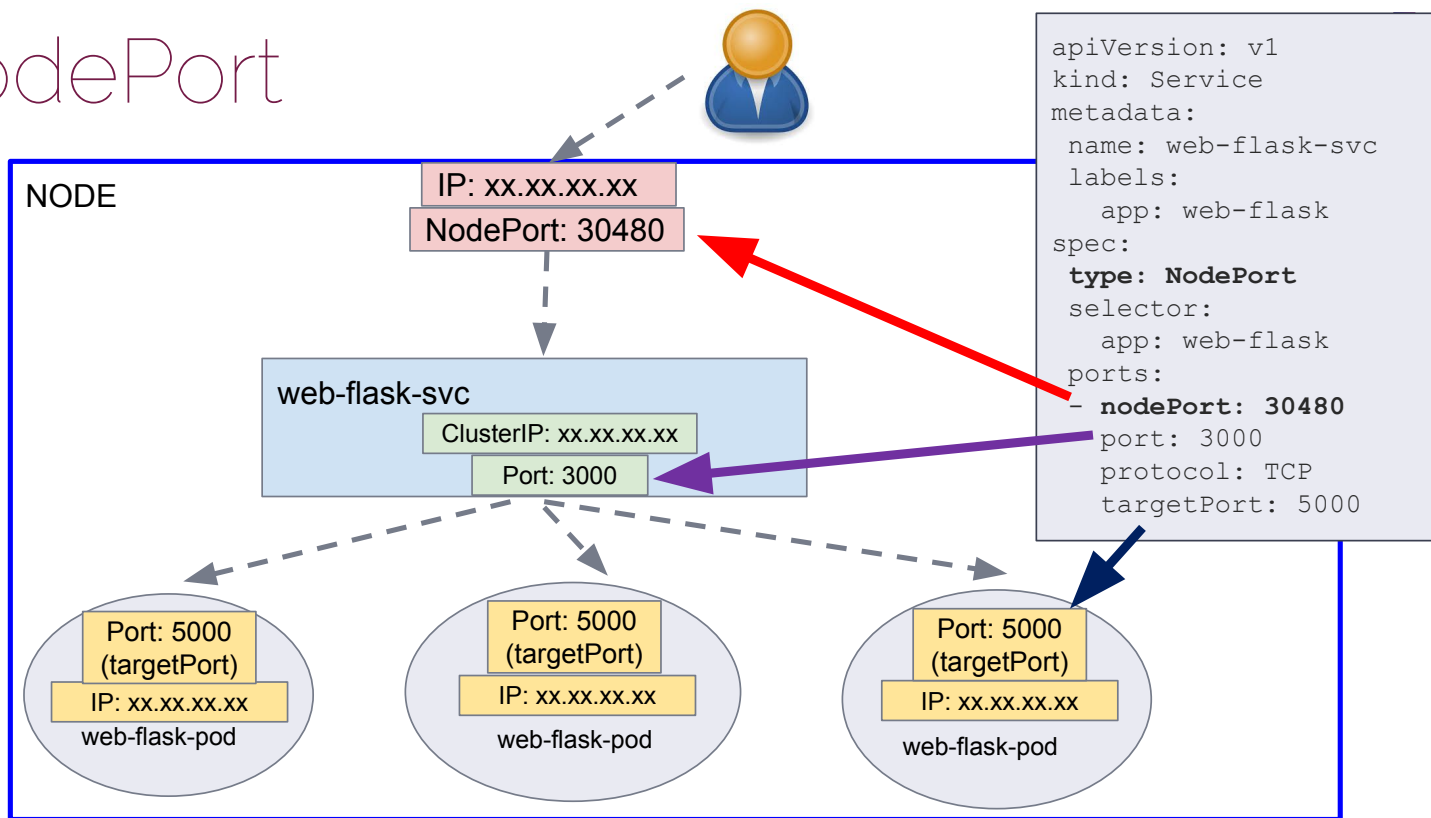


Endpoint

loadbalances

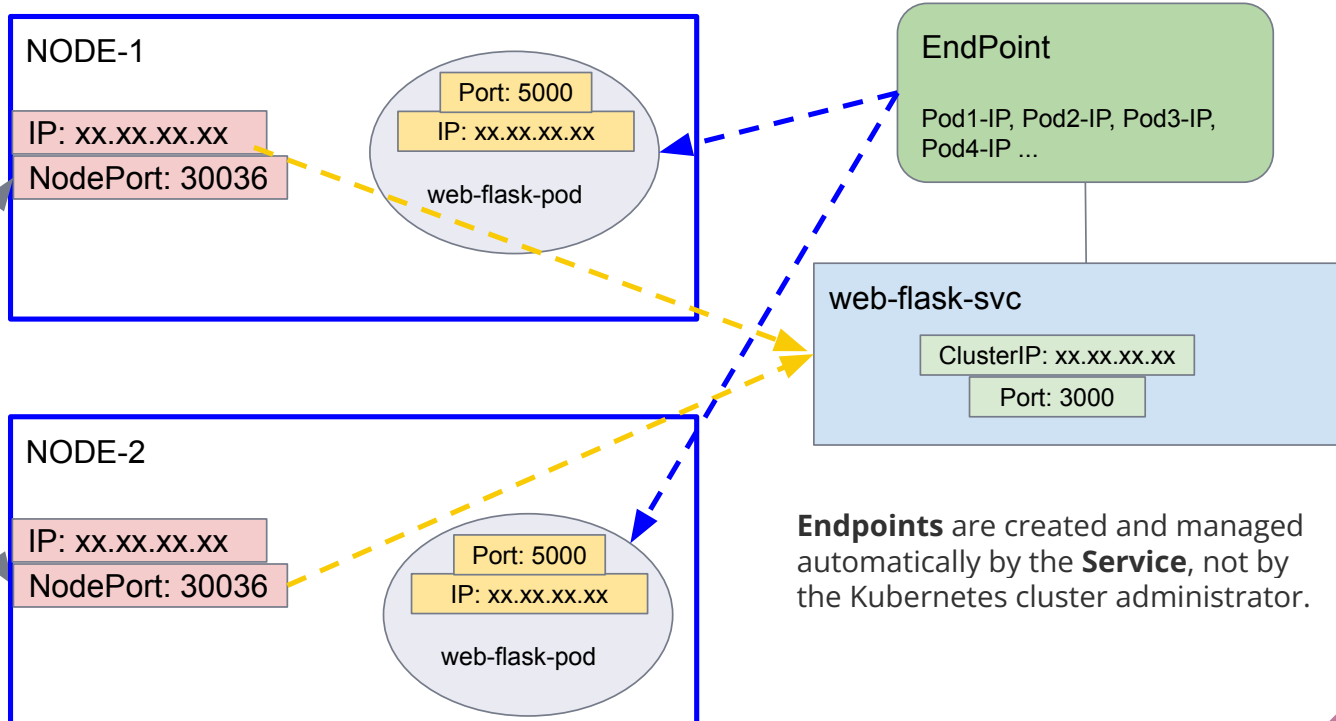


Network drivers

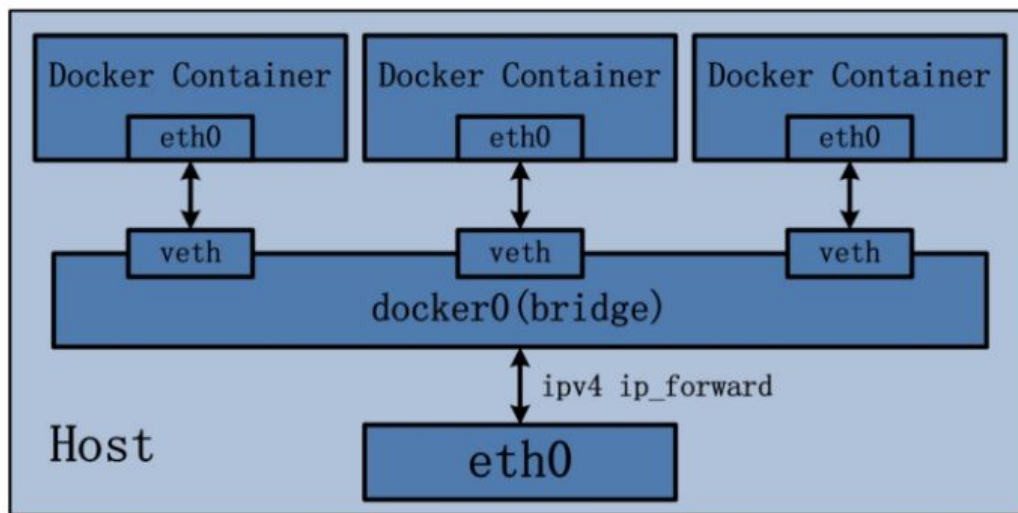

Network drivers



- When we create containers, it will automatically attach to the bridge driver.

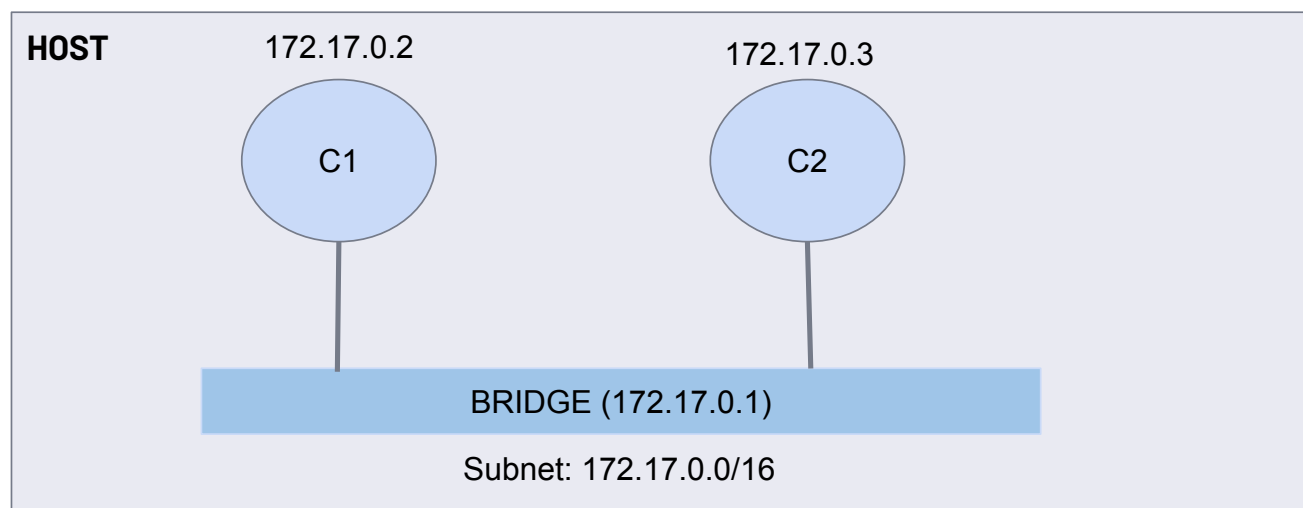


User-defined bridge networks

In addition to the default networks, users can create their own networks called **user-defined networks** of any network driver type.

```
$ docker network create --driver bridge clarusnet
```

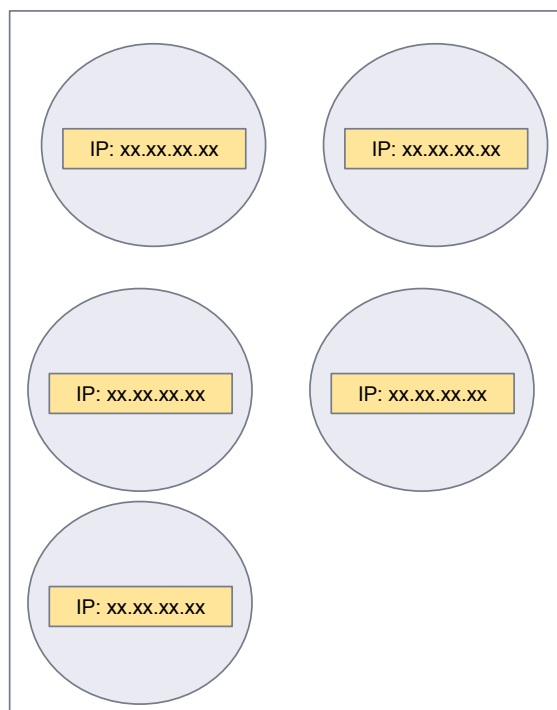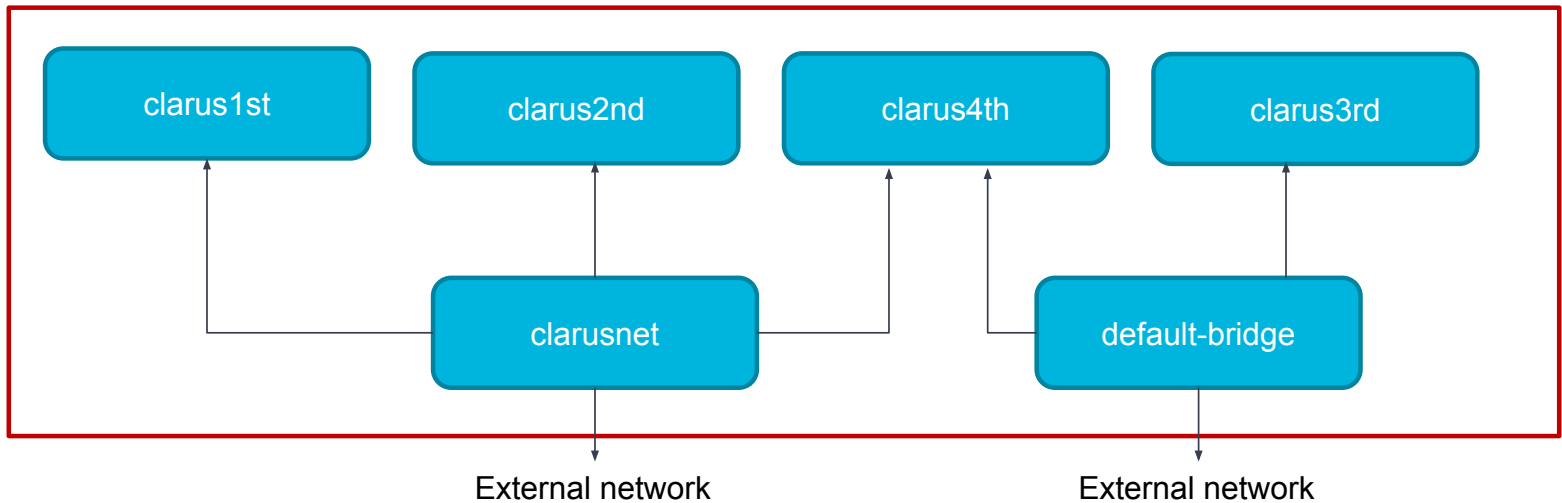

Worker-1

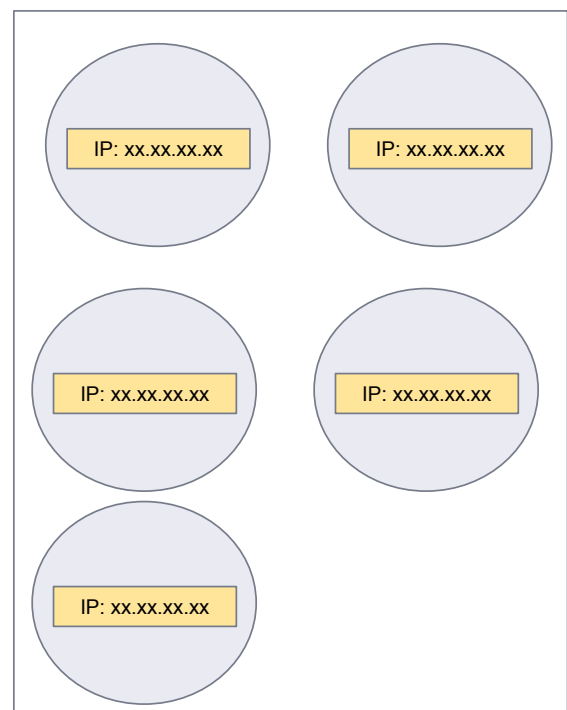

Worker-2