

Using Web Services

Chapter 13



Python for Informatics: Exploring Information
www.pythonlearn.com



Data on the Web


- With the HTTP Request/Response well understood and well supported, there was a natural move toward exchanging data between programs using these protocols
- We needed to come up with an agreed way to represent data going between applications and across networks
- There are two commonly used formats: XML and JSON

Sending Data across the “Net”




a.k.a. “Wire Protocol” - What we send on the “wire”

Agreeing on a “Wire Format”

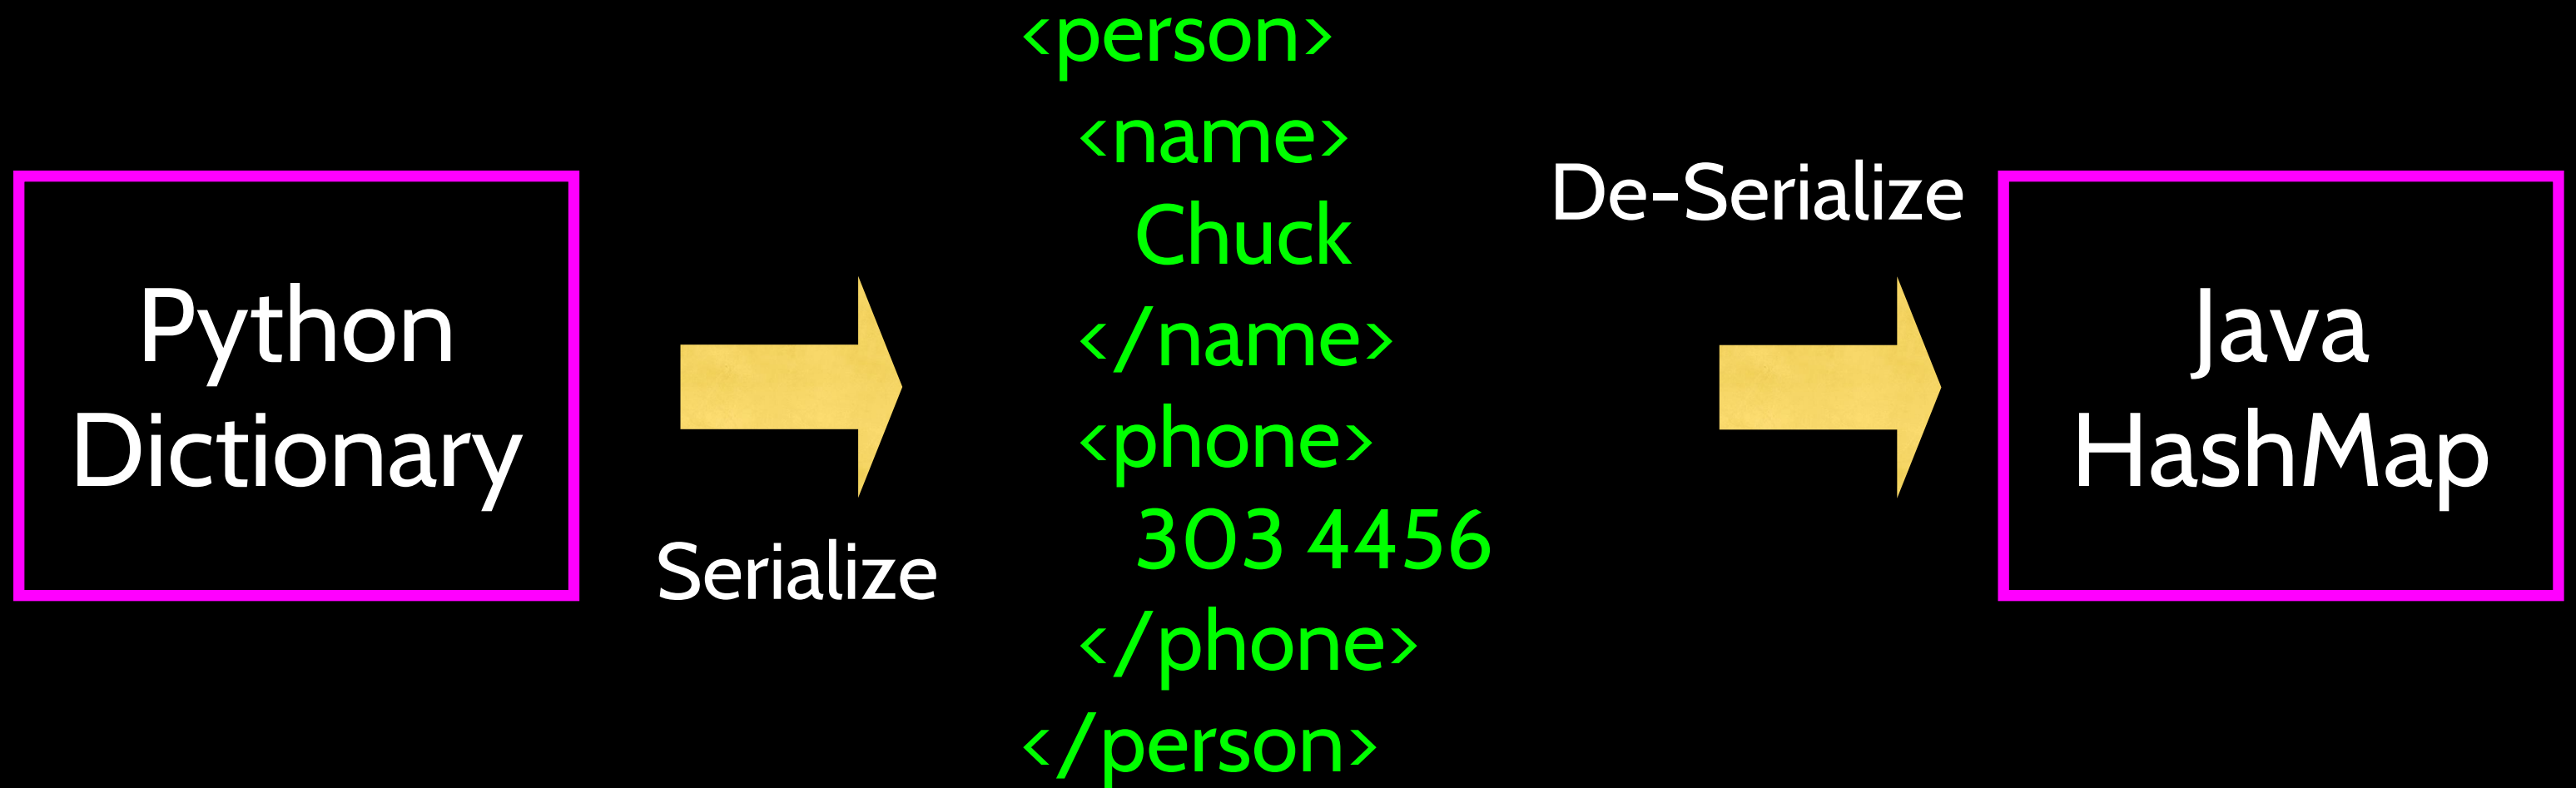

XML

Agreeing on a “Wire Format”

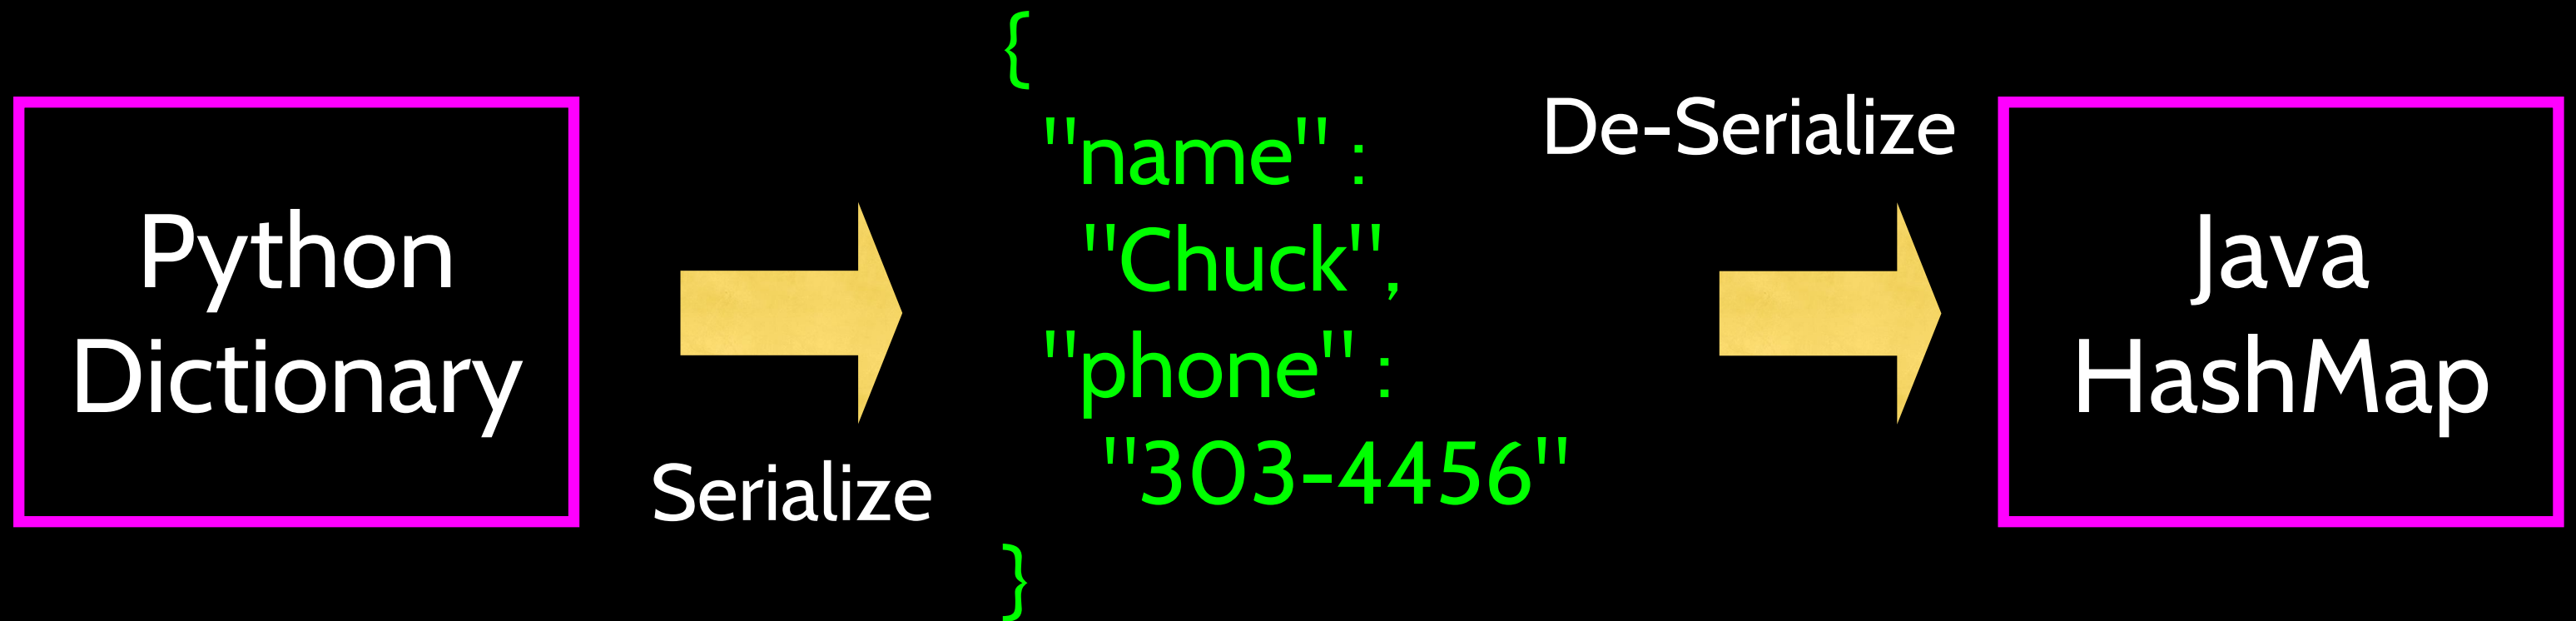

JSON

XML “Elements” (or Nodes)

- Simple Element
- Complex Element

```
<people>
  <person>
    <name>Chuck</name>
    <phone>303 4456</phone>
  </person>
  <person>
    <name>Noah</name>
    <phone>622 7421</phone>
  </person>
</people>
```

XML

Marking up data to send across the network...

<http://en.wikipedia.org/wiki/XML>

eXtensible Markup Language

- Primary purpose is to help information systems **share structured data**
- It started as a simplified subset of the Standard Generalized Markup Language (SGML), and is designed to be relatively human-legible

<http://en.wikipedia.org/wiki/XML>

XML Basics

- Start Tag

- End Tag

- Text Content

- Attribute

- Self Closing Tag

```
<person>
  <name>Chuck</name>
  <phone type="intl">
    +1 734 303 4456
  </phone>
  <email hide="yes" />
</person>
```

```
<person>
  <name>Chuck</name>
  <phone type="intl">
    +1 734 303 4456
  </phone>
  <email hide="yes" />
</person>
```

White Space

Line ends do not matter.
White space is generally
discarded on text elements.
We indent only to be readable.

```
<person>
  <name>Chuck</name>
  <phone type="intl">+1 734 303 4456</phone>
  <email hide="yes" />
</person>
```

Some XML...

```
<recipe name="bread" prep_time="5 mins" cook_time="3 hours">
  <title>Basic bread</title>
  <ingredient amount="8" unit="dL">Flour</ingredient>
  <ingredient amount="10" unit="grams">Yeast</ingredient>
  <ingredient amount="4" unit="dL" state="warm">Water</ingredient>
  <ingredient amount="1" unit="teaspoon">Salt</ingredient>
  <instructions>
    <step>Mix all ingredients together.</step>
    <step>Knead thoroughly.</step>
    <step>Cover with a cloth, and leave for one hour in warm room.</step>
    <step>Knead again.</step>
    <step>Place in a bread baking tin.</step>
    <step>Cover with a cloth, and leave for one hour in warm room.</step>
    <step>Bake in the oven at 180(degrees)C for 30 minutes.</step>
  </instructions>
</recipe>
```

<http://en.wikipedia.org/wiki/XML>

XML Terminology


- **Tags** indicate the beginning and ending of elements
- **Attributes** - Keyword/value pairs on the opening tag of XML
- **Serialize / De-Serialize** - Convert data in one program into a common format that can be stored and/or transmitted between systems in a programming language-independent manner

<http://en.wikipedia.org/wiki/Serialization>

XML as a Tree

```
<a>  
  <b>X</b>  
  <c>  
    <d>Y</d>  
    <e>Z</e>  
  </c>  
</a>
```


Elements Text

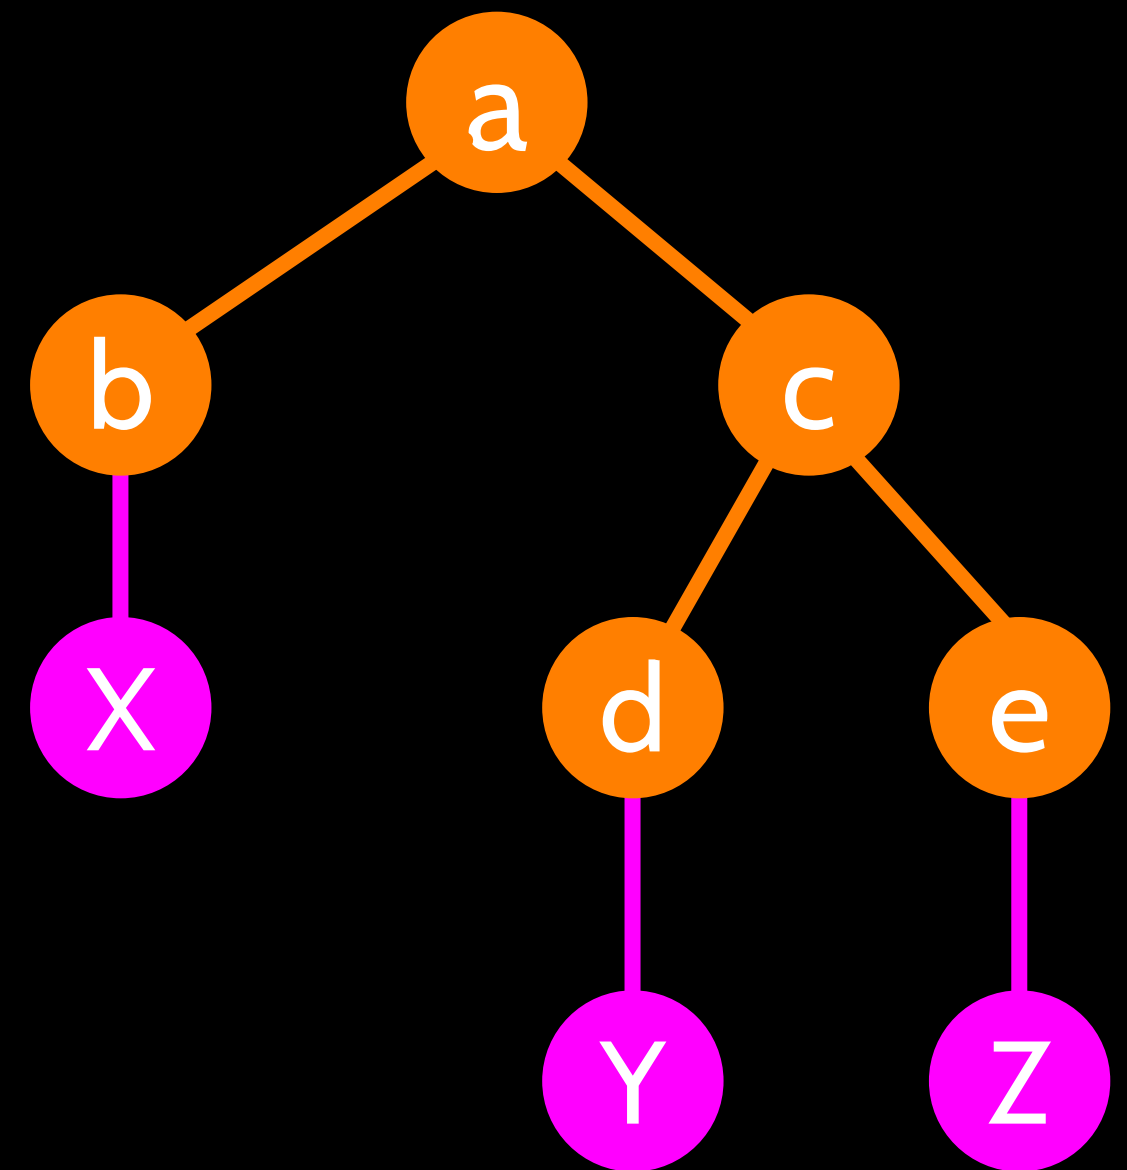

XML Text and Attributes

```
<a>  
  <b w="5">X</b>  
  <c>  
    <d>Y</d>  
    <e>Z</e>  
  </c>  
</a>
```


Elements Text

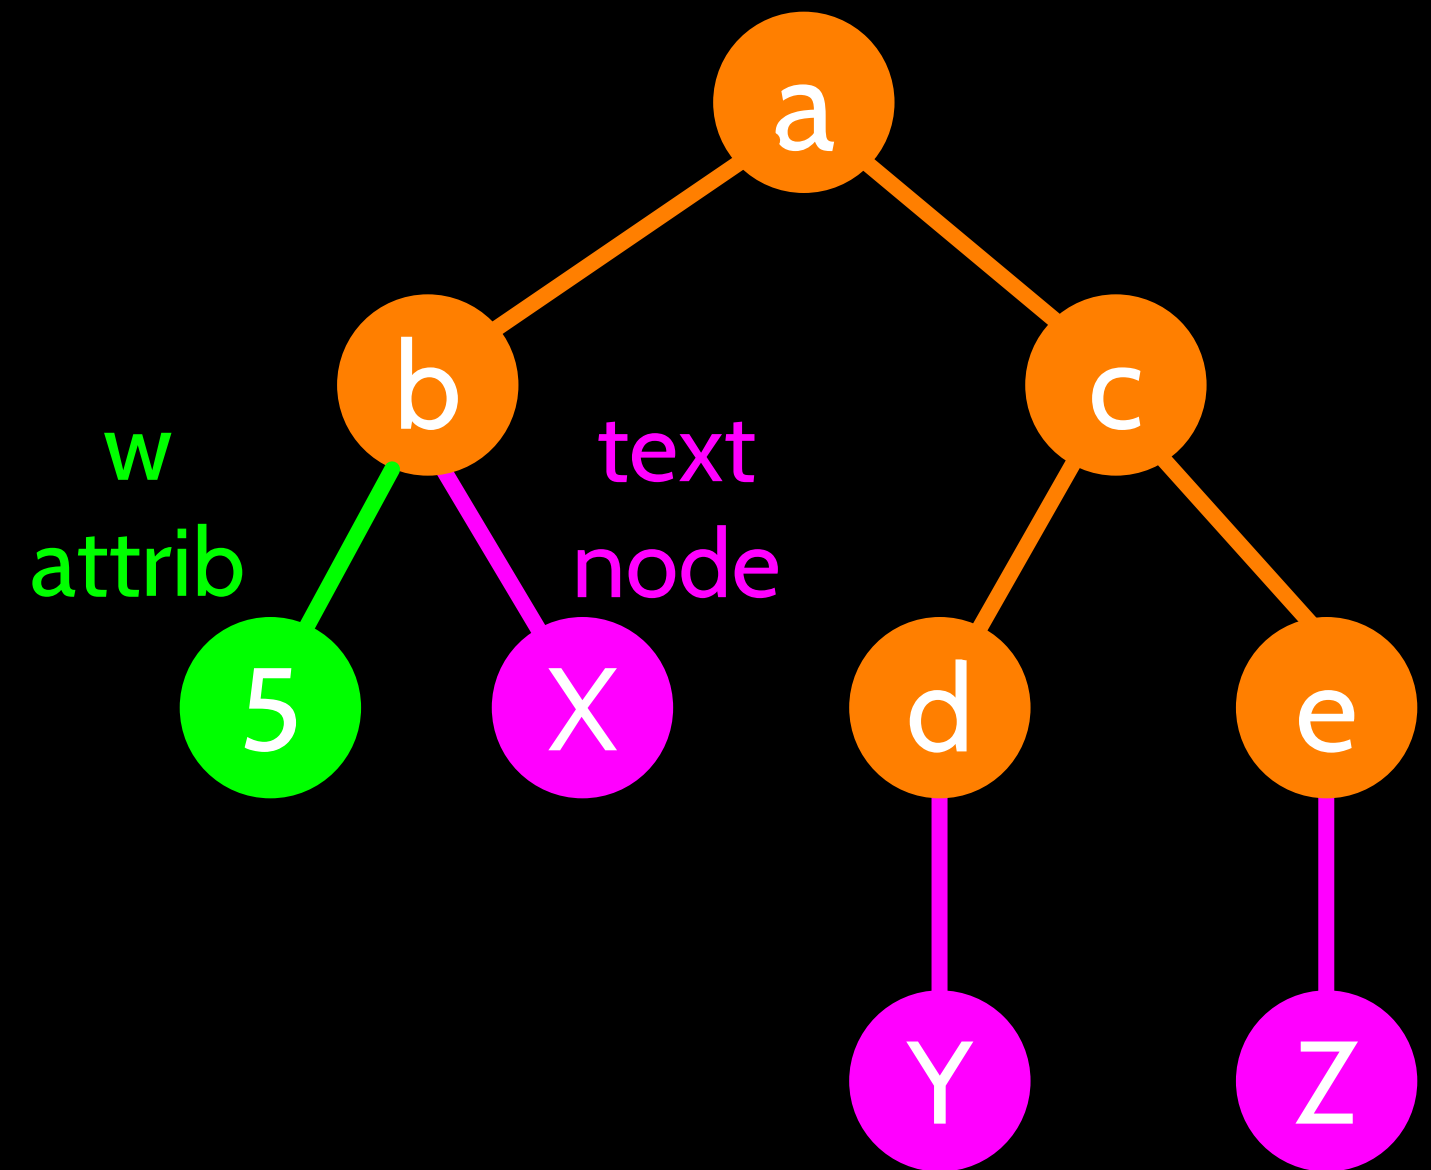


XML as Paths

```
<a>  
  <b>X</b>  
  <c>  
    <d>Y</d>  
    <e>Z</e>  
  </c>  
</a>
```

Elements Text

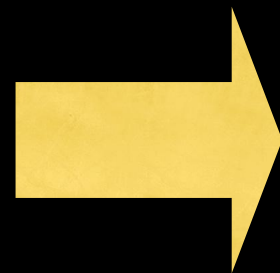

/a/b	X
/a/c/d	Y
/a/c/e	Z

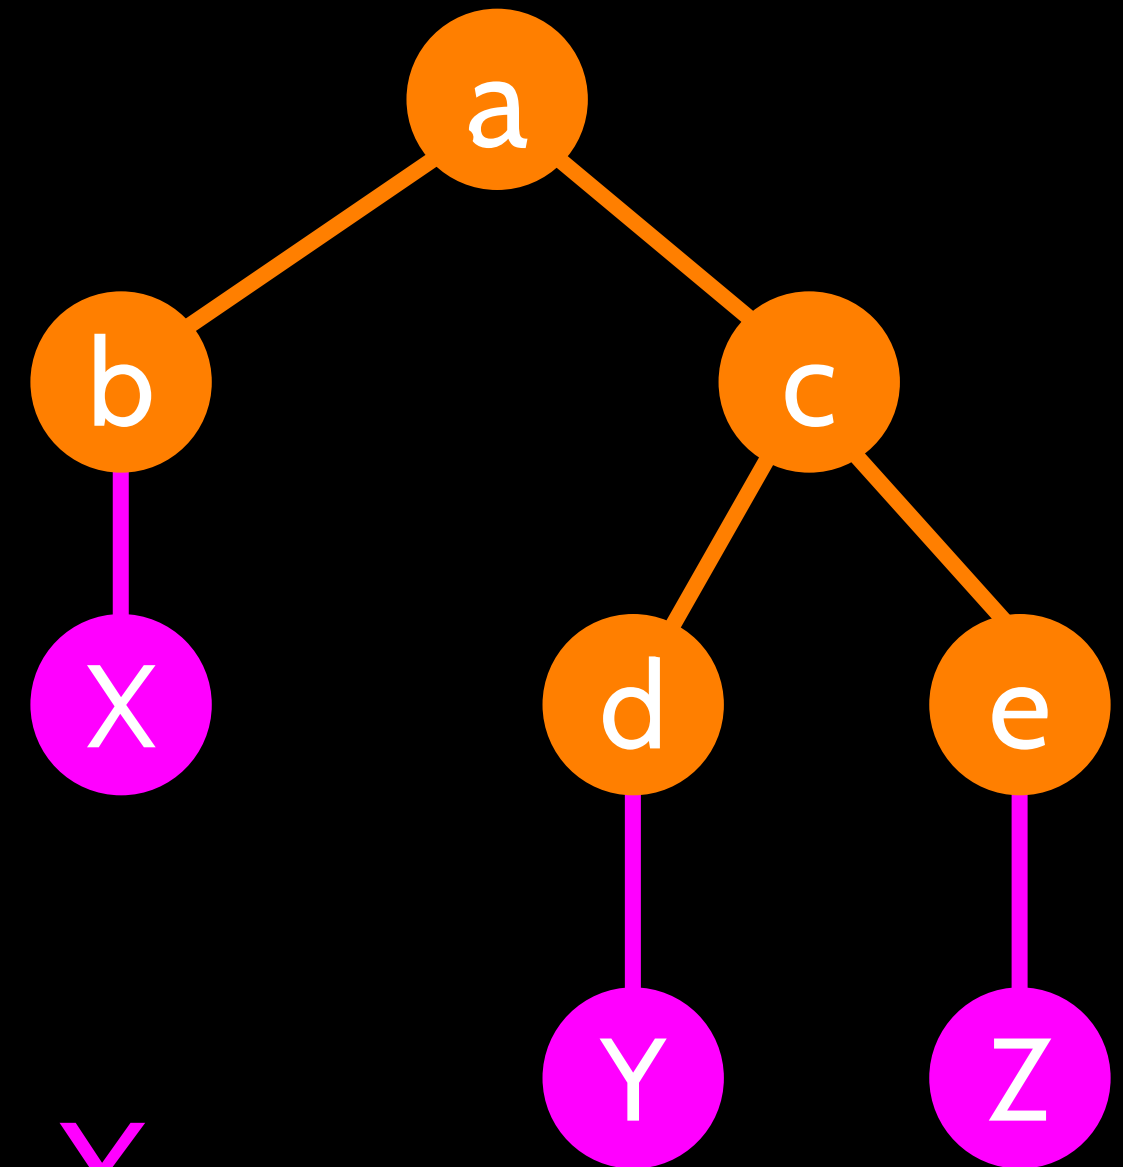

XML Schema

Describing a “**contract**” as to what is acceptable XML.

http://en.wikipedia.org/wiki/XML_schema

http://en.wikibooks.org/wiki/XML_Schema


XML Schema

- Description of the **legal format** of an XML document
- Expressed in terms of constraints on the structure and content of documents
- Often used to specify a “**contract**” between systems – “My system will only accept XML that conforms to this particular Schema.”
- If a particular piece of XML meets the specification of the Schema – it is said to “**validate**”


http://en.wikipedia.org/wiki/Xml_schema

XML Validation

XML Document

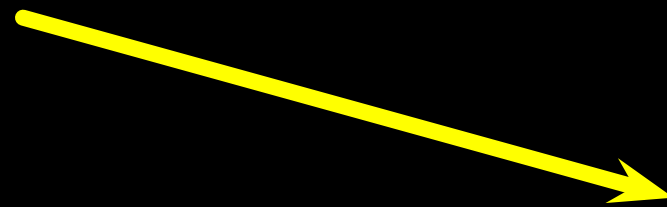

XML Schema
Contract

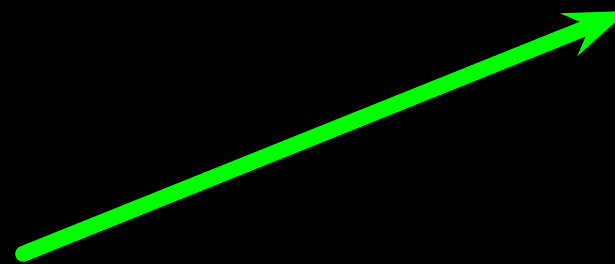

Validator



XML Validation

XML Document

```
<person>  
  <lastname>Severance</lastname>  
  <age>17</age>  
  <dateborn>2001-04-17</dateborn>  
</person>
```

XML Schema Contract


```
<xs:complexType name="person">  
  <xs:sequence>  
    <xs:element name="lastname" type="xs:string"/>  
    <xs:element name="age" type="xs:integer"/>  
    <xs:element name="dateborn" type="xs:date"/>  
  </xs:sequence>  
</xs:complexType>
```

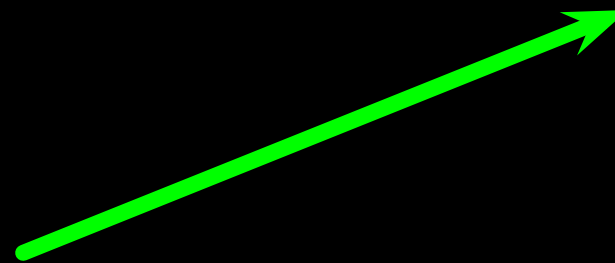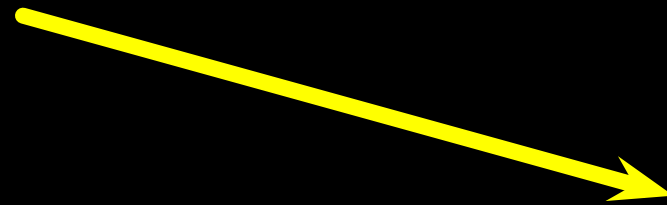

Validator

Many XML Schema Languages

- Document Type Definition (DTD)
 - http://en.wikipedia.org/wiki/Document_Type_Definition
- Standard Generalized Markup Language (ISO 8879:1986 SGML)
 - <http://en.wikipedia.org/wiki/SGML>
- XML Schema from W3C - (XSD)
 - [http://en.wikipedia.org/wiki/XML_Schema_\(W3C\)](http://en.wikipedia.org/wiki/XML_Schema_(W3C))

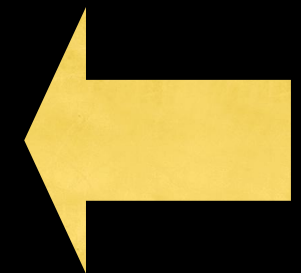

http://en.wikipedia.org/wiki/Xml_schema

XSD XML Schema (W3C spec)

- We will focus on the World Wide Web Consortium (W3C) version
- It is often called “W3C Schema” because “Schema” is considered generic
- More commonly it is called XSD because the file names end in .xsd

<http://www.w3.org/XML/Schema>

[http://en.wikipedia.org/wiki/XML_Schema_\(W3C\)](http://en.wikipedia.org/wiki/XML_Schema_(W3C))

XSD Structure

- xs:element
- xs:sequence
- xs:complexType

```
<person>  
  <lastname>Severance</lastname>  
  <age>17</age>  
  <dateborn>2001-04-17</dateborn>  
</person>
```

```
<xs:complexType name="person">  
  <xs:sequence>  
    <xs:element name="lastname" type="xs:string"/>  
    <xs:element name="age" type="xs:integer"/>  
    <xs:element name="dateborn" type="xs:date"/>  
  </xs:sequence>  
</xs:complexType>
```

XSD

Constraints

```
<xs:element name="person">
  <xs:complexType>
    <xs:sequence>
      <xs:element name="full_name" type="xs:string"
        minOccurs="1" maxOccurs="1" />
      <xs:element name="child_name" type="xs:string"
        minOccurs="0" maxOccurs="10" />
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

```
<person>
  <full_name>Tove Refsnes</full_name>
  <child_name>Hege</child_name>
  <child_name>Stale</child_name>
  <child_name>Jim</child_name>
  <child_name>Borge</child_name>
</person>
```

http://www.w3schools.com/Schema/schema_complex_indicators.asp

XSD Data Types

```
<xs:element name="customer" type="xs:string"/>  
<xs:element name="start" type="xs:date"/>  
<xs:element name="startdate" type="xs:dateTime"/>  
<xs:element name="prize" type="xs:decimal"/>  
<xs:element name="weeks" type="xs:integer"/>
```

It is common to represent time in UTC/GMT, given that servers are often scattered around the world.

```
<customer>John Smith</customer>  
<start>2002-09-24</start>  
<startdate>2002-05-30T09:30:10Z</startdate>  
<prize>999.50</prize>  
<weeks>30</weeks>
```

http://www.w3schools.com/Schema/schema_dtypes_numeric.asp

ISO 8601 Date/Time Format


2002-05-30T09:30:10Z



Year-month-day



Time of day



Timezone - typically
specified in UTC / GMT
rather than local time zone.


http://en.wikipedia.org/wiki/ISO_8601

http://en.wikipedia.org/wiki/Coordinated_Universal_Time

```

<?xml version="1.0" encoding="utf-8" ?>
<xs:schema elementFormDefault="qualified" xmlns:xs="http://www.w3.org/2001/XMLSchema">
  <xs:element name="Address">
    <xs:complexType>
      <xs:sequence>
        <xs:element name="Recipient" type="xs:string" />
        <xs:element name="House" type="xs:string" />
        <xs:element name="Street" type="xs:string" />
        <xs:element name="Town" type="xs:string" />
        <xs:element minOccurs="0" name="County" type="xs:string" />
        <xs:element name="PostCode" type="xs:string" />
        <xs:element name="Country">
          <xs:simpleType>
            <xs:restriction base="xs:string">
              <xs:enumeration value="FR" />
              <xs:enumeration value="DE" />
              <xs:enumeration value="ES" />
              <xs:enumeration value="UK" />
              <xs:enumeration value="US" />
            </xs:restriction>
          </xs:simpleType>
        </xs:element>
      </xs:sequence>
    </xs:complexType>
  </xs:element>
</xs:schema>

```



```

<?xml version="1.0" encoding="utf-8"?>
<Address
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:noNamespaceSchemaLocation="SimpleAddress.xsd">
  <Recipient>Mr. Walter C. Brown</Recipient>
  <House>49</House>
  <Street>Featherstone Street</Street>
  <Town>LONDON</Town>
  <PostCode>EC1Y 8SY</PostCode>
  <Country>UK</Country>
</Address>

```



```
<?xml version="1.0" encoding="ISO-8859-1" ?>
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
<xs:element name="shiporder">
  <xs:complexType>
    <xs:sequence>
      <xs:element name="orderperson" type="xs:string"/>
      <xs:element name="shipto">
        <xs:complexType>
          <xs:sequence>
            <xs:element name="name" type="xs:string"/>
            <xs:element name="address" type="xs:string"/>
            <xs:element name="city" type="xs:string"/>
            <xs:element name="country" type="xs:string"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
      <xs:element name="item" maxOccurs="unbounded">
        <xs:complexType>
          <xs:sequence>
            <xs:element name="title" type="xs:string"/>
            <xs:element name="note" type="xs:string" minOccurs="0"/>
            <xs:element name="quantity" type="xs:positiveInteger"/>
            <xs:element name="price" type="xs:decimal"/>
          </xs:sequence>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
    <xs:attribute name="orderid" type="xs:string" use="required"/>
  </xs:complexType>
</xs:element>
</xs:schema>
```

http://www.w3schools.com/Schema/schema_example.asp

```
import xml.etree.ElementTree as ET
data = '''<person>
  <name>Chuck</name>
  <phone type="intl">
    +1 734 303 4456
  </phone>
  <email hide="yes"/>
</person>'''

tree = ET.fromstring(data)
print 'Name:', tree.find('name').text
print 'Attr:', tree.find('email').get('hide')
```

```
import xml.etree.ElementTree as ET
input = '''<stuff>
    <users>
        <user x="2">
            <id>001</id>
            <name>Chuck</name>
        </user>
        <user x="7">
            <id>009</id>
            <name>Brent</name>
        </user>
    </users>
</stuff>'''

stuff = ET.fromstring(input)
lst = stuff.findall('users/user')
print 'User count:', len(lst)
for item in lst:
    print 'Name', item.find('name').text
    print 'Id', item.find('id').text
    print 'Attribute', item.get("x")
```


JavaScript Object Notation

JavaScript Object Notation

- Douglas Crockford – “Discovered” JSON
- Object literal notation in JavaScript



<http://www.youtube.com/watch?v=kc8BAR7SHJI>

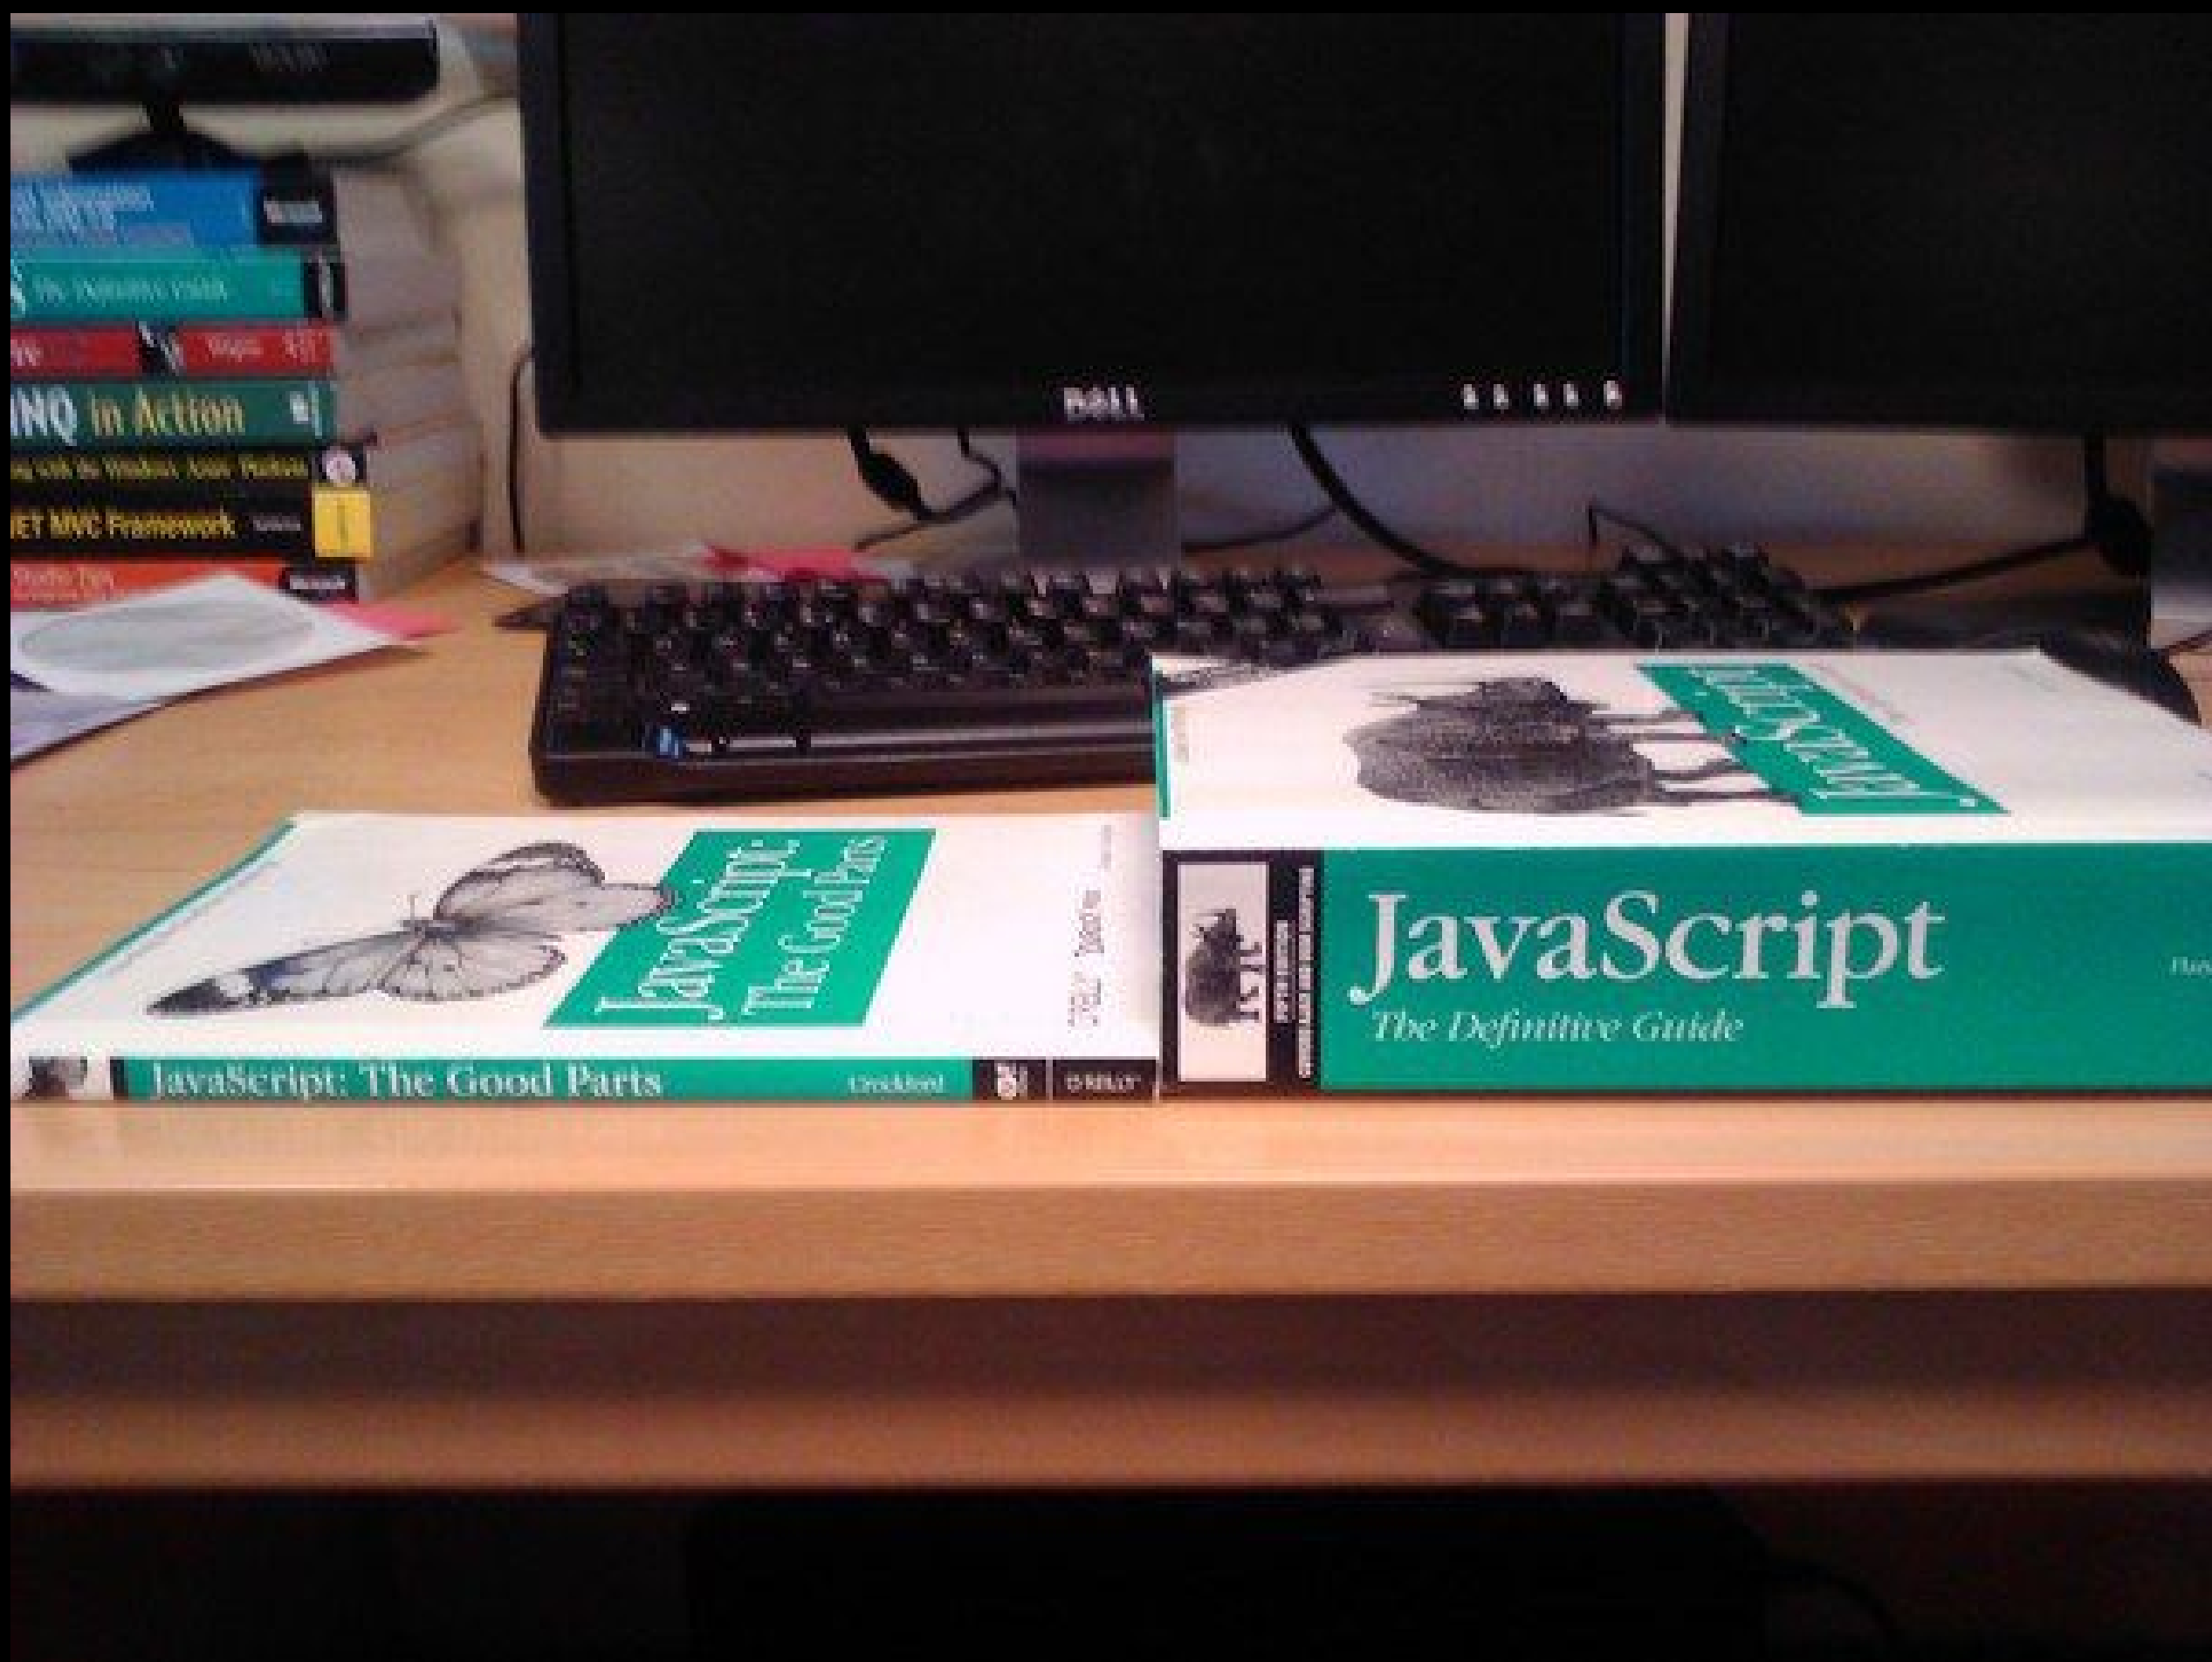

JSON

⏮

⏭

🏠


+

🌐

http://www.json.org/

↻

🔍 Google



Introducing JSON

العربية

Български

中文

Český

Nederlandse

Dansk

English

Esperanto

Française

Deutsch

Ελληνικά

עברית

Magyar

Indonesia

Italiano

日本

한국어

فارسی

Polski

Português

Română

Русский

Српски

Slovenščina

Español

Svenska

Türkçe

Tiếng Việt

JSON (JavaScript Object Notation) is a lightweight data-interchange format. It is easy for humans to read and write. It is easy for machines to parse and generate. It is based on a subset of the [JavaScript Programming Language, Standard ECMA-262 3rd Edition - December 1999](#). JSON is a text format that is completely language independent but uses conventions that are familiar to programmers of the C-family of languages, including C, C++, C#, Java, JavaScript, Perl, Python, and many others. These properties make JSON an ideal data-interchange language.

JSON is built on two structures:

- A collection of name/value pairs. In various languages, this is realized as an *object*, record, struct, dictionary, hash table, keyed list, or associative array.
- An ordered list of values. In most languages, this is realized as an *array*, vector, list, or sequence.

These are universal data structures. Virtually all modern programming languages support them in one form or another. It makes sense that a data format that is interchangeable with programming languages also be based on these structures.

In JSON, they take on these forms:

An *object* is an unordered set of name/value pairs. An object begins with { (left brace) and ends with } (right

object

{ }

{ *members* }

members

pair

pair , *members*

pair

string : *value*

array

[]

[*elements*]

elements

value

value , *elements*

value

string

number

object

```
import json
data = '''{
    "name" : "Chuck",
    "phone" : {
        "type" : "intl",
        "number" : "+1 734 303 4456"
    },
    "email" : {
        "hide" : "yes"
    }
}'''

info = json.loads(data)
print 'Name:', info["name"]
print 'Hide:', info["email"]["hide"]
```

JSON represents data as
nested “lists” and
“dictionaries”

```
import json
input = '''[
    { "id" : "001",
      "x" : "2",
      "name" : "Chuck"
    } ,
    { "id" : "009",
      "x" : "7",
      "name" : "Chuck"
    }
]'''

info = json.loads(input)
print 'User count:', len(info)
for item in info:
    print 'Name', item['name']
    print 'Id', item['id']
    print 'Attribute', item['x']
```


JSON represents data as
nested “lists” and
“dictionaries”

Service Oriented Approach

http://en.wikipedia.org/wiki/Service-oriented_architecture


Service Oriented Approach

- Most non-trivial web applications use services
- They use services from other applications
 - Credit Card Charge
 - Hotel Reservation systems
- Services publish the “rules” applications must follow to make use of the service (**API**)

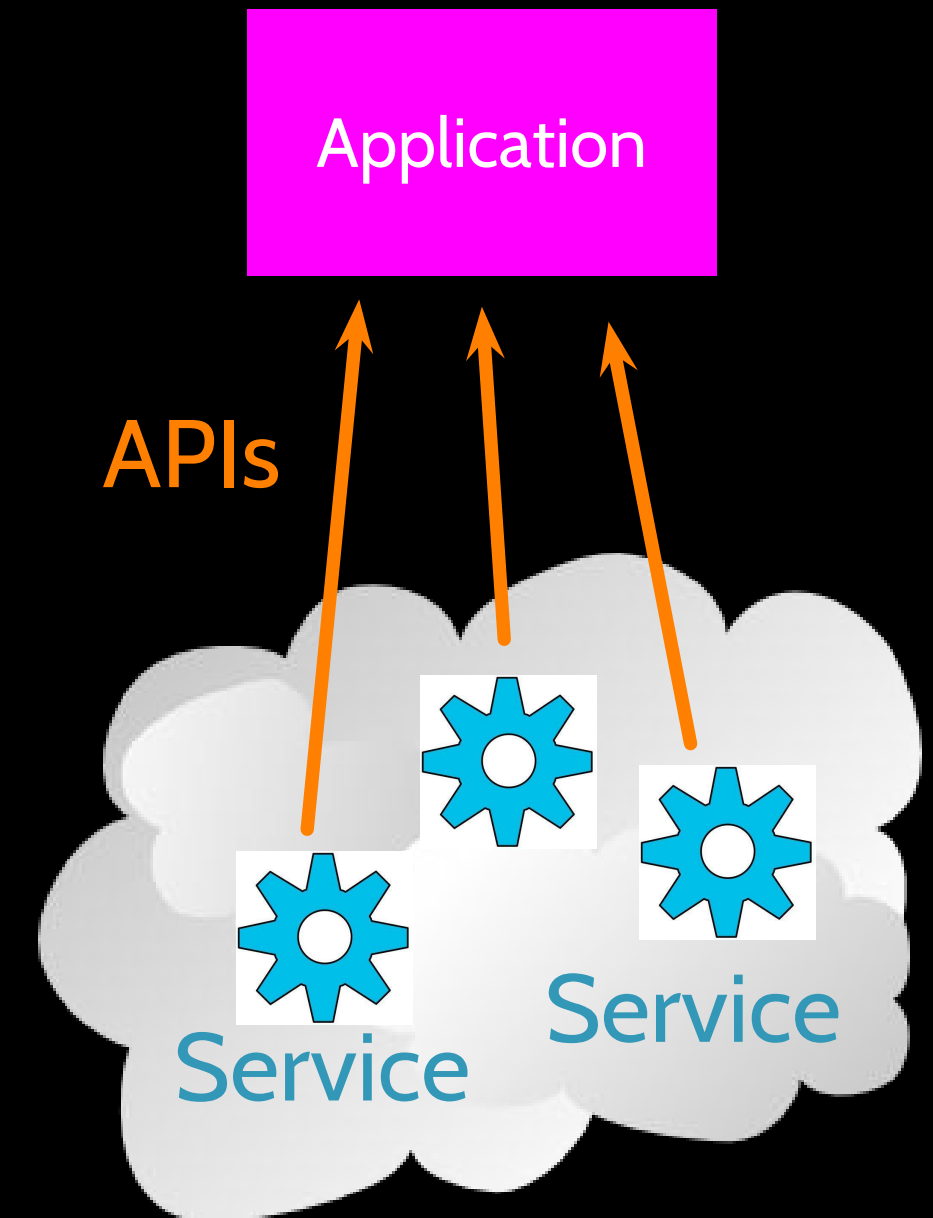

Multiple Systems

- Initially - two systems cooperate and split the problem
- As the data/service becomes useful - multiple applications want to use the information / application

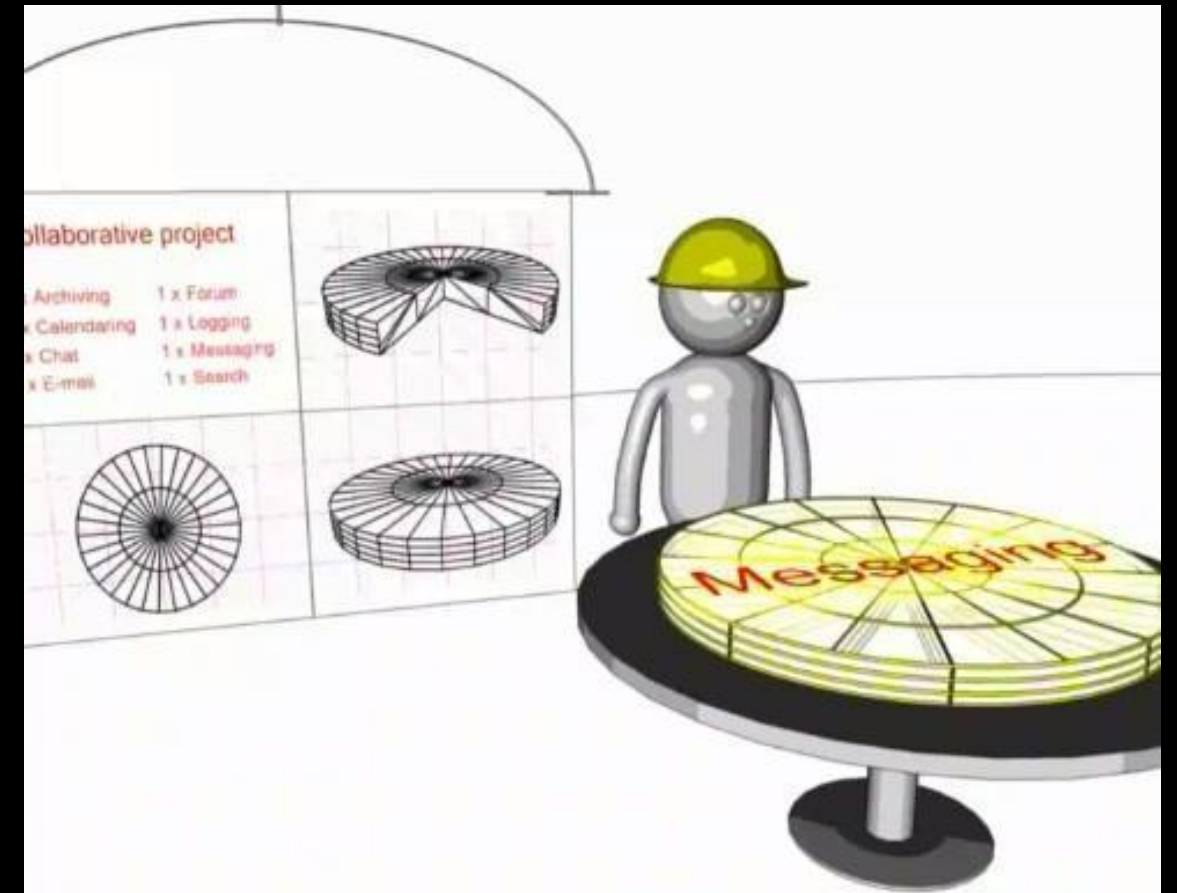

Web Services

http://en.wikipedia.org/wiki/Web_services

Application Program Interface

The API itself is largely abstract in that it specifies an interface and controls the behavior of the objects specified in that interface. The software that provides the functionality described by an API is said to be an “implementation” of the API. An API is typically defined in terms of the programming language used to build an application.

<http://en.wikipedia.org/wiki/API>

Web Service Technologies



- **SOAP** - Simple Object Access Protocol (software)
 - Remote programs/code which we use over the network
 - Note: Dr. Chuck does not like SOAP because it is overly complex
- **REST** - Representational State Transfer (resource focused)
 - Remote resources which we create, read, update and delete remotely


[http://en.wikipedia.org/wiki/SOAP_\(protocol\)](http://en.wikipedia.org/wiki/SOAP_(protocol))

<http://en.wikipedia.org/wiki/REST>


The Google Geocoding API x

← → ↺ 🏠 <https://developers.google.com/maps/documentation/geocoding/> ☆ 🗨️ PHP ☰

 Google Developers Google Maps API X Search 

csev@umich.edu Sign out 

Developers > Google Maps API > Web iOS Android Showcase Support Blog GDG Live

Google Maps API Web Services  +1 128 [Feedback on this document](#)

Introduction
Directions API
Distance Matrix API
Elevation API
Geocoding API
Time Zone API

Blog
Support
FAQ

Maps JavaScript API v3
Google Maps API for Business
Google Places API
Static Maps API
Street View Image API
Earth API
▶ Deprecated APIs

The Google Geocoding API

- [What is Geocoding?](#)
- [Audience](#)
- [Usage Limits](#)
- [Geocoding Requests](#)
- [Geocoding Responses](#)
- [JSON Output Formats](#)
- [XML Output Formats](#)
- [Status Codes](#)
- [Error Messages](#)
- [Results](#)
- [Address Component Types](#)
- [Reverse Geocoding](#)
- [Viewport Biasing](#)
- [Region Biasing](#)
- [Component Filtering](#)

This document discusses the Geocoding API v3. Note that the Geocoding API v2 has been turned down and is no longer available. Users of the Geocoding API v2 service should [upgrade](#) to v3.

Looking to use this service in a JavaScript application? Check out the [Geocoder](#) class of the Google Maps API v3.

What is Geocoding?

Geocoding is the process of converting addresses (like "1600 Amphitheatre Parkway, Mountain View, CA") into geographic coordinates (like latitude 37.423021 and longitude -122.083739), which you can use to place markers or position the map.

<https://developers.google.com/maps/documentation/geocoding/>

```
{
  "status": "OK",
  "results": [
    {
      "geometry": {
        "location_type": "APPROXIMATE",
        "location": {
          "lat": 42.2808256,
          "lng": -83.7430378
        }
      },
      "address_components": [
        {
          "long_name": "Ann Arbor",
          "types": [
            "locality",
            "political"
          ],
          "short_name": "Ann Arbor"
        }
      ],
      "formatted_address": "Ann Arbor, MI, USA",
      "types": [
        "locality",
        "political"
      ]
    }
  ]
}
```

<http://maps.googleapis.com/maps/api/geocode/json?sensor=false&address=Ann+Arbor%2C+MI>

```

import urllib
import json

serviceurl = 'http://maps.googleapis.com/maps/api/geocode/json?'

while True:
    address = raw_input('Enter location: ')
    if len(address) < 1 : break

    url = serviceurl + urllib.urlencode({'sensor':'false',
                                         'address': address})
    print 'Retrieving', url
    uh = urllib.urlopen(url)
    data = uh.read()
    print 'Retrieved',len(data),'characters'

    try: js = json.loads(str(data))
    except: js = None
    if 'status' not in js or js['status'] != 'OK':
        print '==== Failure To Retrieve ====
        print data
        continue

    print json.dumps(js, indent=4)

    lat = js["results"][0]["geometry"]["location"]["lat"]
    lng = js["results"][0]["geometry"]["location"]["lng"]
    print 'lat',lat,'lng',lng
    location = js['results'][0]['formatted_address']
    print location

```

Enter location: Ann Arbor, MI
 Retrieving http://maps.googleapis.com/...
 Retrieved 1669 characters
 lat 42.2808256 lng -83.7430378
 Ann Arbor, MI, USA
 Enter location:

API Security and Rate Limiting

- The compute resources to run these APIs are not “free”
- The data provided by these APIs is usually valuable
- The data providers might limit the number of requests per day, demand an API “key”, or even charge for usage
- They might change the rules as things progress...

Usage Limits

The Google Geocoding API has the following limits in place:

- 2,500 requests per day.

[Google Maps API for Business](#) customers have higher limits:

- 100,000 requests per day.

These limits are enforced to prevent abuse and/or repurposing of the Geocoding API, and may be changed in the future without notice. Additionally, we enforce a request rate limit to prevent abuse of the service. If you exceed the 24-hour limit or otherwise abuse the service, the Geocoding API may stop working for you temporarily. If you continue to exceed this limit, your access to the Geocoding API may be blocked.

The Geocoding API may only be used in conjunction with a Google map; geocoding results without displaying them on a map is prohibited. For complete details on allowed usage, consult the [Maps API Terms of Service License Restrictions](#).

Twitter

Authentication & Authoriz

←

→

↻

🏠

🔒

https://dev.twitter.com/docs/auth

☆

💬

PHP

☰

🐦 Developers

API Health

Blog

Discussions

Documentation

Search

🔍

Sign in

Home → Documentation

🐦 Tweet

Authentication & Authorization

Authentication & Authorization

View

What links here

Updated on Tue, 2013-07-02 12:56

API version 1

API version 1.1

Tags

- OAuth (178)
- Auth (31)

Twitter supports a few authentication methods and with a range of OAuth authentication styles you may be wondering which method you should be using. When choosing which authentication method to use you should understand the way that method will affect your users experience and the way you write your application.

Some of you may already know which type of authentication method you want to use and we want to help you check you've made the right choice.

If you use the...	Send...
REST API	OAuth signed or application-only auth requests
Search API	OAuth signed or application-only auth requests
Streaming API	OAuth signed

Moving from Basic Auth to OAuth →

Tweets | Twitter Developer

← → ↺ 🏠 🔒 https://dev.twitter.com/docs/platform-objects/tweets ☆ 🗨️ PHP ☰

🐦 Developers

API Health

Blog

Discussions

Documentation

Search

Sign in

Home → Documentation → Platform Objects

🐦 Tweet

Tweets

View


What links here

Updated on Tue, 2013-08-13 17:29

API version 1 API version 1.1

Natural habitat

Tweets are the basic atomic building block of all things Twitter. [Users tweet](#) Tweets, also known more generically as "status updates." Tweets can be [embedded](#), [replied to](#), [favorited](#), [unfavorited](#) and [deleted](#).



Brian Sutorius

@bsuto

Follow

The "http://" at the beginning of URLs is a command to the browser. It stands for "head to this place:" followed by two laser-gun noises.

4:29 PM - 21 Feb 2012


4,218 RETWEETS 1,768 FAVORITES

↩ ↺ ★

Field Guide

Consumers of Tweets should tolerate the addition of new fields and variance in ordering of fields with ease. Not all fields appear in all contexts. It is generally safe to consider a nulled field, an empty set, and the absence of a field as the same thing. Please note that Tweets found in Search results vary somewhat in structure from this document.

Field	Type	Description
annotations	Object	Unused. Future/beta home for status annotations.



Related API Resources

- [GET favorites](#)

TwitterREST API v1.1 Resources

←→↺🏠🔒https://dev.twitter.com/docs/api/1.1☆🗨️PHP☰

Developers

API HealthBlogDiscussionsDocumentation

Search

Sign in

Home

REST API v1.1 Resources

Jump to

Timelines

Timelines are collections of Tweets, ordered with the most recent first.

Resource	Description
GET statuses/mentions_timeline	Returns the 20 most recent mentions (tweets containing a users's @screen_name) for the authenticating user. The timeline returned is the equivalent of the one seen when you view your mentions on twitter.com. This method can only return up to 800 tweets. See Working with Timelines for...
GET statuses/user_timeline	Returns a collection of the most recent Tweets posted by the user indicated by the screen_name or user_id parameters. User timelines belonging to protected users may only be requested when the authenticated user either "owns" the timeline or is an approved follower of the owner. The timeline...
GET statuses/home_timeline	Returns a collection of the most recent Tweets and retweets posted by the authenticating user and the users they follow. The home timeline is central to how most users interact with the Twitter service. Up to 800 Tweets are obtainable on the home timeline. It is more volatile for users that follow...
GET statuses/retweets_of_me	Returns the most recent tweets authored by the authenticating user that have been retweeted by others. This timeline is a subset of the user's GET statuses/user_timeline. See Working with Timelines for instructions on traversing timelines.

Tweets

Tweets are the atomic building blocks of Twitter, 140-character status updates with additional associated metadata. People tweet for a variety of reasons about a multitude of topics.

Resource	Description
----------	-------------

```
import urllib
import twurl
import json
TWITTER_URL = 'https://api.twitter.com/1.1/friends/list.json'
while True:
    print ''
    acct = raw_input('Enter Twitter Account:')
    if ( len(acct) < 1 ) : break
    url = twurl.augment(TWITTER_URL,
        {'screen_name': acct, 'count': '5'} )
    print 'Retrieving', url
    connection = urllib.urlopen(url)
    data = connection.read()
    headers = connection.info().dict
    print 'Remaining', headers['x-rate-limit-remaining']
    js = json.loads(data)
    print json.dumps(js, indent=4)
    for u in js['users'] :
        print u['screen_name']
        s = u['status']['text']
        print '    ',s[:50]
```

Enter Twitter Account:drchuck

Retrieving https://api.twitter.com/1.1/friends ...

Remaining 14

```
{
  "users": [
    {
      "status": {
        "text": "@jazzychad I just bought one .__.",
        "created_at": "Fri Sep 20 08:36:34 +0000 2013",
      },
      "location": "San Francisco, California",
      "screen_name": "leahculver",
      "name": "Leah Culver",
    },
    {
      "status": {
        "text": "RT @WSJ: Big employers like Google ...",
        "created_at": "Sat Sep 28 19:36:37 +0000 2013",
      },
      "location": "Victoria Canada",
      "screen_name": "_valeriei",
      "name": "Valerie Irvine",
    }
  ],
}
```

Leahculver

@jazzychad I just bought one .__._

Valeriei

RT @WSJ: Big employers like Google, AT&T are h

Ericbollens

RT @lukew: sneak peek: my LONG take on the good &a
halherzog

Learning Objects is 10. We had a cake with the LO,

twitter2.py

Python on my Laptop | Tw


https://dev.twitter.com/apps/5150888/show

DevelopersAPI HealthBlogDiscussionsDocumentationSearch

Home → My applications

Python on my Laptop

DetailsSettingsOAuth tool@Anywhere domainsReset keysDelete



This is to build test retrieval code for Python

<http://www.pythonlearn.com/twitter/>

Organization


Information about the organization or company associated with your application. This information is optional.

Organization	None
Organization website	None

OAuth settings

Your application's OAuth settings. Keep the "Consumer secret" a secret. This key should never be human-readable in your application.

Access level	Read-only About the application permission model
Consumer key	IuKFhJM5c2nRgyx2SZWQ
Consumer secret	TQ32FrNFhYWrwzIGw?hJM5c2nRgyx2FrNFhYWrwzIGw

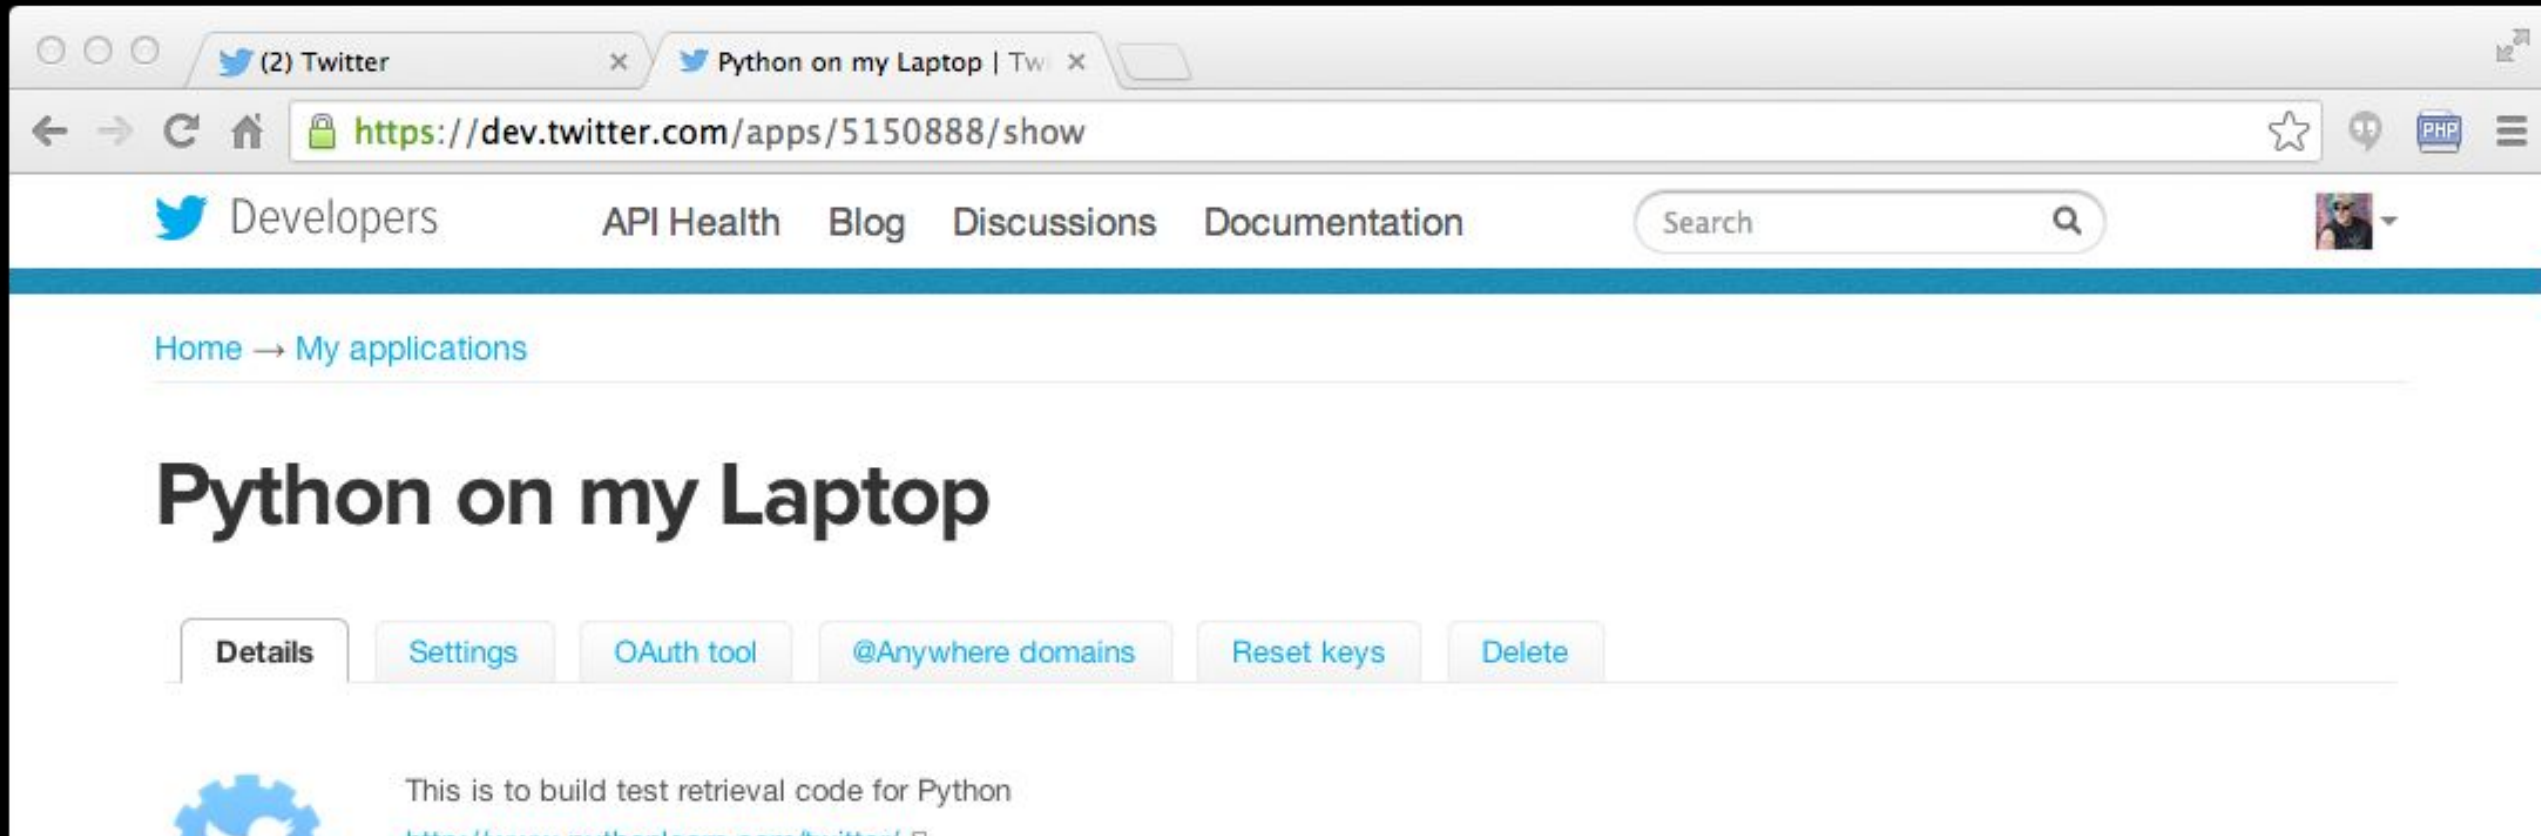

```
def oauth() : hidden.py  
    return { "consumer_key" : "h7Lu...Ng",  
            "consumer_secret" : "dNKenAC3New...mmn7Q",  
            "token_key" : "10185562-ein2...P4GEQQOSGI",  
            "token_secret" : "H0ycCFemmwyf1...qoIpBo" }
```

OAuth settings

Your application's OAuth settings. Keep the "Consumer secret" a secret. This key should never be human-readable in your application.

Access level	Read-only About the application permission model
Consumer key	IuKFhJM5c2nRgyx2S2WQ
Consumer secret	TQ32FrNFhYWrwzIGw?hJM5c2nRgyx2FrNFhYWrwzIGw

Twitter

OAuth | Twitter Developers

← → ↺ 🏠

https://dev.twitter.com/docs/auth/oauth

☆ 🗨️ PHP ☰

🐦 Developers

API Health

Blog

Discussions

Documentation

Search

Sign in

Home → Documentation

🐦 Tweet

OAuth

View

What links here

Updated on Mon, 2013-03-11 12:22


API version 1

API version 1.1

Related Questions

Send secure authorized requests to the Twitter API

Twitter uses OAuth to provide authorized access to its API.



Tags

OAuth (178)

Auth (31)

Features

Secure - Users are not required to share their passwords with 3rd party applications, increasing account security.

Standard - A wealth of client libraries and example code are compatible with Twitter's OAuth implementation.

API and the Authentication Model

```
import urllib
import oauth
import hidden

def augment(url, parameters) :
    secrets = hidden.oauth()
    consumer = oauth.OAuthConsumer(secrets['consumer_key'], secrets['consumer_secret'])
    token = oauth.OAuthToken(secrets['token_key'], secrets['token_secret'])
    oauth_request = oauth.OAuthRequest.from_consumer_and_token(consumer,
        token=token, http_method='GET', http_url=url, parameters=parameters)
    oauth_request.sign_request(oauth.OAuthSignatureMethod_HMAC_SHA1(), consumer, token)
    return oauth_request.to_url()
```

```
https://api.twitter.com/1.1/statuses/user_timeline.json?
count=2&oauth_version=1.0&oauth_token=101...
SGI&screen_name=drchuck&oauth_nonce=09239679&oauth_timestamp=13
80395644&oauth_signature=rLK...BoD&oauth_consumer_key=h7Lu...
GNg&oauth_signature_method=HMAC-SHA1
```

Summary

- Service Oriented Architecture - allows an application to be broken into parts and distributed across a network
- An Application Program Interface (API) is a contract for interaction
- Web Services provide infrastructure for applications cooperating (an API) over a network - SOAP and REST are two styles of web services
- XML and JSON are serialization formats



Acknowledgements / Contributions



These slides are Copyright 2010- Charles R. Severance (www.dr-chuck.com) of the University of Michigan School of Information and open.umich.edu and made available under a Creative Commons Attribution 4.0 License. Please maintain this last slide in all copies of the document to comply with the attribution requirements of the license. If you make a change, feel free to add your name and organization to the list of contributors on this page as you republish the materials.

Initial Development: Charles Severance, University of Michigan School of Information

... Insert new Contributors here

...