


図面／規格
【Grooved nut (high type (2 types))】

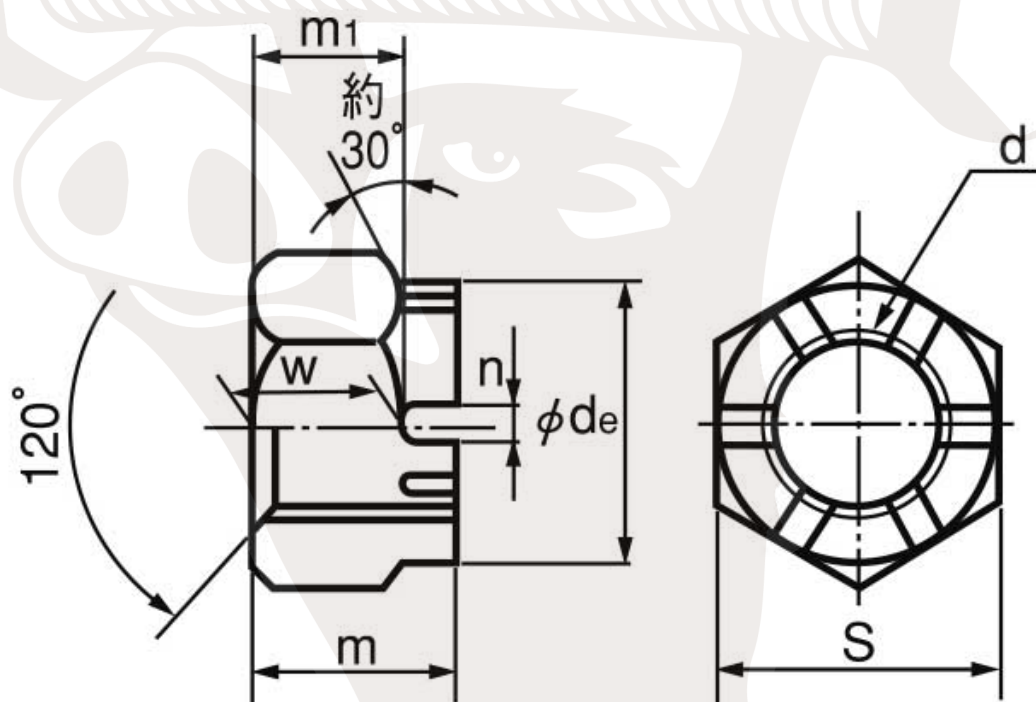

ねじの 呼び (d)	m		w		m1	S	φde	n	(参考)
	基準 寸法	許容差	基準 寸法	許容差	約	基準 寸法	約	基準 寸法	割ピンの 寸法
M10	12	0 -0.7	8	0	-	17	-	2.8	2.5X25
M12	15		10	-0.58	10	19	17	3.5	3.2X25
M14	16		11	0 -0.70	11	22	19		3.2X28
M16	19	0 -0.84	13		13	24	22	4.5	4X32
M18	21		15		15	27	25		4X36
M20	22		16	0 -0.84	16	30	28	5.5	4X40
M22	26	0 -1.0	18		18	32	30		5X40
M24	27		19		19	36	34	7	5X45
M27	30		22	0 -1.0	22	41	38		5X50
M30	33	0 -1.2	24		24	46	42	9	6.3X56
M33	35		26		26	50	46		6.3X63
M36	38		29	0 -1.2	29	55	50	11	6.3X71
M39	40	0 -1.2	31		31	60	55		8X71
M42	46		34		34	65	58	11	8X80
M45	48		36	0 -1.2	36	70	62		8X90
M48	50	0 -1.2	38		38	75	65	11	10X100
M52	54		42		42	80	70		10X112
M56	57	0 -1.2	45	0 -1.2	45	85	75	11	10X125
M60	63		48		48	90	80		10X140
M64	66		51		51	95	85	11	
M68	69	0 -1.2	54		54	100	90		
M72	73		58		58	105	95	11	
M76	76		61		61	110	100		
M80	79		64		64	115	105	11	