


Drawing / Standard
【 (+) Pan Head Screw Sems P=2 】

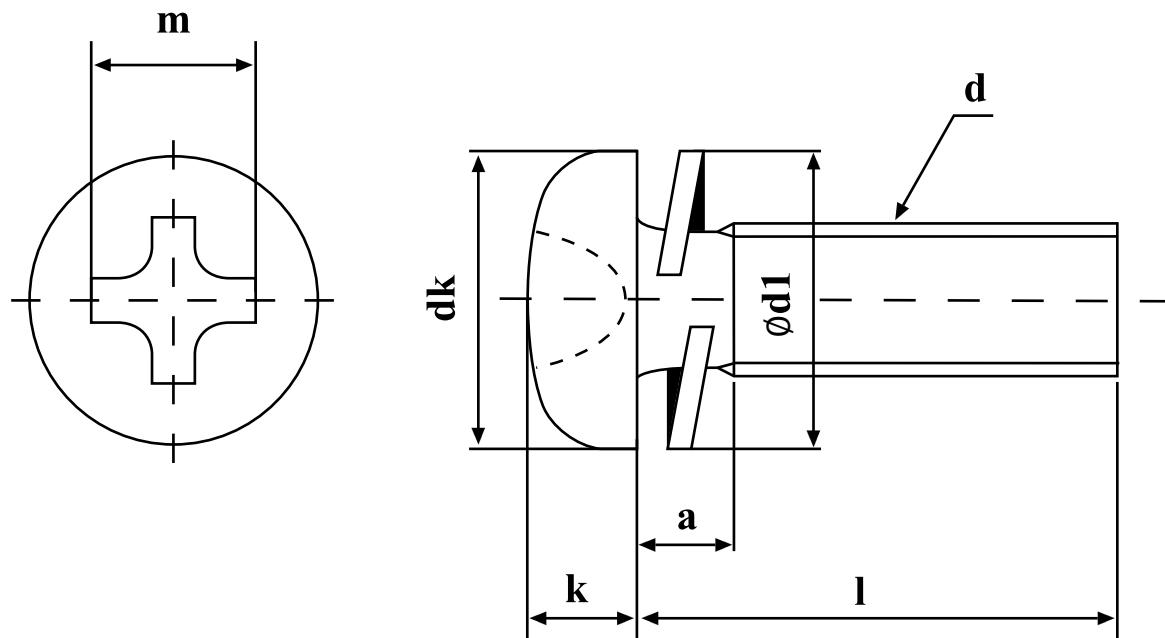

Nominal size (d)	dk		k		Cross Recessed Hole		Flat washer d1	a
	Dimension	Tolerance	Dimension	Tolerance	Driver size	m (Reference)		
M2	3.5	$\begin{matrix} 0 \\ -0.4 \end{matrix}$	1.3	± 0.1	1	2.2	4	1.8
M2.3	4		1.5		1	2.4	4.6	2.0
M2.5	4.5		1.7		1	2.6	4.8	2.1
M2.6	4.5		1.7		1	2.6	4.8	2.1
M3	5.5	$\begin{matrix} 0 \\ -0.5 \end{matrix}$	2	± 0.15	2	3.6	5.5	2.4
M3.5	6		2.3		2	3.9	6.2	2.8
M4	7		2.6		2	4.2	7	3.5
M5	9	$\begin{matrix} 0 \\ -0.6 \end{matrix}$	3.3		2	4.9	8.5	4.3
M6	10.5	$\begin{matrix} 0 \\ -0.7 \end{matrix}$	3.9	± 0.2	3	6.3	11.5	5.1
M8	14	$\begin{matrix} 0 \\ -0.8 \end{matrix}$	5.2		3	7.8	14.5	6.7
M10	19	$\begin{matrix} 0 \\ -1.5 \end{matrix}$	6	± 1	4	9.4	17.5	8.2