


Drawing / Standard
【Pan Head Screw (+)】

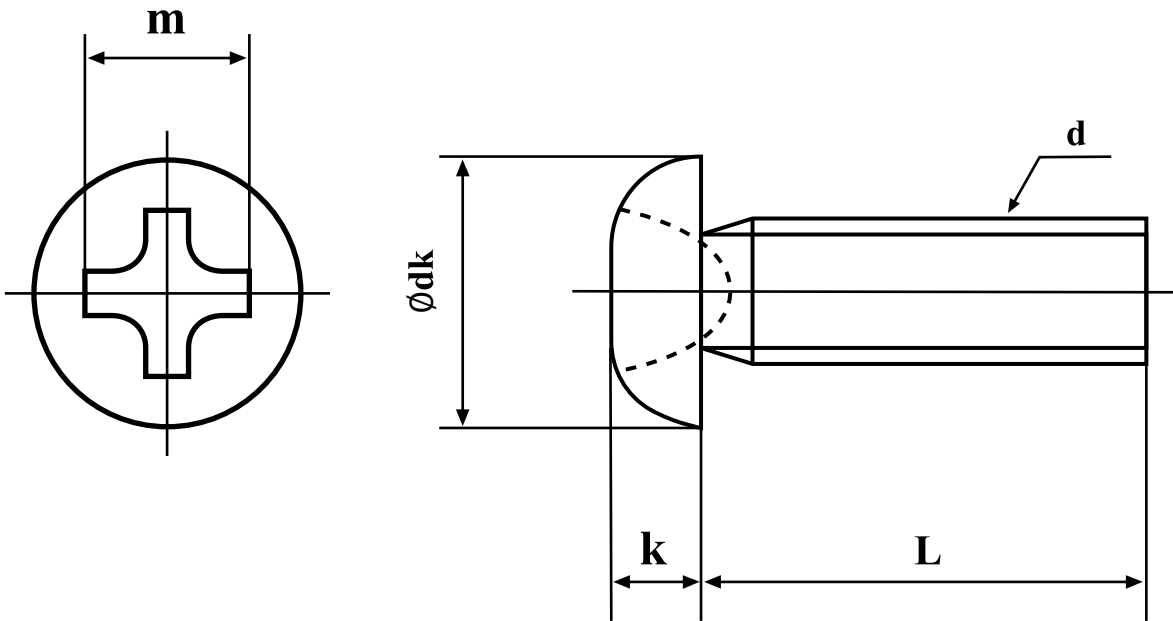

| Normal size (d) | Pitch | Cross hole number | dk | | K | | m | q (Cross recess hole depth) | |
|--------------------|-------|-------------------------|-----------|-----------|-----------|-----------|----------------|-----------------------------|------|
| | | | Dimension | Tolerance | Dimension | Tolerance | Reference | Max. | Min. |
| M2 | 0.4 | 1 | 3.5 | 0 -0.4 | 1.3 | ±0.1 | 2.2 | 1.01 | 0.60 |
| M2.3 | 0.4 | | 4 | | 1.5 | | 2.4 | 1.21 | 0.80 |
| M2.5 | 0.45 | | 4.5 | | 1.7 | | 2.6 | 1.42 | 1.00 |
| M2.6 | 0.45 | | 4.5 | | 1.7 | | 2.6 | 1.42 | 1.00 |
| M3 | 0.5 | 2 | 5.5 | 0 -0.5 | 2 | ±0.15 | 3.6 | 1.43 | 0.86 |
| M3.5 | 0.6 | | 6 | | 2.3 | | 3.9 | 1.73 | 1.15 |
| M4 | 0.7 | | 7 | | 2.6 | | 4.2 | 2.03 | 1.45 |
| M5 | 0.8 | | 9 | | 3.3 | | 4.9 | 2.73 | 2.14 |
| M6 | 1.0 | 3 | 10.5 | 0 -0.7 | 3.9 | ±0.2 | 6.3 | 2.86 | 2.26 |
| M8 | 1.25 | | 14 | 0 -0.8 | 5.2 | | 7.8 | 4.36 | 3.73 |
| M10 | 1.5 | 4 | 19 | 0 -1.5 | 6 | ±1 | 9.4 | 5.10 | 4.30 |
| M12 | 1.75 | | 22 | | 7.5 | ±0.5 | 10.16 10.49 | 6.10 | 5.10 |