


図面／規格  
【Hard lock nut (fine)】

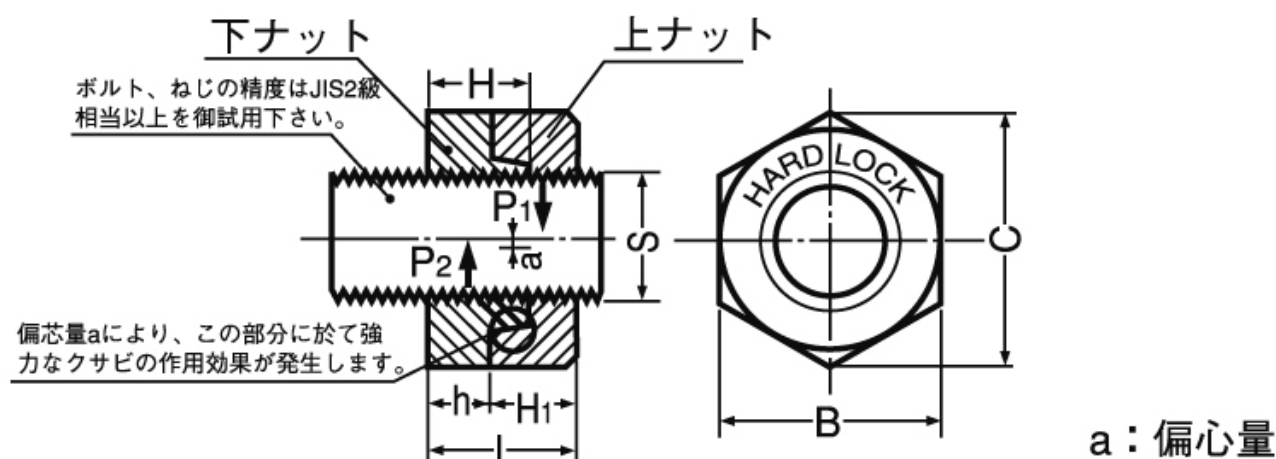

S 呼び径	ピッチ		H(下ナット)		H1(上ナット)		B(二面幅)		C	L(全高)	セット重量
	並目	細め	基準寸法	許容差	基準寸法	許容差	基準寸法	許容差	約	約	(g)
M8	1.25	1.0	6.5	±0.58	6.5	±0.58	13	0	15	11	8.6
M10	1.5	1.25	8		8		17	-0.7	19.6	13	17.6
M12	1.75	1.25	10		10		19	0 -0.8	21.9	17	27.3
M14	2.0	1.5	11	±0.7	11	±0.7	22		25.4	18	39.0
M16	2.0	1.5	12	±0.8	12	±0.8	24		27.7	20	52.8
M18	2.5	1.5	14		14		27	0 -1.0	31.2	24	80.0
M20	2.5	1.5	15		15		30		34.6	25	105
M22	2.5	1.5	17	±0.9	17	±0.9	32	0 -1.0	37	29	130
M24	3.0	2.0	18		18		36		41.6	31	180
M27	3.0	2.0	21		21		41	0 -1.2	47.3	36	246
M30	3.5	2.0	23	±0.12	23	±0.12	46		53.1	40	375
M33	3.5	2.0	25		25		50		57.7	43	480
M36	4.0	3.0	28		28		55	0 -1.4	63.5	48	630
M39	4.0	3.0	30	±0.15	30	±0.15	60		69.3	51	935
M42	4.5	4.0	33		33		65		75	57	1,080
M45	4.5	4.0	35		35		70	0	80.8	61	1,330
M48	5.0	4.0	37	±0.12	37	±0.12	75		86.5	65	1,595
M52	5.0	4.0	41		41		80		92.4	72	2,055
M56	5.5	4.0	44		44		85	0	98.1	77	2,410
M64	6.0	4.0	50	±0.15	50	±0.15	95	-1.4	110	87	3,172