

1. API definition	2
1.1 Change Control	3
1.2 Introduction	7
1.3 Communication	8
1.3.1 Connectivity	9
1.3.2 Transport Protocol	10
1.3.3 Message Format	11
1.3.4 Requests to Terminal	12
1.3.5 Responses from terminal	13
1.3.6 Mac calculation	14
1.4 Terminal Setup and Pairing	15
1.4.1 Flow	16
1.4.2 Keys	17
1.4.2.1 KTK	18
1.4.2.2 Mac key	19
1.4.2.3 Mac Key Exchange	20
1.5 Session Management	21
1.5.1 General Transaction Flow	22
1.5.2 Basket Session Flow	23
1.6 POS Initiating Messaging Interface	25
1.6.1 Administrative calls	26
1.6.1.1 Ping	27
1.6.1.2 Register POS	29
1.6.1.3 Exchange Keys	31
1.6.1.4 Status	32
1.6.1.5 Close Lane	35
1.6.1.6 EOD	36
1.6.1.7 Open Lane	38
1.6.1.8 Erase SHVA Parameters	40
1.6.2 Session calls	41
1.6.2.1 Start Transaction	42
1.6.2.2 Add Line Item	44
1.6.2.3 Replace Line Item	47
1.6.2.4 Basket Finalized	50
1.6.2.5 Basket Summary	52
1.6.2.6 Extended Promotions	54
1.6.2.7 Payment Completed	56
1.6.2.8 Finish Transaction	57
1.6.3 Payment calls	58
1.6.3.1 Send Batch - TBD	59
1.6.3.2 Load	60
1.6.3.3 Debit Withdrawal	62
1.6.3.4 Token Query	64
1.6.3.5 Pay Electricity Bill	65
1.6.3.6 Pay Phone Bill	66
1.6.3.7 Authorize	67
1.6.3.8 Discover	75
1.6.4 Device Calls	80
1.6.4.1 Read Card Data	81
1.6.4.2 Capture Loyalty	83
1.6.4.3 Signature Capture	86
1.6.4.4 PAN Capture	88
1.6.4.5 Customer Id Capture	90
1.6.4.6 Cell Transactions Password Capture	91
1.6.4.7 Customer Survey	93
1.6.4.8 Custom Display	94
1.6.4.9 Custom Image Display	96
1.6.4.10 Enhanced Signature Capture	97
1.6.4.11 Approve Signature	100
1.6.4.12 User approval	101
1.6.5 Report calls	103
1.6.5.1 Transaction Authorizations	104
1.6.5.2 Last Authorization	106
1.6.5.3 Get Transaction Details	111
1.6.6 General calls	114
1.6.6.1 Cancel	115
1.6.6.2 Reboot Device	116
1.6.6.3 MIFAL_PAIS	117
1.6.6.4 SET TERMINAL LOCALE	119
1.6.6.5 FORCE OFFLINE	122
1.7 Terminal Initiating Messaging Interface	123
1.7.1 General	124
1.7.2 Commerce Platform calls	125
1.7.2.1 Print	126
1.7.2.2 Append Receipt	127
1.7.2.3 Send Data to POS	128
1.8 Appendix A – Result Codes	129
1.9 Appendix B - Main Club definition	132
1.10 Session commands states	134

API definition

Change Control

Version		Changes	Change By
2.2.4		Appendix A – Result_Error Codes PHASE 2 Discover Last Authorization EOD Basket Summary Reboot Device Transaction Authorizations Erase SHVA Parameters Basket Management Use Case Authorization Use Case Basket Finalized Custom Image Display Custom Display Open Lane Appendix B - Main Club definition PHASE 3 Extended Promotions Payment Completed Load Debit Withdrawal Cell Transactions Password Capture Print Append Receipt Send Data to POS	Leor Hurwitz
UxV1		Register POS Discover	Leor Hurwitz
2.2.11		Appendix B - Main Club definition Read Card Data Message Format Signature Capture EOD Open Lane Authorize Basket Finalized Last Authorization Discover	Leor Hurwitz
2.2.14		Last Authorization Discover Authorize Transaction Authorizations	Leor Hurwitz

2.2.15		Last Authorization Authorize	Leor Hurwitz
2.2.16		Authorize	Leor Hurwitz
2.2.17		Basket Finalized Authorize	Leor Hurwitz
2.2.18		Authorize Last Authorization Discover	Leor Hurwitz
2.2.20		Last Authorization Authorize	Leor Hurwitz
2.2.21		Appendix A – Result_Error Codes	Leor Hurwitz
2.2.22		EOD Appendix A – Result_Error Codes Discover	Leor Hurwitz
2.2.23		Last Authorization Authorize Status	Leor Hurwitz
2.2.25		Last Authorization Transaction Authorizations Authorize Appendix A – Result_Error Codes	Leor Hurwitz
2.2.29		Authorize Last Authorization	Leor Hurwitz
2.2.30		Authorize Last Authorization Discover	Leor Hurwitz
2.2.33		Capture Loyalty	Leor Hurwitz
2.2.35		Open Lane EOD	Leor Hurwitz
2.2.39		Discover EOD	Leor Hurwitz
2.2.40		Transaction Authorizations	Leor Hurwitz
2.2.41		Authorize	Leor Hurwitz
2.2.42		EOD Authorize	Leor Hurwitz
2.2.43		Start Transaction (Added option to disable the screen) Finish Transaction (Added option to disable the screen + error code 209) Status (added Serial number to the response) Authorize (clarification on receipt_arr and print_receipt in the comments + added terms_derfer) Fixed inconsistency of CARD_NAME (format = Base64) Finish Transaction (Now RESULT_CODE 208 in AGGREGATED_CODE 2, RESULT_CODE 209 in AGGREGATED_CODE 5)	Yossi Eldad Lotan Ganot
2.2.44		Authorize - Added support for Shva Z-DATA field	Lotan Ganot

FB1.0.5		Discover Add restrict token property to request + TRANS_ID to response + PAN with no leading zeros Start Transaction + Finish Transaction added show Screen Get Transaction Details - new call Register POS - Chain and Lane max size was increased Appendix A – Result_Error Codes - added error code 210	Yossi Eldad (changes done by Lotan Ganot)
FB1.0.7		Approve Signature - added trans_id + error codes + additional explanation added the field GW_CODE to the following commands: Get Transaction Details, Last Authorization, Transaction Authorizations, Approve Signature, Signature Capture, Capture Loyalty, Token Query, Authorize, Close Lane, EOD Changed the values of restrict_token in Token Query Add description of already existing field FULL_PAN in Discover Added TMS parameters download indication to Status	Yossi Eldad
FB1.0.8		Get Transaction Details - enhanced the response to a detailed format User approval - added Authorize - added force include field and removed ORIG_TRAN_ID and ORIG_TRAN_DATE Token Query - added result code 100 Appendix A – Result_Error Codes - changed 100 description	Yossi Eldad
FB1.0.9		Discover -added fileNo to the response Authorize - changed request batch_id type	Yossi Eldad
FB1.0.10		EOD - Removed predecessor validation (error code 203) Appendix B - Main Club definition - added new Shufersal bin Terminal Boarding Use Case - added new parameter that control bin list to ignore when tokenizing Discover, Token Query, Capture Loyalty - edited the CARD_TOKEN to clarify when a token is created	Yossi Eldad
FB1.0.11		Terminal Boarding Use Case - added new vhf parameters Discover - added the field HASHED_CARD in the request and response Authorize - changed the type of BATCH_ID and added BATCH_DATE field + change the format of TRAN_TIME_STAMP	Yossi Eldad
FB1.0.12		EOD - added BATCH_DATE Discover - added CREDIT_MIN_AMOUNT	Yossi Eldad
FB1.0.12.7		Authorize, Discover - added Trans_id field Discover - TRANS_AMOUNT can be 0	Yossi Eldad
FB1.0.12.8		Register POS - added error code 93 +94	Yossi Eldad
FB1.1.0.05		Register POS - added error code 4 EOD - added result code 300	Denis Danskir Yossi Eldad
FB3.0.11		EOD, Status - added EMV_CONFIG Authorize - added signature filed	Yossi Eldad
TBD		Discover - added result code 210 and validation Authorize - fixed documentation issue and added result code 10	Yossi Eldad
	12.12.2021	Authorize - • Add Addendum3Settl in Request and Response • Add Addendum4Settl in Request and Response • Add Track2 data in response if POS_PCI flag is true • Add Field55 in response if POS_PCI flag is true • Add Routing_code in request	Alexey Balykin

SB3. 3.5.0001	15.06.20 22	Authorize - New filed in Response - Loyalty Code	Alexey Balykin
	22.06.20 22	Discover - New filed in Response - Loyalty Code Authorize - New MAX value for BATCH_ID filed Discover - Add Voice_Auth indication	

Introduction

This document describes the API to the MX925 terminal for use in different phases of the Shufersal PIN pad program. It is based on the cumulative experience of Verifone worldwide and the especially SCA protocol. SCA serves 140 plus POS solutions integrated and over 380 merchants representing over 100,000 terminals and growing live on this solution and interface.

The purpose of this document is to:

- Define a terminal interface to support integration of Verifone MX925 to NCR POS system using a common interface
- Define the security protocol to establish and maintain the authenticity of messages between applications residing on POS systems and the applications residing on the terminal

Summarizing table of API commands by project phase can be found in appendix B.

Communication

Connectivity

Payment acceptance devices will have Estate Management functionality. Outbound firewall access is required. Verifone will provide a list of Internet visible host names to integrators and merchants so that outbound traffic is allowed out of the merchant environments. Verifone will also provide integration and testing host names to integrators.

Transport Protocol

Verifone will use TCP/IP network sockets to accept request(s) from the POS and will respond on the same open socket session. It is the responsibility of the POS to close the connection when no further requests need to be handled. The TCP Port for communication between Verifone devices and POS systems is 5015.

Message Format

All Verifone messages (requests and responses) should be fully formed XML documents compliant to the

Example

```
<DOCUMENT_ELEMENT>
<ELEMENT />
<ELEMENT>TEXT CONTENT</ELEMENT>
<ELEMENT>TEXT CONTENT</ELEMENT>
<ELEMENT>
<ELEMENT>TEXT CONTENT</ELEMENT>
</ELEMENT>
</DOCUMENT_ELEMENT>
```

Empty elements are represented by form <ELEMENT />, not <ELEMENT></ELEMENT>.

Note: XML Request messages must be entirely upper case – with the exception of customizable text values.

Data Types

Type	Description	Min	Max
Type B	Boolean (1, 0)	N/A	N/A
Type C	Character (Alphanumeric)	Minimum number of characters	Maximum number of characters
Type D	Date (YYYY.MM.DD)	N/A	N/A
Type E	Base64 Encoded Data	N/A	N/A
Type F	Floating point number (decimal)	Format: D(C) D = minimum number of digits left of decimal C = minimum number of digits right of decimal	Format: D(C) D = maximum number of digits left of decimal C = maximum number of digits right of decimal
Type L	List - (select from) list of valid values	N/A	N/A
Type N	Numeric	Minimum number of digits	Maximum number of digits
Type S	Static value	N/A	N/A
Type T	Time (00:00:00)	N/A	N/A

Rules

Rule	Description
Rule R / M	Required / Mandatory - Required in all cases
Rule O	Optional - Required in no cases
Rule C	Conditional – Required in some cases (See Comments column)

If a request is received with a mandatory field missing, there will be an error in the xml.

If the request is received with a conditional field empty, but the condition exists, an error will be thrown.

Requests to Terminal

All request messages should have a document element of REQUEST. Each field name should be represented by a child element's tag name and the text content should represent that field's value. The following elements are required for all requests.

Field	Comments
FUNCTION_GROUP	Type of function performed. Function types group COMMANDs into logical categories
COMMAND	Command requested
SESSION_ID	16 chars number used for debugging and not validated by the terminal
TRAINING_MODE	A Boolean indication for training mode. Currently affect Capture call functionality only.
TRANSACTION_TIME	MM.DD.YYYY HH:MM:SS format Used for authenticating the POS. Terminal will validate that the time is later than the previous received transaction. Please note that terminal date and time is only manually controlled by Verifone technician in phase I and on phase II will update by VHQ
MAC	Used for authenticating the POS. MAC value of the message using the decrypted MAC_KEY returned from the Register call. This value is Base64 encoded. POS that implement authentication on the network level will not send MAC values

Example

```
<TRANSACTION>
<FUNCTION_GROUP>ADMIN</FUNCTION_GROUP>
<COMMAND>REGISTER</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>04.10.2016 10:22:23</TRANSACTION_TIME>
<MAC>...</MAC>
<POS_DETAILS>
<STORE>12345</STORE>
<LANE>12</LANE>
</POS_DETAILS>
</TRANSACTION>
```

Responses from terminal

All responses will have a document element of RESPONSE. Each RESPONSE element has at least the following fields

Field	Comments
FUNCTION_GROUP	FUNCTION_GROUP element from the request
COMMAND	COMMAND element from the request
SESSION_ID	Echo form request
TRAINING_MODE	Echo form request
EVENT	Current processing stage: STARTED - received the request and starting to process READING_CARD - the customer entered\swiped the card WAITING_FOR_PIN - waiting for the customer to enter pin (relevant from phase II) AUTHORIZING - calling SHVA to authorize (relevant from phase II) DOWNLOADING - updating software, parameters or media (relevant from phase II) COMPLETED - finished processing the transaction
EVENT_TIME	Terminal will send the value of TRANSACTION_TIME from the request Used to authenticate the terminal. POS should validate that the time is greater than the previous command (and not event!!!) Please note that terminal date and time is only manually controlled by Verifone technician in phase I and on phase II will update by VHQ
MAC	Used to authenticate the terminal. MAC value of the message using the decrypted MAC_KEY returned from the REGISTER command. This value is Base64 encoded.

Example

```
<RESPONSE>
<FUNCTION_GROUP>ADMIN</FUNCTION_GROUP>
<COMMAND>HEALTH</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<FUNCTION_TYPE>START</FUNCTION_TYPE>
<EVENT>COMPLETED</EVENT>
<EVENT_TIME>04/10/2016 12:55:09</EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
</RESPONSE>
```

Mac calculation

The terminal will use a Hash-based message authentication code to verify message authenticity. The hashing algorithm is SHA256. The hashed string is the value of MAC_KEY appended to transaction XML without the MAC element.

MAC Example

MAC key: w2e3r4t5y6u7i8o9

Transaction XML: <TRANSACTION>

<FUNCTION_GROUP>ADMIN</FUNCTION_GROUP>

<COMMAND>STATUS</COMMAND>

<SESSION_ID>0000000000000001</SESSION_ID>

<TRAINING_MODE>0</TRAINING_MODE>

<TRANSACTION_TIME>04.10.2016 10:22:23</TRANSACTION_TIME>

<MAC>...</MAC>

</TRANSACTION>

String for SHA: <TRANSACTION>

<FUNCTION_GROUP>ADMIN</FUNCTION_GROUP>

<COMMAND>STATUS</COMMAND>

<SESSION_ID>0000000000000001</SESSION_ID>

<TRAINING_MODE>0</TRAINING_MODE>

<TRANSACTION_TIME>04.10.2016 10:22:23</TRANSACTION_TIME>


</TRANSACTION>w2e3r4t5y6u7i8o9

MAC: c5ce56d42732c505fdd57c89a3ed2511f6ff38fc57978f75f844491a16f17fba

Terminal Setup and Pairing

Flow

The first communication between a POS application and a device is a pairing that will also serve as a key exchange. The purpose of this pairing is to establish a level of trust that transaction requests are coming from a POS system that is authorized to send transaction requests to the terminal. It is not meant to protect cardholder data. This pairing of POS to device should happen in the following manner:

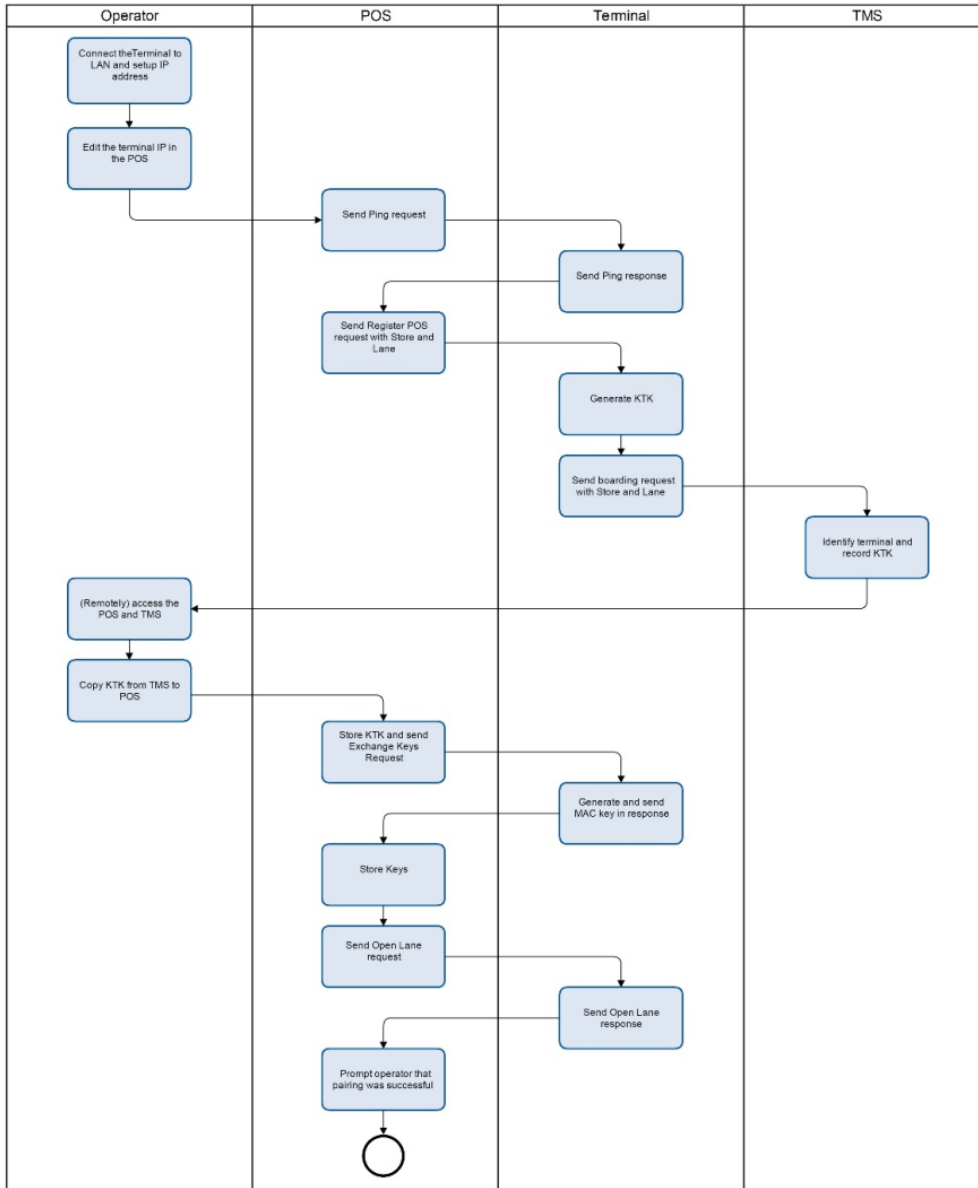

POS that connect directly to the terminal (via USB for example) can skip the Pairing process and MAC authentication. Terminal validation of mac is configurable.

When pairing process was initiated by the POS, the terminal assume that all prior definitions are not relevant any more:

- Open/Close lane state will be deleted and the terminal will expect open lane
- Last transaction time will be deleted and the terminal allow transactions with any date and time
- Session will be terminated and the terminal will expect start transaction.

Keys

KTK

MX Devices

KTK's size is 16 byte. In order to simplify the technician part on the boarding process, the terminal will generate 8 byte key and the technician will enter them manually to the POS. During key exchange (Register) the terminal will multiply the KTK so it will be 16 byte while encrypting the MAC key.

UX Devices

KTK's size is 16 byte. During the registration call, this is returned in the response, and is used in the exchange keys call, thereby avoiding technician input on devices with no keyboard or screen.

Mac key


Mac key is 16 byte characters.

Mac Key Exchange

After generating the MAC key, the terminal will encrypt it with the KTK and 3DES algorithm and send

Session Management


General Transaction Flow

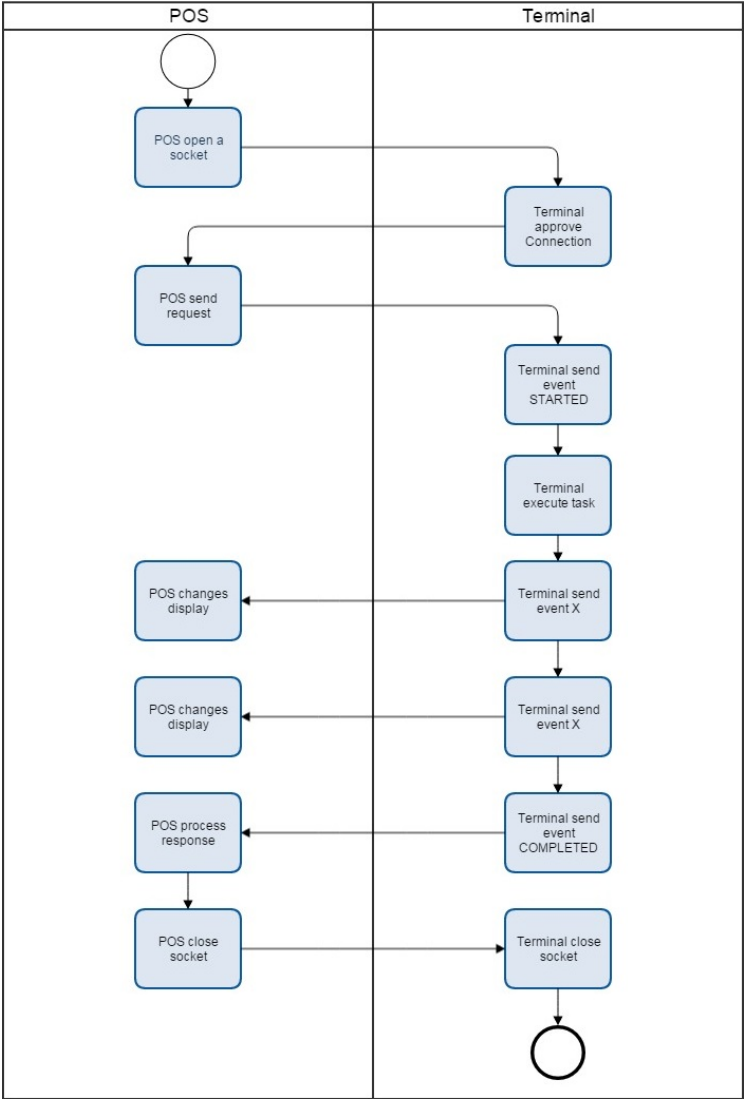

Basket Session Flow

The following diagram describe the commands that POS is calling during a basket session.
The basket session is made of four main parts:

- Customer loyalty data - by card or manually
- Line Items adding – merchandise or promotions
- Payment – several payments are possible using discovery for getting card data, authorize for J4 and capture for marking the payment for settlement in terminal's local batch
- Finish – ending local transaction and sending capture data to the GW

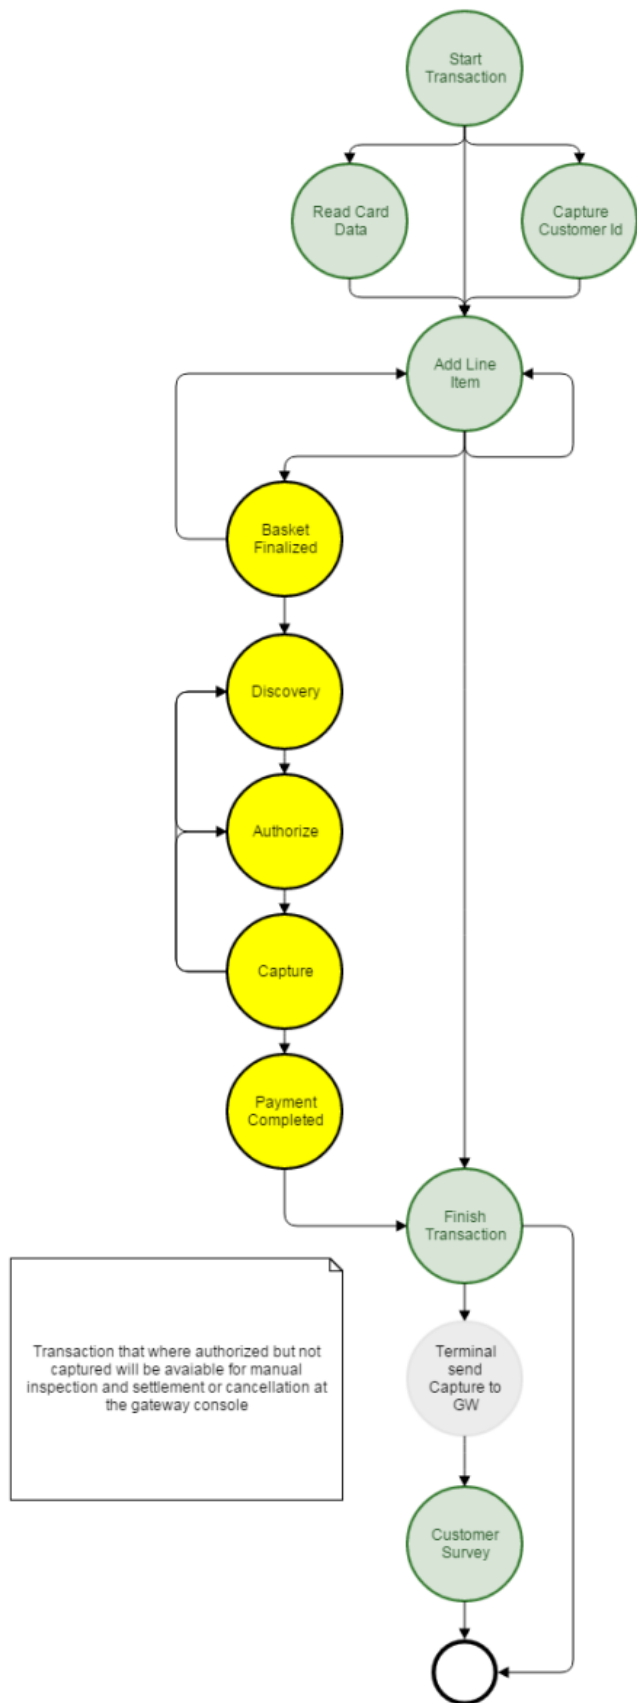

*Yellow states are not relevant for phase I.

POS Initiating Messaging Interface

Administrative calls

Ping

This command tests the connection between the POS and the terminal without MACing

Ping Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	ADMIN	
2	COMMAND	R	S	-	-	PING	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		

Ping Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	ADMIN	
COMMAND	S	PING	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
RESULT_CODE	N	0, 2, 8, 9,3	See Appendix A
CHAIN_ID	N		Prefix of location id in TMS
STORE_ID	N		Store id from location id in TMS
LANE_ID	N		Terminal id from location id in TMS
TMS_MERCHANT_NAME	C		Merchant name as configured in TMS Parameters
DEV_SERIAL	C		Serial Number as configured in TMS Parameters
MODEL	C		Model name as configured in TMS Parameters
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (2,8,9) 101 – Busy (3)	

Request:

```
<TRANSACTION>
<FUNCTION_GROUP>ADMIN</FUNCTION_GROUP>
<COMMAND>PING</COMMAND>
<SESSION_ID>259</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
</TRANSACTION>
```

Response:

```
<RESPONSE>
<FUNCTION_GROUP>ADMIN</FUNCTION_GROUP>
<COMMAND>PING</COMMAND>
<SESSION_ID>259</SESSION_ID>
```

<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
<RESULT_CODE>0</RESULT_CODE>
<GW_CODE>0</GW_CODE>
<CHAIN>69999</CHAIN>
<STORE>1234</STORE>
<LANE>104</LANE>
<TMS_MERCHANT_NAME>Nir GC</TMS_MERCHANT_NAME>
<DEV_SERIAL>804-934-534</DEV_SERIAL>
<MODEL>P400 Plus</MODEL>
<POS_TEXT> </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>

Register POS

This command starts the pairing process by indicating the terminal to generate and display a KTK and sending the Store and Lane.
In phase II, if the register has started in the middle of a session after payment were done they will be sent to the server as not captured transactions.

FOR UX: KTK is returned in response

Register POS Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	ADMIN	
2	COMMAND	R	S	-	-	REGISTER	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	CHAIN	O	N	1	99999		Overrides the value from configuration if sent from POS. Terminal should not pad the value if length is less than 5
6	STORE	O	N	1	9999	EX:123	Store number. Terminal will always pad with zeros to 4 digits
7	LANE	O	N	1	999	Ex:12	Lane number. Terminal will always pad with zeros to 3 digits
8	POS_TYPE	O	L	-	-	EX: ATTENDED	ATTENDED, UNATTENDED, PHARMACY
9	TID	O	S	-	-		Alternate terminal identification (terminal configuration will decide the identification method)

Register POS Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	ADMIN	
COMMAND	S	REGISTER	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, DOWNLOADING, COMPLETED	
RESULT_CODE	N	0, 2, 3, 8, 9, 90, 93, 94, 4	See Appendix A
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (2,8,9,90, 93) 2 - Transaction Failed (4) 5- Completed with warning (94) 101 – Busy (3)	
KTK	N		FOR UX Devices with no screen

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>ADMIN</FUNCTION_GROUP>
<COMMAND>REGISTER</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<STORE>223</STORE>
<LANE>51111</LANE>
<POS_TYPE>ATTENDED</POS_TYPE>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>ADMIN</FUNCTION_GROUP>
<COMMAND>REGISTER</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
<RESULT_CODE>0</RESULT_CODE>
<POS_TEXT>    </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```

Exchange Keys

This command generate MAC key, encrypt them with KTK in terminal side and send them back to POS

Register POS Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	ADMIN	
2	COMMAND	R	S	-	-	EXCHANGE_KEYS	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		

Register POS Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	ADMIN	
COMMAND	S	EXCHANGE_KEYS	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
RESULT_CODE	N	0, 1, 2, 3, 8, 9	See Appendix A
MAC_KEY	E		
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 101 – Busy (3)	

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>ADMIN</FUNCTION_GROUP>
<COMMAND>EXCHANGE_KEYS</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>ADMIN</FUNCTION_GROUP>
<COMMAND>EXCHANGE_KEYS</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
<RESULT_CODE>0</RESULT_CODE>
<MAC_KEY>...</MAC_KEY>
<POS_TEXT>    </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```

Status

This command queries the status of a device.

Status Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	ADMIN	
2	COMMAND	R	S	-	-	STATUS	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		

Status Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	ADMIN	
COMMAND	S	STATUS	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9	See Appendix A
SHVA_STATUS	L	1,2,3	Relevant for phase II 1 Update completed successfully 2 No updates needed 3 Update failed This checks that the parameters for the last 3 days have been transmitted to SHVA. In other words, if last transmission was more than 3 days ago, and the last update was failure, then 3. If Less than 3 days, then 2, and if the last update was successful, then 1.
DEBIT_STATUS	L	READY NOT OPERATIONAL	Relevant for phase III
APP_VERSION	C		Verifone IL Payment Application Version - Format: PPx_y_z_b PP - Platform Name (2 letters) x - Major (up to 2 digits) y - Minor (up to 2 digits) z - Release Candidate (up to 2 digits) b - Build Number (up to 4 digits) Example: FB1_0_5_9876
PAYMENT_VERSION-ASHRAIT_VERSION	C		Relevant for phase II
DEBIT_VERISON	C		Relevant from phase III
IS_LANE_OPEN	B		Whether the lane is open or not
IS_SESSION_OPEN	B		Whether there is an open session or not
SHVA_TERM_ID	C		SHVA terminal id from local parameters. This is only the default terminal id and can be changed due to transaction details mapping in the GW

WEAVER_ID	C		Weaver terminal ID from local parameters.
SERIAL_NUMBER	C		Terminal serial number
PARAM_DWLD_IND	B		Indication whether VHQ parameters were downloaded.
EMV_CONFIG	E		• 1 = Full EMV • 2 = MSR Only • 3 = other • 4= no shva parameters (in case the terminal do not have the parameter s)
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 101- Busy	

<TRANSACTION>

<FUNCTION_GROUP>ADMIN</FUNCTION_GROUP>

<COMMAND>STATUS</COMMAND>

<SESSION_ID>22</SESSION_ID>

<TRAINING_MODE>0</TRAINING_MODE>

<TRANSACTION_TIME>07.24.2022 11:40:08</TRANSACTION_TIME>

<MAC>Cfqc0go98YSjbs++T8RSMmcCazxGyd5uUD7CFZRTuZI=</MAC>

</TRANSACTION>

<RESPONSE>

<FUNCTION_GROUP>ADMIN</FUNCTION_GROUP>

<COMMAND>STATUS</COMMAND>

<SESSION_ID>22</SESSION_ID>

<TRAINING_MODE>0</TRAINING_MODE>

<EVENT>STARTED</EVENT>

<GW_CODE>0</GW_CODE>

<EVENT_TIME>07.24.2022 11:40:08</EVENT_TIME>

<MAC>xkKKg6p9QRSgqZoiFL6Fv51gwsgcRYVUkOssBkPMiX0=</MAC>

<RESULT_CODE>0</RESULT_CODE>

<SHVA_STATUS></SHVA_STATUS>

<DEBIT_STATUS></DEBIT_STATUS>

<APP_VERSION>3_3_5_0001</APP_VERSION>

<ASHRAIT_VERSION>4.16.0</ASHRAIT_VERSION>

<DEBIT_VERSION>0.0</DEBIT_VERSION>

<IS_LANE_OPEN>0</IS_LANE_OPEN>

<IS_SESSION_OPEN>0</IS_SESSION_OPEN>

<SHVA_TERM_ID>0</SHVA_TERM_ID>

<TERM_SERIAL_NUMBER>284-557-607</TERM_SERIAL_NUMBER>

<WEAVER_ID></WEAVER_ID>

<ParamDownloadIndication>1</ParamDownloadIndication>
<EMV_CONFIG>0</EMV_CONFIG>
<WORKING_MODE>2</WORKING_MODE>
<POS_TEXT></POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>

<RESPONSE>
<FUNCTION_GROUP>ADMIN</FUNCTION_GROUP>
<COMMAND>STATUS</COMMAND>
<SESSION_ID>22</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
<GW_CODE>0</GW_CODE>
<EVENT_TIME>07.24.2022 11:40:08</EVENT_TIME>
<MAC>7a/5xkR9rJGn0KRglwAHTCm45c1uxJZUEvTZ1VV8Zpc=</MAC>
<RESULT_CODE>0</RESULT_CODE>
<SHVA_STATUS>1</SHVA_STATUS>
<DEBIT_STATUS></DEBIT_STATUS>
<APP_VERSION>3_3_5_0001</APP_VERSION>
<ASHRAIT_VERSION>4.16.0</ASHRAIT_VERSION>
<DEBIT_VERSION>0.0</DEBIT_VERSION>
<IS_LANE_OPEN>0</IS_LANE_OPEN>
<IS_SESSION_OPEN>0</IS_SESSION_OPEN>
<SHVA_TERM_ID>0883302016</SHVA_TERM_ID>
<TERM_SERIAL_NUMBER>284-557-607</TERM_SERIAL_NUMBER>
<WEAVER_ID>PDYHWTZ4UPECMXFK87L2</WEAVER_ID>
<ParamDownloadIndication>1</ParamDownloadIndication>
<EMV_CONFIG>1</EMV_CONFIG>
<WORKING_MODE>2</WORKING_MODE>
<POS_TEXT></POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>

Close Lane

This command signals the terminal to send offline transactions to GW and clear current session data

Close Lane Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	ADMIN	
2	COMMAND	R	S	-	-	CLOSE_LANE	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		

Close Lane Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	ADMIN	
COMMAND	S	CLOSE_LANE	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, DOWNLOADING, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 203	See Appendix A
APP_VERSION	C		Ascii format as XX_XX EX: "02_23"
ASHRAIT_VERSION	C		Relevant for phase II
DEBIT_VERISON	C		Relevant from phase III
GW_CODE	C		Result code received from terminal. In case terminal was not called the element won't be part of the response
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 2 – Transaction failed (203) 101- Busy	

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>ADMIN</FUNCTION_GROUP>
<COMMAND>CLOSE_LANE</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>04.10.2016 10:22:23</TRANSACTION_TIME>
<MAC>...</MAC>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>ADMIN</FUNCTION_GROUP>
<COMMAND>CLODE_LANE</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
<EVENT_TIME>04.10.2016 10:22:23</EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<POS_TEXT>    </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```

EOD

This command signals the terminal to send offline transaction to GW, get parameters update, trigger settlement (if configured) and get updates from Debit provider (phase IV)

EOD Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	ADMIN	
2	COMMAND	R	S	-	-	EOD	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	BATCH_ID	O	N	0	99999999		unique identifier for the intended settlement batch In case this field and BATCH_DATE is sent the terminal will use this field as the batch identifier (shift id)
8	BATCH_DATE	O	C	8 chars	8 chars		Unique identifier for the intended settlement batch in the format of DDMMYYYY. The terminal will convert the data sent to YYYYMMDD since GW identifier is an int. This field should not be sent when BATCH_ID has a value

EOD Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	ADMIN	
COMMAND	S	EOD	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, DOWNLOADING, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 70, 92, 203 , 205, 208, 204, 300	See Appendix A
TMS_STATUS	L	1, 2, 3	1 Heartbeat successful 2 No updates needed 3 Heartbeat failed
SHVA_STATUS	L	1, 2, 3	1 Update completed successfully 2 No updates needed 3 Update failed Relevant for phase II This is the status of the transmission to shva
DEBIT_STATUS	L	1, 2, 3	1 Update completed successfully 2 No updates needed 3 Update failed Relevant for phase III
SETTLEMENT_STATUS	L	1, 3	1 Update completed successfully 3 Update failed Relevant for phase II Checks last settlement and sees if it was successful or failed.
PARAMETER_DOWNLOAD_STAT US	C		A list of blocks where parameters failed, separated by commas (informative only)

APP_VERSION	C		Ascii format as XX_XX EX: "02_23"
ASHRAIT_VERSION	C		Relevant for phase II
DEBIT_VERISON	C		Relevant from phase III
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
GW_CODE	C		Result code received from terminal. In case terminal was not called the element won't be part of the response
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9,70) 2 – Transaction failed (203,204, 205,300) 5- Completed with Warning (92,208) 101- Busy	
SETTLEMENT_REPORT	E		A report with Issuer Name Issuer Number Debit Amount Credit Amount Original Currency Total Amount As received in Settle (Shufersal Gateway integration)
EMV_CONFIG	E		• 1 = Full EMV • 2 = MSR Only • 3 = other • 4= no shva parameters (in case the terminal do not have the parameter s)

Open Lane

This command signals the terminal to transmit SAFQ to the GW, apply updates from SHVA (configurable) and Debit (phase IV) provider at the beginning of the shift.

Open Lane Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	ADMIN	
2	COMMAND	R	S	-	-	OPEN_LANE	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		

Open Lane Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	ADMIN	
COMMAND	S	OPEN_LANE	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, DOWNLOADING, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 202, 205	See Appendix A
SHVA_STATUS	L	1, 2, 3	1 Update completed successfully 2 No updates needed 3 Update failed Relevant for phase II This checks that the parameters for the last 3 days have been transmitted to SHVA. In other words, if last transmission was more than 3 days ago, and the last update was failure, then 3. If Less than 3 days, then 2, and if the last update was successful, then 1.
DEBIT_STATUS	L	1, 2, 3	1 Update completed successfully 2 No updates needed 3 Update failed Relevant for phase III
APP_VERSION	C		Ascii format as XX_XX EX: "02_23"
ASHRAIT_VERSION	C		Relevant for phase II
DEBIT_VERSION	C		Relevant from phase III
GW_CODE	C		Result code received from terminal. In case terminal was not called the element won't be part of the response
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 2 – Transaction failed (202, 205) 101- Busy (3)	

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>ADMIN</FUNCTION_GROUP>
<COMMAND>OPEN_LANE</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>04.10.2016 10:22:23</TRANSACTION_TIME>
<MAC>...</MAC>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>ADMIN</FUNCTION_GROUP>
<COMMAND>OPEN_LANE</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
<EVENT_TIME>04.10.2016 10:22:23</EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<SHVA_STATUS>1</SHVA_STATUS>
<DEBIT_STATUS>1</DEBIT_STATUS>
<POS_TEXT>    </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```

Erase SHVA Parameters

This command allows the POS to delete all terminal's SHVA parameters and not transactions. If there are transactions, throw an error.

Erase SHVA Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	ADMIN	
2	COMMAND	R	S	-	-	ERASE_SHVA	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		

Erase SHVA Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	ADMIN	
COMMAND	S	ERASE_SHVA	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 65	See Appendix A
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9,65) 101- Busy	

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>ADMIN</FUNCTION_GROUP>
<COMMAND>ERASE_SHVA</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>04.10.2016 10:22:23</TRANSACTION_TIME>
<MAC>...</MAC>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>ADMIN</FUNCTION_GROUP>
<COMMAND>ERASE_SHVA</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
<EVENT_TIME>04.10.2016 10:22:23</EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<POS_TEXT>    </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```


Session calls

Start Transaction

Starting a new session (Basket). The session can be for a payment transaction or to display line item information.

Start Transaction Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	SESSION	
2	COMMAND	R	S	-	-	START_TRAN	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	INVOICE	O	C	1	6	Ex: TA1234	Merchant invoice number. Max 6 characters (A- Z, a-z, 0-9). Not case sensitive.
8	CASHIER_ID	O	C	1	2,147,483,647	Ex: 560	Cashier performing the transaction NOTE: Truncates to host posting length
9	SHIFT_ID	O	C	1	1	Ex: 2	Shift at the store
10	BUSINESSDATE	O	N	8	8	Ex: 20141129	YYYYMMDD format. MX Solutions Devices Only.
11	POS_IP	O	C	-	-	Ex: 192.168.1.1	For terminal initiated calls to POS. POS IP listening address
12	POS_PORT	O	N	-	-	Ex: 5604	For terminal initiated calls to POS. POS listening port
13	SHOW_SCREEN	O	B	-	-		Whether to show a UI or not. Default = True

Start Transaction Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	SESSION	
COMMAND	S	START_TRAN	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 41, 46	See Appendix A
GW_CODE	C		Result code received from terminal. In case terminal was not called the element won't be part of the response
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 3- Last session was not finished (41,46) 101- Busy	

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>SESSION</FUNCTION_GROUP>
<COMMAND>START_TRAN</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>10.04.2016 12:33:44</TRANSACTION_TIME>
>MAC>...</MAC>
<POS_IP>192.168.2.1</POS_IP>
<POS_PORT>5604</POS_PORT>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>SESSION</FUNCTION_GROUP>
<COMMAND>START_TRAN</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
< EVENT_TIME>10.04.2016 12:33:44</ EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<POS_TEXT>      </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```

Add Line Item

This command adds a line item to the payment transaction and displays line items on the device where possible

Add Line Item Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	SESSION	
2	COMMAND	R	S	-	-	ADD_LINE_ITEM	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	CURRENCY	R	L	-	-	USD, EUR, ILS	
8	RUNNING_SUB_TOTAL	O	F	1(2)	6(2)	Ex: 1.00	Running subtotal Negative amounts allowed
9	RUNNING_TAX_AMOUNT	O	F	1(2)	6(2)	Ex: 0.07	Running tax total of the transaction Negative amounts allowed
10	RUNNING_TRANS_AMOUNT	R	F	1(2)	6(2)	Ex: 1.07	Running total of the transaction (subtotal + Tax) Negative amounts allowed
11	LINE_ITEMS (contains MERCHANDISE items and/or OFFER items)						
MERCHANDISE ITEM							
11.1	TYPE	R	L	-	-	ITEM ITEM_VOID, ITEM_UPDATE	ITEM_UPDATE = change the content of existing item (based on line_item_id) ITEM = add new line ITEM_VOID = delete existing line
11.2	LINE_ITEM_ID	R	N	1	10 ¹¹ -1	Ex: 1	Line item identifier supplied by the POS. Must be unique to the payment transaction
11.3	SKU	O	C	1	50	Ex: V4C3D5R2	
11.4	UPC	O	C	1	50	Ex: 521675964352	
11.5	DESCRIPTION	R	C	1	40	Ex: Apple Pie	
11.6	SECONDERY_DESC	O	C	1	40		Additional info regarding the item
11.7	QUANTITY	R	N	1	10	Ex: 2	Number of items
11.8	UNIT_PRICE	R	F	1(2)	6(2)	Ex: 0.50	Singe item price without tax. Negative amounts allowed.
11.9	EXTENDED_PRICE	R	F	1(2)	6(2)	Ex: 1.00	Price of the entire quantity of this line item (Qty x Unit Price) Negative amounts allowed
11.10	UNIT	O	E	1	40	EX: "	If the field is missing or empty the terminal will show the string – ""
11.11	ORDER	R	N	1			The order of adding this call items to the screen (ascending). Shared with promotions
OFFER ITEMS							
11.12	TYPE	R	L	-	-	PROMOTION PROMOTION_VOID PROMOTION_UPDATE	PROMOTION_UPDATE = change the content of existing item (based on line_item_id) PROMOTION = add new line PROMOTION_VOID = delete existing line
11.13	LINE_ITEM_ID	R	N	1	10 ¹¹ -1	Ex: 1	Line item identifier supplied by the POS. Must be unique to the payment transaction
11.14	SKU	O	C	1	50	Ex: V4C3D5R2	Optional OFFER element
11.15	DESCRIPTION	R	C	1	40	Ex: 10% OFF	Text description of offer
11.16	SECONDERY_DESC	O	C	1	40		Additional info regarding the item
11.17	OFFER_AMOUNT	R	F	1(2)	6(2)	Ex: 0.10	Amount to subtract from the transaction
11.18	OFFER_LINE_ITEM	O	N	1	10	Ex: 1	Line Item ID to which this is applied
11.19	ORDER	R	N	1			The order of adding this call items to the screen (ascending). Shared with items

Add Line Item Response

Field	Type	Values	Comments
-------	------	--------	----------

FUNCTION_GROUP	S	SESSION	
COMMAND	S	ADD_LINE_ITEM	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 40, 42, 43	See Appendix A
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 2 - Transaction Failure (40,42,43) 101- Busy	

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>SESSION</FUNCTION_GROUP>
<COMMAND>ADD_LINE_ITEM</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>04.10.2016 10:22:23</TRANSACTION_TIME>
<MAC>...</MAC>
<CURRENCY>ILS</CURRENCY>
<RUNNING_SUB_TOTAL>23.5</RUNNING_SUB_TOTAL>
<RUNNING_TRANS_AMOUNT>7.42</RUNNING_TRANS_AMOUNT>
<RUNNING_TAX_AMOUNT>0.42</RUNNING_TAX_AMOUNT>
<LINE_ITEMS>
<MERCHANDISE>
<TYPE>ITEM</TYPE>
<LINE_ITEM_ID>1695155651</LINE_ITEM_ID>
<UNIT_PRICE>5.00</UNIT_PRICE>
<DESCRIPTION>#1 Combo Meal</DESCRIPTION>
<EXTENDED_PRICE>5.00</EXTENDED_PRICE>
<QUANTITY>1</QUANTITY>
<UNIT>100 </UNIT>
<ORDER>1</ORDER>
</MERCHANDISE>
<MERCHANDISE>
<TYPE>ITEM</TYPE>
<LINE_ITEM_ID>1695155652</LINE_ITEM_ID>
<UNIT_PRICE>5.00</UNIT_PRICE>
<DESCRIPTION> </DESCRIPTION>
<EXTENDED_PRICE>5.00</EXTENDED_PRICE>
<QUANTITY>1</QUANTITY>
<UNIT></UNIT>
<ORDER>2</ORDER>
</MERCHANDISE>
<OFFER>
<TYPE>PROMOTION</TYPE>
<LINE_ITEM_ID>1695155653</LINE_ITEM_ID>
<TYPE>OTHER_COUPON</TYPE>
<DESCRIPTION>EmpDisc</DESCRIPTION>
<OFFER_AMOUNT>2.00</OFFER_AMOUNT>
<OFFER_LINE_ITEM>1695155651</OFFER_LINE_ITEM>
<ORDER>3</ORDER>
</OFFER>
<OFFER>
<TYPE>PROMOTION</TYPE>
<LINE_ITEM_ID>1695155654</LINE_ITEM_ID>
<DESCRIPTION>1OffAnyPurch</DESCRIPTION>
<OFFER_AMOUNT>1.00</OFFER_AMOUNT>
<OFFER_LINE_ITEM>1695155651</OFFER_LINE_ITEM>
<ORDER>4</ORDER>
</OFFER>
</LINE_ITEMS>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>SESSION</FUNCTION_GROUP>
<COMMAND>ADD_LINE_ITEM</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
<EVENT_TIME>10.04.2016 12:33:44</EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<POS_TEXT> </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```

Replace Line Item

This command replace the displayed line items with the ones sent and refresh the screen
Replace Items Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	SESSION	
2	COMMAND	R	S	-	-	REPLACE_ITEMS	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	CURRENCY	R	L	-	-	USD, EUR, ILS	
8	RUNNING_SUB_TOTAL	O	F	1(2)	6(2)	Ex: 1.00	Running subtotal Negative amounts allowed
9	RUNNING_TAX_AMOUNT	O	F	1(2)	6(2)	Ex: 0.07	Running tax total of the transaction Negative amounts allowed
10	RUNNING_TRANS_AMOUNT	R	F	1(2)	6(2)	Ex: 1.07	Running total of the transaction (subtotal + Tax) Negative amounts allowed
11	LINE_ITEMS (contains MERCHANDISE items and/or OFFER items) – Not mandatory						
MERCHANDISE ITEM							
11.1	TYPE	R	L	-	-	ITEM ITEM_VOID	
11.2	LINE_ITEM_ID	R	N	1	10	Ex: 1	Line item identifier supplied by the POS. Must be unique to the payment transaction
11.3	SKU	O	C	1	50	Ex: V4C3D5R2	
11.4	UPC	O	C	1	50	Ex: 521675964352	
11.5	DESCRIPTION	R	C	1	40	Ex: Apple Pie	
11.6	SECONDARY_DESC	O	C	1	40		Additional info regarding the item
11.7	QUANTITY	R	N	1	10	Ex: 2	Number of items
11.8	UNIT_PRICE	R	F	1(2)	6(2)	Ex: 0.50	Singe item price without tax. Negative amounts allowed.
11.9	EXTENDED_PRICE	R	F	1(2)	6(2)	Ex: 1.00	Price of the entire quantity of this line item (Qty x Unit Price) Negative amounts allowed
11.10	UNIT	O	E	1	40	EX: "	If the field is missing or empty the terminal will show the string – ""
11.11	ORDER	R	N	1			The order of adding this call items to the screen (ascending). Shared with promotions
OFFER ITEMS							
11.12	TYPE	R	L	-	-	PROMOTION PROMOTION_VOID	Describes the type of offer being applied
11.13	LINE_ITEM_ID	R	N	1	10	Ex: 1	Line item identifier supplied by the POS. Must be unique to the payment transaction
11.14	SKU	O	C	1	50	Ex: V4C3D5R2	Optional OFFER element
11.15	DESCRIPTION	R	C	1	40	Ex: 10% OFF	Text description of offer
11.16	SECONDARY_DESC	O	C	1	40		Additional info regarding the item
11.17	OFFER_AMOUNT	R	F	1(2)	6(2)	Ex: 0.10	Amount to subtract from the transaction
11.18	OFFER_LINE_ITEM	O	N	1	10	Ex: 1	Line Item ID to which this is applied
11.19	ORDER	R	N	1			The order of adding this call items to the screen (ascending). Shared with items

Replace Items Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	SESSION	
COMMAND	S	REPLACE_ITEMS	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 40, 42, 43	See Appendix A
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 2- Transaction Failure (40,42,43) 101- Busy	

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>SESSION</FUNCTION_GROUP>
<COMMAND>REPLACE_ITEMS</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>04.10.2016 10:22:23</TRANSACTION_TIME>
<MAC>...</MAC>
<CURRENCY>ILS</CURRENCY>
<RUNNING_SUB_TOTAL>23.5</RUNNING_SUB_TOTAL>
<RUNNING_TRANS_AMOUNT>7.42</RUNNING_TRANS_AMOUNT>
<RUNNING_TAX_AMOUNT>0.42</RUNNING_TAX_AMOUNT>
<LINE_ITEMS>
<MERCHANDISE>
<TYPE>ITEM</TYPE>
<LINE_ITEM_ID>1695155651</LINE_ITEM_ID>
<UNIT_PRICE>5.00</UNIT_PRICE>
<DESCRIPTION>#1 Combo Meal</DESCRIPTION>
<EXTENDED_PRICE>5.00</EXTENDED_PRICE>
<QUANTITY>1</QUANTITY>
<UNIT>100 </UNIT>
<ORDER>1</ORDER>
</MERCHANDISE>
<MERCHANDISE>
<TYPE>ITEM</TYPE>
<LINE_ITEM_ID>1695155652</LINE_ITEM_ID>
<UNIT_PRICE>5.00</UNIT_PRICE>
<DESCRIPTION> </DESCRIPTION>
<EXTENDED_PRICE>5.00</EXTENDED_PRICE>
<QUANTITY>1</QUANTITY>
<UNIT></UNIT>
<ORDER>2</ORDER>
</MERCHANDISE>
<OFFER>
<TYPE>PROMOTION</TYPE>
<LINE_ITEM_ID>1695155653</LINE_ITEM_ID>
<TYPE>OTHER_COUPON</TYPE>
<DESCRIPTION>EmpDisc</DESCRIPTION>
<OFFER_AMOUNT>2.00</OFFER_AMOUNT>
<OFFER_LINE_ITEM>1695155651</OFFER_LINE_ITEM>
<ORDER>3</ORDER>
</OFFER>
<OFFER>
<TYPE>PROMOTION</TYPE>
<LINE_ITEM_ID>1695155654</LINE_ITEM_ID>
<DESCRIPTION>1OffAnyPurch</DESCRIPTION>
<OFFER_AMOUNT>1.00</OFFER_AMOUNT>
<OFFER_LINE_ITEM>1695155651</OFFER_LINE_ITEM>
<ORDER>4</ORDER>
</OFFER>
</LINE_ITEMS>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>SESSION</FUNCTION_GROUP>
<COMMAND>REPLACE_ITEMS</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
<EVENT_TIME>10.04.2016 12:33:44</EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<POS_TEXT> </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```

Basket Finalized

This call signals the terminal that the last item was added to the basket. If additional line will be added than a new call for Basket finalized is needed. If payment is started before finalising a basket, it will complete with warnings.

Basket Finalized Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	SESSION	
2	COMMAND	R	S	-	-	BASKET_FINALIZED	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	FINAL_AMOUNT	R	F	-999999	999999		
8	CASH_AMOUNT	C	F	-999999	999999		Relevant from Phase II Without cash amount: Timeout is ignored, cash amount is not shown, no accept/cancel buttons is being shown. With cash amount: Timeout should be entered, cash amount must be shown, accept/cancel buttons must be shown.
9	TIMEOUT	C	T	1	60		Conditional on Cash Amount being present
10	CURRENCY	R	N	1	999		ISO numeric code (376 for ILS and 840 for USD)

Basket Finalized Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	SESSION	
COMMAND	S	BASKET_FINALIZED	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 10, 40, 42	See Appendix A
CASH_APPROVED	B		The result of user approval in case that the cash approval dialog was presented (true = approved, false = declined) Relevant from Phase II
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9,10) 2 - Transaction Failure (40,42)	

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>SESSION</FUNCTION_GROUP>
<COMMAND>BASKET_FINALIZED</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>10.04.2016 12:33:44</TRANSACTION_TIME>
>MAC>...</MAC>
<FINAL_AMOUNT>456.77</FINAL_AMOUNT>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>SESSION</FUNCTION_GROUP>
<COMMAND>BASKET_FINALIZED</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
< EVENT_TIME>10.04.2016 12:33:44</ EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<POS_TEXT>      </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```

Basket Summary

This Triggers a presentation of a due balance screen
Basket Summary Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	SESSION	
2	COMMAND	R	S	-	-	BASKET_SUMMERY	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	ITEMS_COUNT	R	N	0	999999		For each item replaced, or returned, minus 1. We can never go less than 0 though.
8	TOTAL_AMOUNT	R	F	-999999	999999		
9	TOTAL_DISCOUNT	C	F	-999999	999999		
10	AMOUNT_PAID	C	F	-999999	999999		
11	BALANCE	C	F	-999999	999999		
12	CURRENCY	O	C	-	-		If not sent the value will be "

Basket Summary Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	SESSION	
COMMAND	S	BASKET_SUMMERY	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9,40	See Appendix A
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 2 - Transaction Failure (40) 101- Busy	

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>SESSION</FUNCTION_GROUP>
<COMMAND>BASKET_SUMMERY</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>10.04.2016 12:33:44</TRANSACTION_TIME>
>MAC>...</MAC>
<ITEMS_COUNT>7</ITEMS_COUNT>
<TOTAL_AMOUNT>456.77</TOTAL_AMOUNT>
<TOTAL_DISCOUNT>12</TOTAL_DISCOUNT>
<AMOUNT_PAID>0</AMOUNT_PAID>
<BALANCE>456.77</BALANCE>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>SESSION</FUNCTION_GROUP>
<COMMAND>BASKET_SUMMERY</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
< EVENT_TIME>10.04.2016 12:33:44</ EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<POS_TEXT>    </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```

Extended Promotions

PHASE 3

This call present promotions that the customer can select after the last item was added and before the basket was finalized. If the customer added items form the promotions to his basket the POS will send another add line item call with this item.

Extended Promotions Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	SESSION	
2	COMMAND	R	S	-	-	EXTENDED_PROMOTIONS	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	PROMOTIONS (ARRAY)						
	PROMOTION						
7.1	PROMOTION_ID	R	C	-	-		Unique id (in a basket) for the promotion
7.2	TITLE	R	C	-	-		
7.3	MAX_QUANTITY	R	N	1	1000		The max amount of units to purchase
7.4	IMAGE_NAME	O	C	-	-		The name of the image file that was loaded to the terminal via TMS
7.5	ITEMS (ARRAY)						
	ITEM (ITEM)						
7.5.1	ITEM_ID	R	C	-	-		Unique id (in a sub promotion array) for the promotion
7.5.2	DESCRIPTION	R	C	-	-		
7.5.3	ORIGINAL_ITEM_PRICE	C	F	0	100000		Precision up to Agora If the price is empty the original price won't be shown
7.5.4	UPDATED_ITEM_PRICE	C	F	0	100000		Precision up to Agora If the price is empty the updated price won't be shown Mandatory if original amount is presented
7.5.5	IMAGE_NAME	O	C	-	-		The name of the image file that was loaded to the terminal via TMS

Extended Promotions Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	SESSION	
COMMAND	S	EXTENDED_PROMOTIONS	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 40, 42	See Appendix A
SELECTED_PROMOTIONS (ARRAY)			
ITEM			
PROMOTION_ID	C		Will not be sent when the promotion had no sub promotion
ITEM_ID	C		
QUANTITY	N		Amount of units selected by the customer
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 2 - Transaction Failure (40,42) 101- Busy	

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>SESSION</FUNCTION_GROUP>
<COMMAND>EXTENDED_PROMOTIONS</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>10.04.2016 12:33:44</TRANSACTION_TIME>
>MAC>...</MAC>
<PROMOTIONS>
<PROMOTION>
<PROMOTION_ID>rg4356dfg</PROMOTION_ID>
<TITLE> ' ' </TITLE>
<MAX_QUANTITY>10</MAX_QUANTITY>
<ITEMS>
<ITEM>
<ITEM_ID>sdfg5t</ITEM_ID>
<DESCRIPTION>3 5008153</DESCRIPTION>
<ORIGINAL_ITEM_PRICE>132.25</ORIGINAL_ITEM_PRICE>
<UPDATED_ITEM_PRICE>130</UPDATED_ITEM_PRICE>
<IMAGE_NAME>ajax.png</IMAGE_NAME>
</ITEM>
<ITEM>
<ITEM_ID>sdfgasd5t</ITEM_ID>
<DESCRIPTION> </DESCRIPTION>
<ORIGINAL_ITEM_PRICE>132.25</ORIGINAL_ITEM_PRICE>
<UPDATED_ITEM_PRICE>130</UPDATED_ITEM_PRICE>
<IMAGE_NAME>shrafrat.png</IMAGE_NAME>
</ITEM>
</ITEMS>
</PROMOTION>
</PROMOTIONS>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>SESSION</FUNCTION_GROUP>
<COMMAND>EXTENDED_PROMOTIONS</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
<EVENT_TIME>10.04.2016 12:33:44</EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<SELECTED_PROMOTIONS>
<ITEM>
<PROMOTION_ID>sdf254rdfs</PROMOTION_ID>
<ITEM_ID>df2342fd</ITEM_ID>
<QUANTITY>44</QUANTITY>
</ITEM>
<ITEM>
<PROMOTION_ID>df2343fd</PROMOTION_ID>
<ITEM_ID>f45r34tr</ITEM_ID>
<QUANTITY>12</QUANTITY>
</ITEM>
</SELECTED_PROMOTIONS>
<POS_TEXT> </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```

Payment Completed

PHASE 3

This command signals the terminal that the full amount of the transaction was paid by various means (Credit, Cash, etc.)

Payment Completed Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	SESSION	
2	COMMAND	R	S	-	-	PAYMENT_COMPLETED	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	HOLDER_AUTH	R	L	-	-	SIGNATURE, PIN, ID, OTHER	Means by which the transaction was authorized

Payment Completed Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	SESSION	
COMMAND	S	PAYMENT_COMPLETED	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 40	See Appendix A
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 2 - Transaction Failure (40) 101- Busy	

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>SESSION</FUNCTION_GROUP>
<COMMAND>PAYMENT_COMPLETED</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>10.04.2016 12:33:44</TRANSACTION_TIME>
>MAC>...</MAC>
<HOLDER_AUTH>SIGNATURE</HOLDER_AUTH>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>SESSION</FUNCTION_GROUP>
<COMMAND>PAYMENT_COMPLETED</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
< EVENT_TIME>10.04.2016 12:33:44</ EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<POS_TEXT>    </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```


Finish Transaction

This command finishes the payment process (payment and line item transactions) and closes the session (not the socket!)

Finish Session Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	SESSION	
2	COMMAND	R	S	-	-	FINISH_TRAN	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	SHOW_SCREEN	O	B	-	-		Whether to show a UI or not. Default = True

Finish Session Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	SESSION	
COMMAND	S	FINISH_TRAN	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 40, 45, 208	See Appendix A
GW_CODE	C		Result code received from terminal. In case terminal was not called the element won't be part of the response
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 2 - Transaction Failed (208) 5- Completed with Warning (40,45, 209) 101- Busy	

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>SESSION</FUNCTION_GROUP>
<COMMAND>FINISH_TRAN</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>10.04.2016 12:33:44</TRANSACTION_TIME>
>MAC>...</MAC>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>SESSION</FUNCTION_GROUP>
<COMMAND> FINISH_TRAN</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
< EVENT_TIME>10.04.2016 12:33:44</ EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<POS_TEXT>    </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```

Payment calls

Send Batch - TBD

Load

PHASE 3

This command allow the customer to charge a credit card and increase the balance of a prepaid card in the same amount.

Load Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	PAYMENT	
2	COMMAND	R	S	-	-	LOAD	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		If the value is true the GW won't send the transaction in settlement file
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	AMOUNT	R	N	10	1000000		The amount to load in Agorot. Relevant from phase III
8	BATCH_ID	R	C				unique identifier for the intended settlement batch

Load Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	PAYMENT	
COMMAND	S	LOAD	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, READING CARD, COMPLETED,	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 10, 40, 60, 62, 100, 101	See Appendix A
CARD_TOKEN	E		Credit card token Relevant for phase II only
PREPAID_PAN	C		Card number of the prepaid card Relevant for phase II only
UPDATED_BALANCE	N		Updated prepaid card balance in Agorot. Relevant from phase III
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 2- Transaction failed (10,40,60,62,100) 100 – Could not create token (101) 101- Busy	

Example Request

Phase II:

```
<TRANSACTION>
<FUNCTION_GROUP>PAYMENT</FUNCTION_GROUP>
<COMMAND>LOAD</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>04.10.2016 10:22:23</TRANSACTION_TIME>
<MAC>...</MAC>
</TRANSACTION>
```

Phase III:

```
<TRANSACTION>
<FUNCTION_GROUP>PAYMENT</FUNCTION_GROUP>
<COMMAND>LOAD</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>04.10.2016 10:22:23</TRANSACTION_TIME>
<MAC>...</MAC>
<AMOUNT>10000</AMOUNT>
</TRANSACTION>
```

Example Response

Phase II:

```
<RESPONSE>
<FUNCTION_GROUP>ADMIN</FUNCTION_GROUP>
<COMMAND>LOAD</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
<EVENT_TIME>04.10.2016 10:22:23</EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<CARD_TOKEN>...</CARD_TOKEN>
<PREPAID_PAN>...</PINPAD_PAN>
<POS_TEXT>    </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```

Phase III:

```
<RESPONSE>
<FUNCTION_GROUP>ADMIN</FUNCTION_GROUP>
<COMMAND>LOAD</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
<EVENT_TIME>04.10.2016 10:22:23</EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<UPDATED_BALANCE>10000</UPDATED_BALANCE>
<POS_TEXT>    </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```

Debit Withdrawal

PHASE 3

This command support cash withdrawal directly from the customers bank account
Debit Withdrawal Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	PAYMENT	
2	COMMAND	R	S	-	-	CASH_WITHDRAWAL	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	CASH_AMOUNT	R	N	1	10 ²³ -1		In Agorot
8	FEE_AMOUNT	R	N	1	9999		In Agorot
9	UID	R	N	1	999999		Transaction identifier
10	TIMEOUT	R	N	1	2,147,483,647	EX:20	Timeout in seconds before the device returns a read failure
11	BATCH_ID	R	C				unique identifier for the intended settlement batch

Debit Withdrawal Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	PAYMENT	
COMMAND	S	CASH_WITHDRAWAL	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, READING_CARD, WAITING_FOR_PIN, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 10, 20, 40	See Appendix A
MASKED_CARD	C		19 digits
REFERENCE	C		Processor reference for the transaction
BATCH_ID	C		
TRAN_TIMESTAMP	C		DD/MM/YYYY hh:mm
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 8- Didn't get card data (10,20) 2 - Transaction Failed (40) 101- Busy	

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>PAYMENT</FUNCTION_GROUP>
<COMMAND>CASH_WITHDRAWAL</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>10.04.2016 12:33:44</TRANSACTION_TIME>
>MAC<...</MAC>
<CASH_AMOUNT>20000</CASH_AMOUNT>
<FEE_AMOUNT>1000</FEE_AMOUNT>
<UID>123456</UID>
<TIMEOUT>20</TIMEOUT>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>PAYMENT</FUNCTION_GROUP>
<COMMAND>CASH_WITHDRAWAL</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
< EVENT_TIME>10.04.2016 12:33:44</ EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<MASKED_CARD>000458012*****1234</MASKED_CARD>
<REFERENCE>122232</REFERENCE>
<BATCH_ID>33</BATCH_ID>
<TIME_STAMP>12/03/216 22:33</TIME_STAMP>
<POS_TEXT>      </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```

Token Query

This command directs the device to generate card token information for a given card for the purpose of customer identification, validate a return or business card enrolment.

A token will be created only if the card is a valid credit card

Token Query Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	PAYMENT	
2	COMMAND	R	S	-	-	TOKEN_QUERY	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	MANUAL_ENTRY	R	B	-	-	0,1	Instructs the device to collect account information through the keypad or Swipe
8	RESTRICT_TOKEN	R	L	-	-		An enum 0 - Don't tokenize 1 - Tokenize all credit Cards 2 - Tokenize only Shufersal Credit Cards
9	TIMEOUT	R	N	1	2,147,483,647	EX:20	Timeout in seconds before the device returns a read failure

Token Query Data Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	PAYMENT	
COMMAND	S	TOKEN_QUERY	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, READING_CARD, COMPLETED	Downloading is for parameters urgent update
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 10, 20, 100, 101, 207	See Appendix A
MAIN_CLUB	N		See Appendix B
CARD_TOKEN	E		PAN tokenized. The terminal will not create a token in the following cases: 1. Card is not supported by SHVA OR 2. Card do not meet the restrict token criteria provided by the POS in the request OR 3. Card's Pan prefix is in the list provided by TMS in the relevant parameter
MASKED_CARD	C		6/4
GW_CODE	C		Result code received from terminal. In case terminal was not called the element won't be part of the response
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 8- Didn't get card data (10,20) 2 - Transaction Failure (100,101, 207) 101- Busy	

Pay Electricity Bill

Pay Phone Bill

Authorize

This command requests a payment authorization at the processor. The terminal beeps when the transaction is finished, until the card is removed, or until timeout is reached.

Revision History

Version	Date	Updated by	Revision
	12.12.2021	Alexey Balykin	• Add Addendum3Settle in Request and Response • Add Addendum4Settle in Request and Response • Add Track2 data in response if POS_PCI flag is true • Add Field55 in response if POS_PCI flag is true • Add Routing_code in request
	15.06.2022	Alexey Balykin	New field in Response - Loyalty Code
	20/06/2022	Alexey Balykin	New MAX value for BATCH_ID filed
	08/03/2023	Alexey Balykin	Moving Z-Data filed in response into Transaction Details section

Authorize Request

#	Field	Rule	Type	Min	Max	Values	Comments
	FUNCTION_GROUP	R	S	-	-	PAYMENT	
	COMMAND	R	S	-	-	AUTHORIZE	
	SESSION_ID	R	C	-	-		
	TRAINING_MODE	R	B	-	-		
	TRANSACTION_TIME	R	C	-	-		
	MAC	R	E	-	-		
	TRANSACTION_DETAILS						
	UID	C	C	-	-		UID of original transaction. Relevant for cancelation transactions and auth completions
	TRANS_ID	O	C				The trans_id of the original transaction in case of void transaction. In case both UID and trans_id were provided the terminal should ignore UID and use the trans_id. If the field is provided with MTI other than Void it should be ignored.
	OPERATION	R	L	-	-	3,4,5,6	The "J" operation 3 = inquire balance (chargeable card) 4 = execute transaction (J4)\Capture 5= authorization only (J5) 6 = execute transaction and force online (J6)
	AUTH_NUM	O	C	-	-		Authorization number received offline (referral or for completion)
	TRAN_TYPE	R	L	-	-	01, 02, 03, 06, 07, 11, 30, 53, 55	01 charge 02 unloading 03 forced transaction 06 Cashback 07 Cash (Not Supported) 11 Standing order (Not Supported) 30 Balance check 53 Refund 55 loading
	BATCH_ID	O	N	0	999999999		unique identifier for the intended settlement batch In case this field and BATCH_DATE is sent the terminal will use this field as the batch identifier (shift id)
	BATCH_DATE	O	C	8 chars	8 chars		Unique identifier for the intended settlement batch in the format of DDMMYYYY. The terminal will convert the data sent to YYYYMMDD since GW identifier is an int. This field should not be sent when BATCH_ID has a value
	MTI	R	L	-	-	100, 400	This field indicates whether it is a cancel tran. 100 – Regular Transaction 400 – Cancel Transaction (MTI values do not match MTI values in Ashrait code)

TRANSACTION_AMOUNT	R	N	0	10 ¹³ -1		In Agorot. With leading zeros. Do not include the cash and tip amounts. 0 is used only in case of cash transaction and cashback transactions (some acquires still don't support cash transaction. So the ask to send cash transactions like cashback with transaction_amount=0) in APG mode
CASH_AMOUNT	C	N	1	10 ¹³ -1		In Agorot. With leading zeros. Only when tran type is cash back.
CONVERTED_AMOUNT	C	N	1	10 ¹³ -1		In Agorot. With leading zeros. Amount converted from foreign currency to NIS according to Conversion rate field.
TIP	O	N	1	10 ¹³ -1		In Agorot. With leading zeros.
COMMISSION	O	N	1	10 ¹² - 1		Merchant Commission. Relevant for recurring payments only
PAYMENTS_NUMBER	C	N	1	999		01 – 999. Used for Credit and installments
FIRST_PAYMENT_AMOUNT	C	N	1	10 ¹³ -1		In Agorot. With leading zeros.
NEXT_PAYMENT_AMOUNT	C	N	1	10 ¹³ -1		In Agorot. With leading zeros.
IPAY_CODE	O	L	-	-	00, 01, 02, 03, 99	Special payment type for recharge transaction 00 currency 01 Stars 02 Points 03 Moadon 99 no code Other two digit number as SHVA agrees with acquirer
IPAY_NUMBER	O	N	1	10 ⁸ - 1		The number of units in the promotion
IPAY_AMOUNT	O	N	1	10 ¹³ -1		Discount amount
IPAY_PRODUCT_CODE	O	N	1	99		Product code in discount
IPAY_DISC_PERCENT	O	N	1	100		Discount percent without decimal point
ORIGINAL_CURRENCY	M	N	1	999		ISO numeric code (376 for ILS and 840 for USD)
OFFER_CODE	O	N	1	99		Promotion code
DUE_DATE	O	N	1	999999		Fixed debit date in format: yymmdd In practice, the maximum allowable without an error is 991231
CONVERTED_CURRENCY	C	N	1	999		ISO currency code to which converted – updated in case of currency conversion only.
CONVERSION_RATE	C	N	1	10 ⁹ -1		Transaction sum / converted sum (From currency other than ILS and USD)
CONVERSION_PROVIDER	O	C	-	-		Up to 25 chars
CREDIT_TERMS	M	L	-	-	1, 2, 3, 6, 8	1 regular 2 isacredit/adif/ + 30 3 immediate 6 credit 8 Installments
INDEX_PAYMENTS	C	L	-	-	1, 2	1 Hatsmada to Madad 2 Hatsmada to Dollar
DEFER_MONTHES	C	N	0	12		00 – default 1-12 – Num of months to defer
REFUND_REASON	C	L	-	-	1, 2, 3	1 Account transfer 2 Finance transaction 3 Special refund
CUSTOMER_ID	C	N	0	1 ¹⁰ -1		Considered in case it is needed
AVS_CITY	C	C	-	-		AVS – City. Up to 20 chars
AVS_STREET	C	C	-	-		AVS - Street Address and num Up to 20 chars
AVSZipCode	C	N	0	1 ¹⁰ -1		AVS – Zip code Up to 9 digits
CELL_PHONE_NUMBER	C	N	0	1 ¹¹ -1		For transactions with cellular phone number.
CELL_PASSWORD	C	C	-	-		For transactions with cellular phone number.
Addendum1	O	c				Free text

	Addendum1Settl	O	c				Extra data
	Addendum2	O	c				Free text
	Addendum2Settle	O	c				Extra data
	Addendum3Settle	O	c				Extra data
	Addendum4Settle	O	c				Extra data
	ORIG_TRANS_ID	E	E				The trans_id of the original transaction. Relevant for Void and Pre Auth completion in an integrated solution
	ORIG_TRANS_DATE	E	D				Format DDMMYYYY. Will be used to locate original transaction in Void and Pre Auth completion
	ORIG_RRN	C	C				The RRN of the original transaction. Relevant for Pre Auth completion in an integrated solution
	ORIG_AMOUNT	C	N	1	10 ¹³ -1		The amount of the original transaction. Relevant for Pre Auth completion in an integrated solution
	RESTRICT_TOKEN	R	L	-	-		An enum 0 - Don't tokenise 1 - Tokenise all Cards 2 - Tokenise only Shufersal Credit Cards
	VOICE_AUTH	O	B				Boolean, True or False. This indicates if this is a phone authorised transaction (voice authorised)
	SAPAK_MUTAV	O	N	1	10 ¹³ -1		The Sapak / Mutav Number
	SAPAK_MUTAV_IND	O	N	1	2		Indicate whether this is a Rav Sapak (1), or Rav Mutav (2)
	Z_DATA	O	N	-	99999999		SHVA / ABS - Z Data Field (field 47 sub-field A5 in Shva EMV specs) – supported from v 2.3.15
	FORCE_INCLUDE	O	B				If this field is true, the request to APG will be sent without the settlement flag no matter what the TMS configuration is. If the flag is false or not existing the terminal will use the TMS configuration to decide
	ROUTING_CODE	O	N(5)				The indication for APG which ABS terminal id should be used in the transaction

Authorize Response

Field	Type	Values	Comments			
FUNCTION_GROUP	S	PAYMENT				
COMMAND	S	AUTHORIZE				
SESSION_ID	C					
TRAINING_MODE	B					
EVENT	L	STARTED, WAITING FOR PIN, AUTHORIZING, COMPLETED, DOWNLOADING	Downloading is for parameters urgent update			
EVENT_TIME	C					
MAC	E					
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 10, 14, 15, 62, 44, 40, 66, 63, 65, 68, 206	See Appendix A			
CARD_TOKEN	E		The token created by Shufersal (Phase II) or Verifone (Phase III) if the request did not include a token Returned only if token was not present in the authorize request			
TERMINAL_ID	N		Gateway terminal id used to contact the server. In case this terminal talk directly to SHVA it will contain the SHVA terminal id (identical SHVA_TERMINAL_ID)			
TRANSACTION_DETAILS						
SHVA_TERMINAL_ID	N		The Actual terminal ID that GW sent to SHVA			
UID	C		23 chars			

PROCESSOR_ERROROR	N		Error code of ashraitEMV (according to SHVA's errors list)			
MASKED_PAN	C	EX: 000458061*****5555	19 chars leading zeros			
FULL_PAN	C	EX: 0004580610000005555	19 chars leading zeros. A parameter will control this as on/off, as it's not PCI compliant, but for this phase, it is required.			
CARD_EXPIRY	N	EX: 1216	MMYY format			
BRAND	L	00 – 11	00 PL 01 MASTER 02 VISA 03 DINERS 04 AMEX 05 ISRACARD 06 JCB 07 Discover 08 MAESTRO 09-11 RFU			
ISSUER	L	00 - 12	00 Tourist 01 isracard 02 cal 06 leumi card 03-05 RFU 07-12 RFU			
AQUIRER	L	00 - 12	00 Tourist 01 isracard 02 cal 06 leumi card 03-05 RFU 07-12 RFU			
SPECIAL_CARD_TYPE	L		00 default 01 immediate 70 club 03 fuel 04 dual74 dual club 73 dual club 76 club rechargeable 06 Rechargeable 08 dalkan 99 Tourist			
ENTRY_MODE	L	00, 04, 05, 06, 07, 10, 11, 12, 13, 40, 50, 51, 52, 80, 81	00 magnetic 04 Contactless magnetic 05 Contactless EMV 06 magnetic Mobile-CTL 07 EMV Mobile-CTL 10 Cellular Phone Num 11 RFU 12 RFU 13 RFU 40 EMV Contact 50 Phone tran 51 Signature only tran 52 Internet tran 80 Fallback (chip-error) -> Magnetic 81 Empty candidate list -> Magnetic			
CREDIT_TERMS	L	1, 2, 3, 6, 8	1 regular 2 isracredit/adif/ + 30 3 immediate 6 credit 8 Installments			
TRANSACTION_AMOUNT	N		Total amount authorized			
CASH_AMOUNT	N		Cash amount authorized			
CONVERTED_AMOUNT	N		Converted amount authorized			
CONVERSION_PROVIDER	C					
CONVERTED_CURRENCY	N					
CONVERTED_RATE	N					

ACQUIRER_AUTH_TYPE	L	0-7	0 No auth 1 acquire auth 2 acquire refusal 3 shva STIP auth 4 shva STIP refusal 5 by phone auth 6 by phone refusal 7 acquire pre-auth			
ACQUIRER_AUTH_NUM	C					
ISSUER_AUTH_TYPE	L	0-8	0 No auth 1 Issuer auth 2 Issuer refusal 3 shva STIP auth 4 shva STIP refusal 5 by phone auth 6 by phone refusal 7 offline auth by smart card 8 auth by smart card – com impossible			
ISSUER_AUTH_NUM	C					
CARD_NAME	E		Up to 16 chars			
TRAN_TIME_STAMP	C		DDMMYYYYHHMMSS			
ACQUIRER_ID	N		Comp-retail-num <u>param</u> () Leading zeros			
ID_CHECK_RESP	L	0-3	1. Not entered 2. Valid 3. Not valid Not checked			
CVV_CHECK_RESP	L	0-3	0 -Not entered 1 - Valid 2- Not valid 3- Not checked			
AVS_CHECK_RES	L	0-3	1. Not entered 2. Valid 3. Not valid 4. Not checked			
PRINT_RECEIPT	L		Whether printing receipt is needed: 0 – print merchant and client receipt 1 – print merchant receipt 2- print client receipt 3 – Don't print receipt 4- Don't print for EMV CTLS and Chip 5- Don't print 6- Always print (including EMV informative transactions) This is a calculated field based on SHVA receipt parameter +min-receipt-sum parameter + Contactless-Min-receipt-Sum parameter			
PRINT_BALANCE	B		Whether to print BALANCE on the receipt			
BALANCE	C					
PRINT_ADDENDUM	B		Whether to print ADDENDUM1			
Addendum1	E					
Addendum1Settl	E					
Addendum2	E					
Addendum2Settle	E					
Addendum3Settle	E					
Addendum4Settle	E					

Field55	E		Emv-tags in field 55 from PinPad POS_PCI flag is true																																											
Track2	C		POS_PCI flag is true																																											
VERIFIED_METHOD	C		String to print on receipt based on card verification method. Verified by PIN/ Verified By Device																																											
TELTOABILITY	C		Additional data from terminal regarding transaction details																																											
ASH_ERROR_CODES	C		Extended error code from terminal																																											
TERMINAL_NAME	E		For receipt																																											
APP_VERSION	C		For receipt																																											
ASHRAIT_VERSION	C		For receipt																																											
FileNo	N		For the receipt (part of STAN) 2 Characters																																											
TermNo	N		For the receipt (part of STAN) 3 Characters																																											
TermSeq	N		For the receipt (part of STAN) 3 Characters																																											
RRN	C		For receipt																																											
ATC	C		For receipt																																											
PAN_SEQ	C		For receipt																																											
TSI	C		For receipt																																											
ARC	C		For receipt																																											
TVR	C		For receipt																																											
AID	C		For receipt																																											
RECEIPT_ARR	C		An array of the elements that should be printed on the receipt. Every element should have 3 attributes: - ID (taken from the equivalent response fields) - Hebrew title - Value Each item is called RECEIPT_ARR_ITEM																																											
TRANS_ID	C		Server transaction Id for follow up transactions																																											
PROCESSOR_ERROR_TEXT	C		<table><thead><tr><th>קוד תשובה</th><th>הודעה מוקרנת</th></tr></thead><tbody><tr><td>00</td><td>מאושר.קוד אישור</td></tr><tr><td>01</td><td>חסום. החרם כרטיס</td></tr><tr><td>02</td><td>גנוב. החרם כרטיס</td></tr><tr><td>03</td><td>התקשר לחברת האשראי</td></tr><tr><td>04</td><td>עסקה לא אושרה</td></tr><tr><td>05</td><td>כרטיס מזויף. החרם</td></tr><tr><td>06</td><td>דחה עסקה: cvv2 שגוי</td></tr><tr><td>07</td><td>דחה עסקה: cavv/ucavf שגוי</td></tr><tr><td>08</td><td>דחה עסקה: נתוני כתובת שגויים</td></tr><tr><td>09</td><td>דחה עסקה: הכרטיס אינו בתוקף</td></tr><tr><td>10</td><td>אישור חלקי</td></tr><tr><td>11</td><td>דחה עסקה:חוסר בנק/"כוכבים/מילים/הטבה אחרת</td></tr><tr><td>12</td><td>הכרטיס לא מורשה במסוף</td></tr><tr><td>13</td><td>דחייה. קוד יתרה שגוי</td></tr><tr><td>14</td><td>דחייה.כרטיס לא משויך לרשת</td></tr><tr><td>15</td><td>דחייה.נתק בתקשורת</td></tr><tr><td>16</td><td>דחייה.אין הרשאה לסוג מטבע</td></tr><tr><td>17</td><td>דחייה. אין הרשאה לסוג אשראי בעסקה</td></tr><tr><td>26</td><td>דחה עסקה: id שגוי</td></tr></tbody></table> This also includes offline declines.	קוד תשובה	הודעה מוקרנת	00	מאושר.קוד אישור	01	חסום. החרם כרטיס	02	גנוב. החרם כרטיס	03	התקשר לחברת האשראי	04	עסקה לא אושרה	05	כרטיס מזויף. החרם	06	דחה עסקה: cvv2 שגוי	07	דחה עסקה: cavv/ucavf שגוי	08	דחה עסקה: נתוני כתובת שגויים	09	דחה עסקה: הכרטיס אינו בתוקף	10	אישור חלקי	11	דחה עסקה:חוסר בנק/"כוכבים/מילים/הטבה אחרת	12	הכרטיס לא מורשה במסוף	13	דחייה. קוד יתרה שגוי	14	דחייה.כרטיס לא משויך לרשת	15	דחייה.נתק בתקשורת	16	דחייה.אין הרשאה לסוג מטבע	17	דחייה. אין הרשאה לסוג אשראי בעסקה	26	דחה עסקה: id שגוי			
קוד תשובה	הודעה מוקרנת																																													
00	מאושר.קוד אישור																																													
01	חסום. החרם כרטיס																																													
02	גנוב. החרם כרטיס																																													
03	התקשר לחברת האשראי																																													
04	עסקה לא אושרה																																													
05	כרטיס מזויף. החרם																																													
06	דחה עסקה: cvv2 שגוי																																													
07	דחה עסקה: cavv/ucavf שגוי																																													
08	דחה עסקה: נתוני כתובת שגויים																																													
09	דחה עסקה: הכרטיס אינו בתוקף																																													
10	אישור חלקי																																													
11	דחה עסקה:חוסר בנק/"כוכבים/מילים/הטבה אחרת																																													
12	הכרטיס לא מורשה במסוף																																													
13	דחייה. קוד יתרה שגוי																																													
14	דחייה.כרטיס לא משויך לרשת																																													
15	דחייה.נתק בתקשורת																																													
16	דחייה.אין הרשאה לסוג מטבע																																													
17	דחייה. אין הרשאה לסוג אשראי בעסקה																																													
26	דחה עסקה: id שגוי																																													
CREDIT_CARD_COMPANY_NUMBER	C		FOR RECEIPT																																											

TRAN_TYPE	L	01, 02, 03, 06, 07, 11, 30, 53, 55	01 charge 02 unloading (Not supported) 03 forced transaction 06 Cashback 07 Cash 11 Standing order (Not Supported) 30 Balance check (For PrePaid cards only) 53 Refund 55 loading (Not Supported in Phase II)			
MAIN_CLUB	L		See Appendix B			
DEFER_MONTHES	N		0-12			
PAYMENTS_NUMBER	N		01 – 999. Used for Credit and installments (When responding to the Kupa, increment by 1. For example, 2 3, 56)			
FIRST_PAYMENT_AMOUNT	N		In Agorot. With leading zeros.			
NEXT_PAYMENT_AMOUNT	N		In Agorot. With leading zeros.			
INDEX_PAYMENTS	L	1,2	1 Hatsmada to Madad 2 Hatsmada to Dollar			
FAILED_TO_REACH_GW	B		If the transaction failed to reach the GW, set to 1. Otherwise 0 (Informative only)			
PARAMETER_DOWNLOAD_STATUS	C		A list of blocks where parameters failed, separated by commas (informative only)			
SIGNATURE_REQUIRED	B		Whether or not to ask the cardholder to sign based on transaction and card data			
LOYALTY_CODE	N(6)		Field 114 (A3: Moadon Number)			
Z_DATA	O	Must be equal to the filed in response (Echo)				
END_TRANSACTION_DETAILS						
GW_CODE	C		Result code received from terminal. In case terminal was not called the element won't be part of the response			
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix			
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 4 – Can't process payment (62,63, 65, 66,68,206) 2 - Transaction failed (40,44) 14 - Transaction Declined (14, 10) 15 - Transaction Failed at Gateway (15) 100 – Could not create token (101) 101- Busy				

Example Request

```

<TRANSACTION>
<FUNCTION_GROUP>PAYMENT</FUNCTION_GROUP>
<COMMAND>AUTHORIZE</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>10.04.2016 12:33:44</TRANSACTION_TIME>
>MAC<...</MAC>
<CARD_TOKEN>...</CARD_TOKEN>
<CARD_EXPIRY>1219</CARD_EXPIRY>
<TRANSACTION_DETAILS>
<UID>234245345GDFGD</UID>
<OPERATION>4</OPERATION>
<TRAN_TYPE>01</TRAN_TYPE>
<BUSINESS_DATE>121218</BUSINESS_DATE>

```

<MTI>100</MTI>
<ENTRY_MODE>04</ENTRY_MODE>
<TRANSACTION_AMOUNT>12300</TRANSACTION_AMOUNT>
<CASH_AMOUNT>2500</CASH_AMOUNT>
<ORIGINAL_CURRENCY>376</ORIGINAL_CURRENCY>
<CREDIT_TERMS>1</CREDIT_TERMS>
</TRANSACTION_DETAILS>
</TRANSACTION>
Example Response
<RESPONSE>
<FUNCTION_GROUP>PAYMENT</FUNCTION_GROUP>
<COMMAND>AUTHORIZE</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
<EVENT_TIME>10.04.2016 12:33:44</EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<CARD_TOKEN>165dfsdf644531s2df</CARD_TOKEN>
<MERCHANT_ID>300012</MERCHANT_ID>
<SHVA_TERMINAL_ID>1234567</SHVA_TERMINAL_ID>
<TERMINAL_ID>123456789</TERMINAL_ID>
<TRANSACTION_DETAILS>
<UID>DF345V45CVG</UID>
<OPERATION>4</OPERATION>
<PROCESSOR_ERROR>00</PROCESSOR_ERROR>
<MASKED_PAN>000458012*****1234</MASKED_PAN>
<CARD_EXPIRY>1219</CARD_EXPIRY>
<BRAND>01</BRAND>
<ISSUER>06</ISSUER>
<ACQUIRER>06</ACQUIRER>
<SPECIAL_CARD_TYPE>00</SPECIAL_CARD_TYPE>
<ENTRY_MODE>04</ENTRY_MODE>
<CREDIT_TERMS>1</CREDIT_TERMS>
<TRANSACTION_AMOUNT>12300</TRANSACTION_AMOUNT>
<CASH_AMOUNT>2500</CASH_AMOUNT>
<CONVERTED_AMOUNT>2500</CONVERTED_AMOUNT>
<ORIGINAL_CURRENCY>376</ORIGINAL_CURRENCY>
<ACQUIRER_AUTH_TYPE>1</ACQUIRER_AUTH_TYPE>
<ACQUIRER_AUTH_NUM>1234567</ACQUIRER_AUTH_NUM>
<ISSUER_AUTH_TYPE>1</ISSUER_AUTH_TYPE>
<ISSUER_AUTH_NUM>1234567</ISSUER_AUTH_NUM>
<CARD_NAME> </CARD_NAME>
<TRAN_TIME_STAMP>241216115959<TRAN_TIME_STAMP>
<ACQUIRER_ID>958012</ACQUIRER_ID>
<ID_CHECK_RESP>0</ID_CHECK_RESP>
<CVV_CHECK_RESP>0</CVV_CHECK_RESP>
<AVS_CHECK_RESP>0</AVS_CHECK_RESP>
<TERMINAL_NAME> </TERMINAL_NAME>
<APP_VERSION>125</APP_VERSION>
<STAN>1346578912354</STAN>
<RRN>123456789</RRN>
<ATC>324dwf25rasdf</ATC>
<PAN_SEQ>1</PAN_SEQ>
<TSI>234wef4235trwf234ef3453rf35t</TSI>
<ARC>sv345erftg356t3q4rf21342r4f</ARC>
<TVR>sdf23421342134234242343424</TVR>
<AID>07</AID>
<PROCESSOR_ERROR_TEXT>. </PROCESSOR_ERROR_TEXT>
</TRANSACTION_DETAILS>
<POS_TEXT> </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>

Discover

This command directs the device to read the card data (Chip, Magnetic strip or Manual) in the beginning of payment transaction (equivalent to J2)

Revision History

15.06.2022	Alexey Balykin	New filed in Response - Loyalty Code
11.07.2022	Alexey Balykin	Add Voice_Auth indication
01.03.2023	Alexey Balykin	SERVICE_TYPE for gov tender in request
01.03.2023	Alexey Balykin	TERMINAL_ID for gov tender in response

Discover Request

#	Field	Rule	Type	Min	Max	Values	Comments	
	FUNCTION_GROUP	R	S	-	-	PAYMENT		
	COMMAND	R	S	-	-	DISCOVERY		
	SESSION_ID	R	C	-	-			
	TRAINING_MODE	R	B	-	-			
	TRANSACTION_TIME	R	C	-	-			
	MAC	R	E	-	-			
	TIMEOUT	M	N	1	999		seconds	
	TRANSACTION_DETAILS							
	RESTRICT_TOKEN	R	L	-	-		An enum 0 - Don't tokenize 1 - Tokenize all credit Cards 2 - Tokenize only Shufersal Credit Cards	
	MANUAL	R	B	-	-		Accept card by EMV\Swipe (if value is false) or By typing (if value is true)	
	MANUAL_REASON	C	L	-	-	SIG CNP	Indication whether this is a CNP transaction or a fallback when all reader are invalid. Mandatory when MANUAL = true	
	DISPLAY_OPERATION	O	N	-	-	5	The "J" operation to be displayed on the screen. 5= authorization only (J5) This is an optional field that is used if there is a J5 transaction that is being used, or a balance enquiry, so that the relevant screen can be seen on the terminal.	
	CTLS	R	B	-	-		Whether to enable to contactless readers. If manual = true this field will be ignored and contactless will be disabled	
	ALLOW_CANCEL	R	B	-	-		Whether the user can cancel the transaction	
	CARD_TOKEN	C	E	-	-		If supplied, the terminal will not ask the customer to enter/swipe/type card details but will use the token to create the response	
	EXPIRY	C	C	-	-		The expiry corresponding to the token provided. Not relevant from phase III	
	UNATTENDED	R	B	-	-		Whether this is Unattended POS. Will affect the authorization to ABS	
	TRANSACTION_AMOUNT	R	N	0	10 ¹³ -1		In Agorot. With leading zeros. Do not include the cash and tip amounts.	
	ORIGINAL_CURRENCY	R	N	1	999		ISO numeric code (376 for ILS and 840 for USD)	
	CASH_AMOUNT	C	N	0	10 ¹³ - 1			
	CONVERTED_AMOUNT	C	N	0	10 ¹³ - 1			
	CONVERTED_CURRENCY	C	N	1	999		ISO currency code to which converted – updated in case of currency conversion only.	
	CONVERSION_RATE	C	N	1	10 ⁹ -1		Transaction sum / converted sum (From currency other than ILS and USD)	
	TIP	O	N	1	10 ¹³ -1		In Agorot. With leading zeros.	

	UID	O	C				The UID of the original transaction in case of void transaction, or J5 completion.	
	TRANS_ID	O	C				The trans_id of the original transaction in case of void transaction. In case both UID and trans_id were provided the terminal should ignore UID and use the trans_id. If the field is provided with MTI other than Void it should be ignored.	
	AUTH_CODE	O	C				In case of PreAuth completion or voice authorized transaction	
	TRAN_TYPE	R	L	-	-	01, 02, 03, 06, 07, 11, 30, 53, 55	01 charge 02 unloading 03 forced transaction 06 Cashback 07 Cash (Not Supported) 11 Standing order (Not Supported) 30 Balance check 53 Refund 55 loading	
	MTI	R	L	-	-	100, 400, 420	This field indicates whether it is a cancel tran. 100 – Regular Transaction 400 – Cancel Transaction 420 - Cancel Authorisation request (MTI values do not match MTI values in Ashrait code)	
	SPECIAL_CUSTOM R_IND	O	B	-	-		Will affect the returned terms according to the configuration	
	HASHED_PAN	O	E	-	-		If this value is sent in the request the terminal will validate that the value is identical HASHED_PAN generated to the presented card. If the values are different the result code will be 48. The following will cause the terminal not to validate the hash pan: 1. If the terminal is new, or a new version was installed between 4 to 6 2. The terminal was rebooted between steps 4 to 6 3. The device handled a command that reset the Ashrait like parameter download, EOD 4. Another Authorize or a "one hit transaction" was already done between 4 to 6 5. Card was presented in a different entry type	
	VOICE_AUTH	O	B				Boolean, True or False. This indicates if this is a phone authorised transaction (voice authorised)	
	SERVICE_TYPE	O	N				Service type is the logic terminal that is used in current transaction. This field is mapped to ABS Terminal ID in database	

Discover Response

Field	Type	Values	Comments				
FUNCTION_GROUP	S	PAYMENT					
COMMAND	S	DISCOVERY					
SESSION_ID	C						
TRAINING_MODE	B						
EVENT	L	STARTED, CARD_INSERTED, READING_CARD, COMPLETED	CARD_INSERTED is only for contact transactions.				
EVENT_TIME	C						
MAC	E						
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 10,14, 20, 23 40, 44, 47, 48, 62 101, 211	See Appendix A				
TRANSACTION_DETAILS							
GC_TRACK	C		GC_TRACK should hold the full track2 of the presented card (CT, CTLS or MSR, manual) in the following conditions : 1. The track2 is not in a credit card format or 2. The track2 is a credit card and the brand is not in the following list: a. Visa b. MasterCard c. Amex d. Diners e. JCB f. Discover g. Maestro				

FULL_PAN	N		FULL_PAN should hold the full PAN of the presented card (CT, CTLS or MSR) in the following conditions : 1. POS_PCI flag is true or 2. The track2/typed pan is not of a credit card supported by SHVA or is a credit card and the brand is not in the following list: a. Visa b. MasterCard c. Amex d. Diners e. JCB f. Discover g. Maestro				
MASKED_PAN	C	EX: 458061*****5555	Pan in its original size with no leading zeros				
CARD_EXPIRY	N	EX: 1216	MMYY format				
MAIN_CLUB	L		See Appendix B				
BRAND	L	00 – 11	00 PL 01 MASTER 02 VISA 03 DINERS 04 AMEX 05 ISRACARD 06 JCB 07 Discover 08 MAESTRO 09-11 RFU				
ISSUER	L	00 - 12	00 Tourist 01 isracard 02 cal 06 leumi card 03-05 RFU 07-12 RFU				
AQUIRER	L	00 - 12	00 Tourist 01 isracard 02 cal 06 leumi card 03-05 RFU 07-12 RFU				
SPECIAL_CARD_TYPE	L		00 default 01 immediate 70 club 03 fuel 04 dual74 dual club 73 dual club 76 club rechargeable 06 Rechargeable 08 dalkan 99 Tourist				
ENTRY_MODE	L	00, 04, 05, 06, 07, 10, 11, 12, 13, 40, 50, 51, 52, 80, 81	00 magnetic 04 magnetic EMV 05 Contactless EMV 06 magnetic Mobile-CTL 07 EMV Mobile-CTL 10 Cellular Phone Num 11 RFU 12 RFU 13 RFU 40 EMV Contact 50 Phone tran 51 Signature only tran 52 Internet tran 80 Fallback (chip-error) -> Magnetic 81 Empty candidate list -> Magnetic				
TERMS_REGULAR	B		Can the card accept regular transactions				
TERMS_SPECIAL	B		Can the card accept isracredit/adif/ + 30 transactions				
TERMS_IMMEDIATE	B		Can the card accept immediate transactions				
TERMS_CREDIT	B		Can the card accept credit transactions				
TERMS_INSTALLMENTS	B		Can the card accept Installments transactions				
TERMS_DEFER	B		Can the card accept deferred payments				
MAX_PAYMENTS	N		Max payment allowed for the card based in installment transactions on SHVA parameters				
MIN_PAYMENTS	N		Min payment allowed for the card in installment transactions based on SHVA parameters				
CREDIT_MAX_PAYMENTS	N		Max payment allowed for the card based in Credit transactions on SHVA parameters				
CREDIT_MIN_PAYMENTS	N		Min payment allowed for the card in Credit transactions based on SHVA parameters				

CREDIT_MIN_AMOUNT	N		Minimal amount for Credit transaction in agorot				
CARD_TOKEN	C		PAN tokenized. The terminal will not create a token in the following cases: 1. Card is not supported by SHVA OR 2. Card do not meet the restrict token criteria provided by the POS in the request OR 3. Card's Pan prefix is in the list provided by TMS in the relevant parameter				
ASH_ERROR_CODES	C		Extended error code from terminal				
CARD_NAME	E		-				
TRANS_ID	C		The expected transaction id assigned by GW. This may change in Authorize if the terminal lost id synchronization with GW				
FileNo	C		File number used by terminal for STAN in deposit				
HASHED_PAN	E		the field is generated during Discover processing based on the VHQ parameters above. HASH pan is - Hash algorithm (SALT + PAN PAN + SALT) Supported Hash algorithms are: SHA256 + MD5.				
PRINT_BALANCE	B						
BALANCE	N		The balance of the card. The filed will have a value in case the card presented is a prepaid card and the terminal is configured to ask for balance in Discover and the issuer sent a correct value in the Balance Inquiry response				
END_TRANSACTION_DETAILS							
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix				
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 2 - Transaction Failure (40,62, 211) 5 - Completed with warning (44, 47) 6- Success with no data (10,20, 23, 48) 14 - Transaction Declined (14) 100 – Could not create token (101) 101- Busy					
LOYALTY_CODE	N(6)		Field 114 (A3: Moadon Number)				
TERMINAL_ID	N		ABS Terminal ID that is used in current transaction. Relevant for terminals that supports multi terminals and split (Government solution)				

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>PAYMENT</FUNCTION_GROUP>
<COMMAND>DISCOVERY</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>10.04.2016 12:33:44</TRANSACTION_TIME>
>MAC<...</MAC>
<TRANSACTION_DETAILS>
<UID>234245345GDFGD</UID>
<TRAN_TYPE>01</TRAN_TYPE>
<MTI>100</MTI>
<ENTRY_MODE>04</ENTRY_MODE>
<TRANSACTION_AMOUNT>12300</TRANSACTION_AMOUNT>
<CASH_SUM>2500</CASH_SUM>
<ORIGINAL_CURRENCY>376</ORIGINAL_CURRENCY>
<TRAN_TYPE>01</TRAN_TYPE>
</TRANSACTION_DETAILS>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>PAYMENT</FUNCTION_GROUP>
<COMMAND>DISCOVERY</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
< EVENT_TIME>10.04.2016 12:33:44</ EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<TRANSACTION_DETAILS>
<UID>DF345V45CVG</UID>
<MASKED_PAN>000458012*****1234</MASKED_PAN>
<CARD_EXPIRY>1219</CARD_EXPIRY>
<MAIN_CLUB>02</MAIN_CLUB>
<BRAND>01</BRAND>
<ISSUER>06</ISSUER>
<ACQUIRER>06</ACQUIRER>
<SPECIAL_CARD_TYPE>00</SPECIAL_CARD_TYPE>
<ENTRY_MODE>04</ENTRY_MODE>
<CREDIT_TERMS>1</CREDIT_TERMS>
<TRAN_TIMESTAMP>111203085555</TRAN_TIMESTAMP>
</TRANSACTION_DETAILS>
<POS_TEXT>      </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```

Device Calls

Read Card Data

This command directs the device to read the card data (Contactless, manual or Magnetic strip), checks if this is a credit card or a loyalty card and returns token (credit card) and Masked PAN or TRACK2 (Loyalty card).

In Phase I the terminal will always read MSR data, without checking if this is a Loyalty card, and return clear track2 details.

Read Card Data Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	DEVICE	
2	COMMAND	R	S	-	-	CARD_DATA	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	TIMEOUT	R	N	1	2,147,483,647	EX:20	Timeout in seconds before the device returns a read failure
8	MANUAL	R	B	-	-		Relevant from Phase II Allow a manual entry of the PAN only
9	DISPLAY_TEXT	O	E	1	1657		Display allows for up to four lines of text before scroll bar is displayed. When four lines are exceeded, the box will include scroll bars to navigate up/down through text area

Read Card Data Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	DEVICE	
COMMAND	S	CARD_DATA	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, READING_CARD, COMPLETED, CARD_INSERTED	CARD_INSERTED is for UX300 implementation
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 10, 20	See Appendix A
MAIN_CLUB	N		Appendix B
TYPE	L	TRACK2, MASKED	The type of card id
DATA	N	EX:1234567890123456	Phase I: TRACK2 for Shufersal loyalty card Phase II: MASKED PAN in case of credit card and TRACK2\Full Pan in case of a non credit card. Non credit card definition is: 1. The track2 is not in a credit card format or 2. The track2\Pan is a credit card and the brand is not in the following list: a. Visa b. MasterCard c. Amex d. Diners e. JCB f. Discover g. Maestro POS_PCI value will allow to send credit card track2\Full Pan value Pan will be returned with no leading zeros
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix

AGGREGATED_C ODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 8 – Didn't get card data (10,20) 101- Busy	
---------------------	---	---	--

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>DEVICE</FUNCTION_GROUP>
<COMMAND>CARD_DATA</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>10.04.2016 12:33:44</TRANSACTION_TIME>
>MAC<...</MAC>
<TIMEOUT>20</TIMEOUT>
<MANUAL>1</MANUAL>
</TRANSACTION>
```

Example Response

Phase I:

```
<RESPONSE>
<FUNCTION_GROUP>DEVICE</FUNCTION_GROUP>
<COMMAND>CARD_DATA</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
< EVENT_TIME>10.04.2016 12:33:44</ EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<MAIN_CLUB>00</MAIN_CLUB>
<TYPE>TRACK2</TYPE>
<CARD_ID>12345678901234561234567890</CARD_ID>
<POS_TEXT>      </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```

Capture Loyalty

This command directs the device collect customer's loyalty data by swiping\Inserting card or typing Id number.

Capture Loyalty Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	DEVICE	
2	COMMAND	R	S	-	-	LOYALTY	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	TIMEOUT	R	N	1	2,147,483,647	EX:20	Timeout in seconds before the device returns a read failure
8	METHOD	O	L	-	-		The method of identification: 1 = ID 2= Cell Number (RFU) 3 = Card 4 = combined (card + id) Default is 4 Relevant from phase II
9	DISPLAY_TEXT	O	E	1	4000		Header text for the screen, default text is

Capture Loyalty Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	DEVICE	
COMMAND	S	LOYALTY	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, READING_CARD, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 10, 20, 21, 40, 101	See Appendix A
MAIN_CLUB	L		Appendix B
TYPE	L	TRACK2, TOKEN, ID, CELL, MASKED	The type of card id

DATA	Changes based on type	EX:1234567890123456	Phase I: TRACK2, ID or CELL for Shufersal loyalty card Phase II: SHUFERSAL Credit Card If we have a token, return the token. If no token, or token call fails, then show Masked PAN 6/4 NON Credit Card For non credit cards return full track 2 Other Credit Card Masked PAN If a cell phone number or ID was entered, display those here. Non credit card definition is: 1. The track2 is not in a credit card format or 2. The track2 is a credit card and the brand is not in the following list: a. Visa b. MasterCard c. Amex d. Diners e. JCB f. Discover g. Maestro POS_PCI value will allow to send credit card track2 value The terminal will not create a token in the following cases: 1. Card is not supported by SHVA OR 2. Card's PAN prefix is in the list provided by TMS in the relevant parameter
GW_CODE	C		Result code received from terminal. In case terminal was not called the element won't be part of the response
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 100 – Could not create token (101) 8 – Didn't get card data (10,20, 21) 101- Busy	

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>DEVICE</FUNCTION_GROUP>
<COMMAND>CARD_DATA</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>10.04.2016 12:33:44</TRANSACTION_TIME>
>MAC<...</MAC>
<TIMEOUT>20</TIMEOUT>
</TRANSACTION>
```

Example Response

Phase I:

```
<RESPONSE>
<FUNCTION_GROUP>DEVICE</FUNCTION_GROUP>
<COMMAND>CARD_DATA</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
< EVENT_TIME>10.04.2016 12:33:44</ EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<MAIN_CLUB>02</MAIN_CLUB>
<TYPE>TRACK2</TYPE>
<CARD_ID>12345678901234561234567890</CARD_ID>
<POS_TEXT>      </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```

Signature Capture

This command directs the device to capture signature from a customer

Signature Capture Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	DEVICE	
2	COMMAND	R	S	-	-	SIGNATURE	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	DISPLAY_TEXT	O	E	1	4000		Display allows for up to four lines of text before scroll bar is displayed. When four lines are exceeded, the box will include scroll bars to navigate up/down through text area
8	TIMEOUT	R	N	1	2,147,483,647	EX:20	Timeout in seconds before the device returns a read failure
9	TRANS_ID	O	S	1	17		Gateway transaction ID

Signature Capture Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	DEVICE	
COMMAND	S	SIGNATURE	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 10	See Appendix A
SIGNATURE	E		Signature image as a PNG
TRANS_ID	S		Mirror of request if present.
GW_CODE	C		Result code received from terminal. In case terminal was not called the element won't be part of the response
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 9 – Didn't get signature (10) 101- Busy	

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>DEVICE</FUNCTION_GROUP>
<COMMAND>SIGNATURE</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>10.04.2016 12:33:44</TRANSACTION_TIME>
>MAC>...</MAC>
<DISPLAY_TEXT>PFA+15DXoNeQINeX16rXldedlNei15wg15LXkdeZINeU157XodeaPC9QPg==</DISPLAY_TEXT>
<TIMEOUT>20</TIMEOUT>
>MAC>...</MAC>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>DEVICE</FUNCTION_GROUP>
<COMMAND>SIGNATURE</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
< EVENT_TIME>10.04.2016 12:33:44</ EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<SIGNATURE>...</SIGNATURE>
<POS_TEXT>    </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```

PAN Capture

This command directs the terminal to capture a credit card number for collecting loyalty data. The typing should be operated by the cashier

Pan Capture Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	DEVICE	
2	COMMAND	R	S	-	-	PAN	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	TIMEOUT	R	N	1	2,147,483,647	EX:20	Timeout in seconds before the device returns a read failure
8	REQUIRE_CVV	O	B	-	-		Whether to ask for CVV. Default value is False Relevant from Phase II

Pan Capture Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	DEVICE	
COMMAND	S	PAN	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 10, 20	See Appendix A
PAN	N		PAN as typed if this is not credit card or POS_PCI is enabled. If POS_PCI flag is disabled and this is a credit card the PAN will be returned masked Credit card definition is: 1. The card brand is in the following list: a. Visa b. MasterCard c. Amex d. Diners e. JCB f. Discover g. Maestro
EXPIRY	N		Cards Expiry as typed
CVV	N		CVV as typed
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 8 – Didn't get card data (10,20) 101- Busy	

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>DEVICE</FUNCTION_GROUP>
<COMMAND>PAN</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>10.04.2016 12:33:44</TRANSACTION_TIME>
>MAC>...</MAC>
<TIMEOUT>20</TIMEOUT>
>MAC>...</MAC>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>DEVICE</FUNCTION_GROUP>
<COMMAND>PAN</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
< EVENT_TIME>10.04.2016 12:33:44</ EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<PAN>1234567890123456</PAN>
<EXPIRY>1222</EXPIRY>
<POS_TEXT>      </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```

Customer Id Capture

This command directs the terminal to capture the customer Identification (Personal ID or Phone) using digits only

Customer Id Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	DEVICE	
2	COMMAND	R	S	-	-	CUSTOMER_ID	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	DISPLAY_TEXT	O	E	1	4000		Display allows for up to four lines of text before scroll bar is displayed. When four lines are exceeded, the box will include scroll bars to navigate up/down through text area
8	TIMEOUT	R	N	1	2,147,483,647	EX:20	Timeout in seconds before the device returns a read failure

Customer Id Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	DEVICE	
COMMAND	S	CUSTOMER_ID	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 10, 21	See Appendix A
CUSTOMER_ID	N	Between 1 and 15 digits	Customer ID
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 10 – Didn't get ID (10,21) 101- Busy	

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>DEVICE</FUNCTION_GROUP>
<COMMAND>CUSTOMER_ID</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>10.04.2016 12:33:44</TRANSACTION_TIME>
>MAC>...</MAC>
<DISPLAY_TEXT>PFA+15DXoNeQINeX16rXIdedINei15wg15LXkdeZINeU157XodeaPC9QPg==</DISPLAY_TEXT>
<TIMEOUT>20</TIMEOUT>
>MAC>...</MAC>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>DEVICE</FUNCTION_GROUP>
<COMMAND>CUSTOMER_ID</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
<EVENT_TIME>10.04.2016 12:33:44</EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<CUSTOMER_ID>043d75689</CUSTOMER_ID>
<POS_TEXT>    </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```

Cell Transactions Password Capture

PHASE 3

This command directs the terminal to capture passwords for cell phone transactions

Cell Transactions Password Capture Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	DEVICE	
2	COMMAND	R	S	-	-	PASSWORD	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	DISPLAY_TEXT	O	E	1	4000		Display allows for up to four lines of text before scroll bar is displayed. When four lines are exceeded, the box will include scroll bars to navigate up/down through text area
8	TIMEOUT	R	N	1	2,147,483,647	EX:20	Timeout in seconds before the device returns a read failure

Cell Transactions Password Capture Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	DEVICE	
COMMAND	S	PASSWORD	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 10	See Appendix A
PASSWORD	C		Password
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 11 – Didn't get password (10) 101- Busy	

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>DEVICE</FUNCTION_GROUP>
<COMMAND>PASSWORD</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>10.04.2016 12:33:44</TRANSACTION_TIME>
>MAC>...</MAC>
<DISPLAY_TEXT>PFA+15DXoNeQINeX16rXldedlNei15wg15LXkdeZINeU157XodeaPC9QPg==</DISPLAY_TEXT>
<TIMEOUT>20</TIMEOUT>
>MAC>...</MAC>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>DEVICE</FUNCTION_GROUP>
<COMMAND>CUSTOMER_ID</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
< EVENT_TIME>10.04.2016 12:33:44</ EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<PASSWORD>0433d5689</PASSWORD>
<POS_TEXT>      </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```

Customer Survey

This command directs the terminal to present a survey to the customer

Customer Survey Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	DEVICE	
2	COMMAND	R	S	-	-	SURVEY	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	TIMEOUT	R	N	1	2,147,483,647	EX:20	Timeout in seconds before the device returns a read failure

Customer Survey Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	DEVICE	
COMMAND	S	SURVEY	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 10, 70	See Appendix A
ICON_SELECTED	N		The position of the selected icon from the left
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 12 – Didn't get survey answer (10,22) 2 – Transaction failed (70) 101- Busy	

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>DEVICE</FUNCTION_GROUP>
<COMMAND>SURVEY</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>10.04.2016 12:33:44</TRANSACTION_TIME>
>MAC>...</MAC>
<TIMEOUT>20</TIMEOUT>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>DEVICE</FUNCTION_GROUP>
<COMMAND>SURVEY</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
< EVENT_TIME>10.04.2016 12:33:44</ EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<ICON_SELECTED>4</ICON_SELECTED>
<POS_TEXT>    </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```

Custom Display

PHASE 2

This command allow the POS to send basic HTML for display. Due to security reasons the HTML can be assembled from HTML5 tags that do not require external resources (images, JS files, etc) and use CSS classes.

In addition there cannot be any interaction with the customer (like buttons or inputs) since the response do not include the feedback.

In case the HTML is not correct terminal will present a blank page without sending an error in the response.

Custom Display Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	DEVICE	
2	COMMAND	R	S	-	-	CUSTOM_DISPLAY	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	PAGE_HTML	R	E	-	-		The html converted to base64.

Custom Display Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	DEVICE	
COMMAND	S	CUSTOM_DISPLAY	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 8, 9	See Appendix A
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 101 - Busy	

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>DEVICE</FUNCTION_GROUP>
<COMMAND>CUSTOM_DSP</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>10.04.2016 12:33:44</TRANSACTION_TIME>
<MAC>...</MAC>
<PAGE_HTML>....</PAGE_HTML>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>DEVICE</FUNCTION_GROUP>
<COMMAND>CUSTOM_DSP</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
<EVENT_TIME>10.04.2016 12:33:44</EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<POS_TEXT>    </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```


Custom Image Display

PHASE 1 & 2

This command instructs the Terminal to display a slideshow of images until another call is received.

Custom Image Display Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	DEVICE	
2	COMMAND	R	S	-	-	CUSTOM_IMAGE_DISPLAY	
3	SESSION_ID	O	C	-	-		
4	FREQUENCY	R	T	-	-		The freq in seconds that the images , received from VHQ, will rotate

Custom Image Display Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	DEVICE	
COMMAND	S	CUSTOM_IMAGE_DISPLAY	
SESSION_ID	C		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
RESULT_CODE	N	0, 2, 3, 8, 9,40,70	See Appendix A
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	1- Critical Failure (8,9,70) 13 – No open session (40) 101– Busy - (2,3)	

Enhanced Signature Capture

This command directs the device to capture signature from a customer

27.04.2022 - In the meeting with customers (Revital and Zeev) was decided to include User Approval API into Enhanced signature capture API

Most of the fields exist in the current API. New fields should be added are marked with yellow

Today only one logo can be displayed. It has to be changed.

The logo will be updated in VHQ and downloaded to the device with constant name (Merchant_logo.png)

For each customer different logo can be displayed

Terminal will have a default HTML with approval data pre installed. ECR can send a different text in the content field which will override the default text.

The default HTML should be manageable by TMS without installing a full software bundle.

The content comes from ECR will be limited to 500 characters and will not contain any formatting to the text (\n will mean line breaking).

User will have to scroll through all the text in order to get to signature (if requested) and approval + decline buttons (if the text is longer than the what can fit in the screen) so it will signify that he read all the text.

The text on the buttons will always be approve\decline.

The command can be called outside the transaction context (start\finish transaction).

DISPLAY_TEXT_HEADER

CONTENT OR CONTENT_TEMPLATE

SIGNATURE CAPTURE BOX

☒

CHECKBOX_TEXT

LOGO

ביטול

אישור

Signature Capture Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	DEVICE	
2	COMMAND	R	S	-	-	ENHANCED_SIGNATURE	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	TIMEOUT	R	N	1	2,147,483,647	EX:20	Timeout in seconds before the device returns a read failure
8	EMAIL_ADDRESS	O	S				
9	TELEPHONE_NUMBER	O	S				
10	CUSTOMER_NAME	O	S				

11	CITY	O	S				
12	ID_NUMBER	O	S				
13	ADDITIONAL_INFO_ITEMS	O					An array of items with the details below. When more than 4 ADDITIONAL_INFO_ITEMS are added, an option to scroll is provided.
	ADDITIONAL_INFO_ITEM						
13.1	GENDER	O	S				
13.2	NAME	O	S				
13.3	DATE_OF_BIRTH	O	S				
14	CHECKBOX_TEXT	M	S				Display text for the check box
15	CHECKBOX_ACTIVE	O	B				If the check box should be activated or not. Default is 0.
	DISPLAY_TEXT_HEADER	R	E	0	40		The text that will be shown on the headline of the page Hebrew, English , Numbers ans special characters have to be supported and displayed correctly
	CONTENT_TEMPLATE	O	E	-	-		The name of pre-loaded HTML with relevant content. The file will be searched in a dedicated folder on the device
	CONTENT	O	E	0	550 characters		The text that will be shown in the middle of the screen Will be used only if CONTENT_TEMPLATE wasn't sent/ Hebrew, English , Numbers ans special characters have to be supported and displayed correctly

Signature Capture Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	DEVICE	
COMMAND	S	ENHANCED_SIGNATURE	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 10	See Appendix A
SIGNATURE	E		Signature image as a PNG
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 9 – Didn't get signature (10) 101- Busy	
CHECK_BOX_RESULT	B		Whether the box was checked or not to opt in for the offer

Approve Signature

This command directs the device to approve the signature from a customer who has signed for goods.

It will be used in case where the ECR wants to show the signature to the cashier for approval (otherwise ECR will use signature capture with trans_id)

The suggested flow for this command is -

1. do an authorization
2. call signature capture without sending trans_id
3. get the signature from the terminal and show it to the cashier
4. If the cashier approves the signature send approve signature with trans_id of the authorization
5. Terminal will send the last captured signature with the sent trans_id

Approve Signature Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	DEVICE	
2	COMMAND	R	S	-	-	APPROVE_SIGNATURE	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	TRANS_ID	R	N	-	-	-	The trans_id of the authorization that this signature is used for

Approve Signature Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	DEVICE	
COMMAND	S	APPROVE_SIGNATURE	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9	See Appendix A
GW_CODE	C		Result code received from terminal. In case terminal was not called the element won't be part of the response
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,8,9) 2 - Transaction failure (230, 231) 101- Busy (2,3)	

User approval

Pending for commercial approval!!!!

This command allows ECR to get the user approve\decline feedback on a text content sent in the request.

Terminal will have a default HTML with approval data pre installed. ECR can send a different text in the content field which will override the default text.

The default HTML should be manageable by TMS without installing a full software bundle.

The content comes from ECR will be limited to 500 characters and will not contain any formatting to the text (\n will mean line breaking).

User will have to scroll through all the text in order to get to signature (if requested) and approval + decline buttons (if the text is longer than the what can fit in the screen) so it will signify that he read all the text.

The text on the buttons will always be approve\decline.

The command can be called outside the transaction context (start\finish transaction).

User Approval Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	DEVICE	
2	COMMAND	R	S	-	-	APPROVAL	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	DISPLAY_TEXT	R	E	0	40		The text that will be shown on the headline of the page
8	CONTENT_TEMPLATE	O	C	-	-		The name of pre loaded HTML with relevant content. The file will be searched in a dedicated folder on the device
9	CONTENT	O	E	0	550 characters		The text that will be shown in the middle of the screen Will be used only if CONTENT_TEMPLATE wasn't sent
10	REQUIRE_SIGNATURE	O	B	-	-		Whether or not to show signature box in the screen
11	MANDATE_SIGNATURE	O	B	-	-		Whether or not to enable the approve button only after the user entered a signature
12	CLIENT_NAME	O	S	-	-		Customer full name Will be shown on the right most label in the user identification header. If no value is sent the Caption and label will not be visible
13	CLIENT_ID	O	S	-	-		Customer personal identification. Will be shown on the second label from the right in the user identification header If no value is sent the Caption and label will not be visible
14	CLIENT_PHONE	O	S	-	-		Customer phone number. Will be shown on the second label from the left in the user identification header If no value is sent the Caption and label will not be visible
15	CLIENT_EMAIL	O	S	-	-		Customer email address. Will be shown on the left most label in the user identification header. If no value is sent the Caption and label will not be visible
16	CLIENT_CUSTOM_CAPTION	O	S	-	-		Caption of a custom field in the user identification header If no value is sent the Caption and label will not be visible
17	CLIENT_CUSTOM_LABEL	O	S	-	-		Label of a custom field in the user identification header If no value is sent the Caption and label will not be visible
18	BACKGROUND	O	E	-	-		hex value of the background in base64
19	TIMEOUT	R	N	1	2,147,483,647	EX:20	Timeout in seconds before the device returns a read failure

User Approval Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	DEVICE	
COMMAND	S	SIGNATURE	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 10, 220, 221,222	See Appendix A
FEEDBACK	B		True if the user clicked the approve button and false if he pressed the decline button
SIGNATURE	E		Signature image as a PNG
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
LOGO	E		The image that was used as merchant logo in the screen in base64
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 2 – Transaction failed (220, 221, 222) 9 – Didn't get approval (10) 101- Busy	

Report calls

Transaction Authorizations

This command allows the POS to get the status of all authorizations within the current transaction\session.

This includes declined and cancelled transactions in the list.

8.3.1Transaction Authorizations Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	REPORT	
2	COMMAND	R	S	-	-	TRAN_AUTH	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		

Transaction Authorizations Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	REPORT	
COMMAND	S	TRAN_AUTH	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9,15	See Appendix A
AUTHORIZATIONS			
AUTHORIZATION			
UID	C		
MASKED_PAN	C	EX: 000458061*****5555	19 chars leading zeros
OPERATION	L	3,4,5,6	The "J" operation 3 = inquire balance (chargeable card) 4 = execute transaction (J4) 5= authorization only (J5) 6 = execute transaction and force online (J6)
MTI	L	100,400	
PROCESSOR_ERROR	N		Error code of ashraitEMV (according to SHVA's errors list)
TRANSACTION_AMOUNT	N		In Agorot. With leading zeros.
ORIGINAL_CURRENCY	N		ISO numeric code (376 for ILS and 840 for USD)
CASH_AMOUNT	N		
CONVERTED_AMOUNT	N		
CONVERTED_CURRENCY	N		ISO currency code to which converted – updated in case of currency conversion only.
AUTHORISATION CLOSE TAG			
AUTHORISATIONS CLOSE TAG			
GW_CODE	C		Result code received from terminal. In case terminal was not called the element won't be part of the response
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix

AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,2,8,9) 2 – Transaction Failed (61) 15- Transaction Declined at Gateway (15) 101- Busy	
-----------------	---	--	--

Example Request

```

<TRANSACTION>
<FUNCTION_GROUP>REPORT</FUNCTION_GROUP>
<COMMAND>TRAN_AUTH</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>10.04.2016 12:33:44</TRANSACTION_TIME>
>MAC>...</MAC>
</TRANSACTION>

```

Example Response

```

<RESPONSE>
<FUNCTION_GROUP>REPORT</FUNCTION_GROUP>
<COMMAND>TRAN_AUTH</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
< EVENT_TIME>10.04.2016 12:33:44</ EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<AUTHORIZATIONS>
<AUTHORIZATION>
<UID>DF345V45CVG</UID>
<MASKED_PAN>458000*****6789</MASKED_PAN>
<OPERATION>53</OPERATION>
<PROCESSOR_ERROR>0</PROCESSOR_ERROR>
</AUTHORIZATION>
</AUTHORIZATIONS>
<POS_TEXT>    </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>

```

Last Authorization

This command allows the POS to get last payment transaction data **of the current transaction/session**
Transaction Data Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	REPORT	
2	COMMAND	R	S	-	-	LAST_AUTH	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		

Transaction Data Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	REPORT	
COMMAND	S	LAST_AUTH	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
TERMINAL_ID	N		Gateway terminal id used to contact the server. In case this terminal talk directly to SHVA it will contain the SHVA terminal id (identical SHVA_TERMINAL_ID)
TRANSACTION_DETAILS			
SHVA_TERMINAL_ID	N		The Actual terminal ID that GW sent to SHVA
CARD_TOKEN	E		The token created by Shufersal (Phase II) or Verifone (Phase III) if the request did not include a token
UID	C		23 chars
Operation	L	3,4,5,6	The "J" operation 3 = inquire balance (chargeable card) 4 = execute transaction (J4)\capture 5= authorization only (J5)\pre authorization 6 = execute transaction and force online (J6)
MTI	L	100,400,500,520	The MTI of the original transaction
PROCESSOR_ERROR	N		Error code of ashraitEMV (according to SHVA's errors list)
MASKED_PAN	C	EX: 000458061*****5555	19 chars leading zeros
FULL_PAN	C	EX: 0004580610000005555	19 chars leading zeros
CARD_EXPIRY	N	EX: 1216	MMYY format
BRAND	L	00 – 11	00 PL 01 MASTER 02 VISA 03 DINERS 04 AMEX 05 ISRACARD 06 JCB 07 Discover 08 MAESTRO 09-11 RFU
ISSUER	L	00 - 12	00 Tourist 01 isracard 02 cal 06 leumi card 03-05 RFU 07-12 RFU

AQUIRER	L	00 - 12	00 Tourist 01 isracard 02 cal 06 leumi card 03-05 RFU 07-12 RFU
SPECIAL_CARD_TYPE	L		00 default 01 immediate 70 club 03 fuel 04 dual74 dual club 73 dual club 76 club rechargeable 06 Rechargeable 08 dalkan 99 Tourist
ENTRY_MODE	L	00, 04, 05, 06, 07, 10, 11, 12, 13, 40, 50, 51, 52, 80, 81	00 magnetic 04 magnetic EMV 05 Contactless EMV 06 magnetic Mobile-CTL 07 EMV Mobile-CTL 10 Cellular Phone Num 11 RFU 12 RFU 13 RFU 40 EMV Contact 50 Phone tran 51 Signature only tran 52 Internet tran 80 Fallback (chip-error) -> Magnetic 81 Empty candidate list -> Magnetic
CREDIT_TERMS	L	1, 2, 3, 6, 8	1 regular 2 isracredit/adif/ + 30 3 immediate 6 credit 8 Installments
TRANSACTION_AMOUNT	N		Total amount authorized
CASH_AMOUNT	N		Cash amount authorized
CONVERTED_AMOUNT	N		Converted amount authorized
ACQUIRER_AUTH_TYPE	L	0-7	0 No auth 1 acquire auth 2 acquire refusal 3 shva STIP auth 4 shva STIP refusal 5 by phone auth 6 by phone refusal 7 acquire pre-auth
AQUIRER_AUTH_NUM	C		
ISSUER_AUTH_TYPE	L	0-8	0 No auth 1 Issuer auth 2 Issuer refusal 3 shva STIP auth 4 shva STIP refusal 5 by phone auth 6 by phone refusal 7 offline auth by smart card 8 auth by smart card – com impossible
ISSUER_AUTH_NUM	C		
CARD_NAME	C		Up to 16 chars
TRAN_TIME_STAMP	C		DDMMYYHHMMSS
ACQUIRER_ID	N		Comp-retail-num <u>param</u> () Leading zeros
ID_CHECK_RESP	L	0-3	1. Not entered 2. Valid 3. Not valid Not checked

CVV_CHECK_RESP	L	0-3	1. Not entered 2. Valid 3. Not valid Not checked																																								
AVS_CHECK_RES	L	0-3	1. Not entered 2. Valid 3. Not valid Not checked																																								
BALANCE	C		For Prepaid cards load/unload transactions																																								
PRINT_RECEIPT	L		Whether printing receipt is needed: 0 – print merchant and client receipt 1 – print merchant receipt 2- print client receipt 3 – Don't print receipt																																								
TERMINAL_NAME	C		For receipt																																								
APP_VERSION	C		For receipt																																								
ASHRAIT_VERSION	C		For receipt																																								
CARD_NAME	C		For receipt																																								
FileNo	N		For the receipt (part of STAN) 2 Characters																																								
TermNo	N		For the receipt (part of STAN) 3 Characters																																								
TermSeq	N		For the receipt (part of STAN) 3 Characters																																								
RRN	C		For receipt																																								
ATC	C		For receipt																																								
PAN_SEQ	C		For receipt																																								
TSI	C		For receipt																																								
ARC	C		For receipt																																								
TVR	C		For receipt																																								
AID	C		For receipt																																								
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix																																								
AGGREGATED_CODE_PAYMENT	L	0,1,4,8,100	0 – Success (0) 1- Critical Failure (1,2,8,9) 8– Can't process payment (62,68) 4 - Transaction failed (40,44) 100 – Could not create token (101)																																								
PROCESSOR_ERROR_TEXT	C		<table><tr><th>קוד תשובה</th><th>הודעה מוקרנת</th></tr><tr><td>00</td><td>מאושר.קוד אישור</td></tr><tr><td>01</td><td>חסום. החרם כרטיס</td></tr><tr><td>02</td><td>גנוב. החרם כרטיס</td></tr><tr><td>03</td><td>התקשר לחברת האשראי</td></tr><tr><td>04</td><td>עסקה לא אושרה</td></tr><tr><td>05</td><td>כרטיס מזויף. החרם</td></tr><tr><td>06</td><td>דחה עסקה: cvv2 שגוי</td></tr><tr><td>07</td><td>דחה עסקה: cavv/ucaf שגוי</td></tr><tr><td>08</td><td>דחה עסקה: נתוני כתובת שגויים</td></tr><tr><td>09</td><td>דחה עסקה: הכרטיס אינו בתוקף</td></tr><tr><td>10</td><td>אישור חלקי</td></tr><tr><td>11</td><td>דחה עסקה:חוסר בנק/כוכבים/מיילים/הטבה אחרת</td></tr><tr><td>12</td><td>הכרטיס לא מורשה במסוף</td></tr><tr><td>13</td><td>דחייה. קוד יתרה שגוי</td></tr><tr><td>14</td><td>דחייה.כרטיס לא משויך לרשת</td></tr><tr><td>15</td><td>דחייה.נתק בתקשורת</td></tr><tr><td>16</td><td>דחייה.אין הרשאה לסוג מטבע</td></tr><tr><td>17</td><td>דחייה. אין הרשאה לסוג אשראי בעסקה</td></tr><tr><td>26</td><td>דחה עסקה: id שגוי</td></tr></table>	קוד תשובה	הודעה מוקרנת	00	מאושר.קוד אישור	01	חסום. החרם כרטיס	02	גנוב. החרם כרטיס	03	התקשר לחברת האשראי	04	עסקה לא אושרה	05	כרטיס מזויף. החרם	06	דחה עסקה: cvv2 שגוי	07	דחה עסקה: cavv/ucaf שגוי	08	דחה עסקה: נתוני כתובת שגויים	09	דחה עסקה: הכרטיס אינו בתוקף	10	אישור חלקי	11	דחה עסקה:חוסר בנק/כוכבים/מיילים/הטבה אחרת	12	הכרטיס לא מורשה במסוף	13	דחייה. קוד יתרה שגוי	14	דחייה.כרטיס לא משויך לרשת	15	דחייה.נתק בתקשורת	16	דחייה.אין הרשאה לסוג מטבע	17	דחייה. אין הרשאה לסוג אשראי בעסקה	26	דחה עסקה: id שגוי
קוד תשובה	הודעה מוקרנת																																										
00	מאושר.קוד אישור																																										
01	חסום. החרם כרטיס																																										
02	גנוב. החרם כרטיס																																										
03	התקשר לחברת האשראי																																										
04	עסקה לא אושרה																																										
05	כרטיס מזויף. החרם																																										
06	דחה עסקה: cvv2 שגוי																																										
07	דחה עסקה: cavv/ucaf שגוי																																										
08	דחה עסקה: נתוני כתובת שגויים																																										
09	דחה עסקה: הכרטיס אינו בתוקף																																										
10	אישור חלקי																																										
11	דחה עסקה:חוסר בנק/כוכבים/מיילים/הטבה אחרת																																										
12	הכרטיס לא מורשה במסוף																																										
13	דחייה. קוד יתרה שגוי																																										
14	דחייה.כרטיס לא משויך לרשת																																										
15	דחייה.נתק בתקשורת																																										
16	דחייה.אין הרשאה לסוג מטבע																																										
17	דחייה. אין הרשאה לסוג אשראי בעסקה																																										
26	דחה עסקה: id שגוי																																										
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 15	See Appendix A																																								
ORIGINAL_CURRENCY	N	1-999	ISO Numeric Code (376 for ILS, 840 for USD)																																								
ASH_ERROR_CODES	C		Extended error code from terminal																																								

CONVERTED_CURRENCY	N		
CONVERTED_RATE	N		
TRANS_ID	C		Server Transaction ID
TELTOABILITY	C		Additional data from terminal regarding transaction details
VERIFIED_METHOD	C		String to print on receipt based on card verification method. Verified by PIN/ Verified By Device
CREDIT_CARD_COMPANY_NUMBER	N		FOR RECEIPT
TRAN_TYPE	L	01, 02, 03, 06, 07, 11, 30, 53, 55	01 charge 02 unloading (Not supported) 03 forced transaction 06 Cashback 07 Cash 11 Standing order (Not Supported) 30 Balance check (For PrePaid cards only) 53 <i>Refund</i> 55 loading (Not Supported in Phase II)
DEFER_MONTHS	N	0-12	
PAYMENTS_NUMBER	N		01 – 999. Used for Credit and installments
FIRST_PAYMENT_AMOUNT	N		In Agorot. With leading zeros.
NEXT_PAYMENT_AMOUNT	N		In Agorot. With leading zeros.
INDEX_PAYMENTS	L	1,2	1 Hatsmada to Madad 2 Hatsmada to Dollar
Addendum1	C		
Addendum2	C		
MAIN_CLUB	L		See Appendix B
End of TRANSACTION_DETAILS			
GW_CODE	C		Result code received from terminal. In case terminal was not called the element won't be part of the response
AGGREGATED_CODE	L	0 – Success (0) 1 - Critical Failure (1,2,8,9) 15 - Transaction Declined at Gateway 101- Busy	

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>REPORT</FUNCTION_GROUP>
<COMMAND>LAST_TRAN</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>10.04.2016 12:33:44</TRANSACTION_TIME>
>MAC>...</MAC>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>PAYMENT</FUNCTION_GROUP>
<COMMAND>LAST_AUTH</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
<EVENT_TIME>10.04.2016 12:33:44</EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<TRANSACTION_DETAILS>
<RESULT_CODE>0</RESULT_CODE>
<CARD_TOKEN>165dfsfdf644531s2df</CARD_TOKEN>
<MERCHANT_ID>300012</MERCHANT_ID>
<SHVA_TERMINAL_ID>1234567</SHVA_TERMINAL_ID>
<TERMINAL_ID>123456789</TERMINAL_ID>
<UID>DF345V45CVG</UID>
<OPERATION>4</OPERATION>
<PROCESSOR_ERROR>00</PROCESSOR_ERROR>
<MASKED_PAN>000458012*****1234</MASKED_PAN>
<CARD_EXPIRY>1219</CARD_EXPIRY>
<BRAND>01</BRAND>
<ISSUER>06</ISSUER>
<ACQUIRER>06</ACQUIRER>
<SPECIAL_CARD_TYPE>00</SPECIAL_CARD_TYPE>
<ENTRY_MODE>04</ENTRY_MODE>
<CREDIT_TERMS>1</CREDIT_TERMS>
<TRANSACTION_AMOUNT>12300</TRANSACTION_AMOUNT>
<CASH_AMOUNT>2500</CASH_AMOUNT>
<CONVERTED_AMOUNT>2500</CONVERTED_AMOUNT>
<ORIGINAL_CURRENCY>376</ORIGINAL_CURRENCY>
<ACQUIRER_AUTH_TYPE>1</ACQUIRER_AUTH_TYPE>
<ACQUIRER_AUTH_NUM>1234567</ACQUIRER_AUTH_NUM>
<ISSUER_AUTH_TYPE>1</ISSUER_AUTH_TYPE>
<ISSUER_AUTH_NUM>1234567</ISSUER_AUTH_NUM>
<CARD_NAME> </CARD_NAME>
<TRAN_TIME_STAMP>241216115959</TRAN_TIME_STAMP>
<ACQUIRER_ID>958012</ACQUIRER_ID>
<ID_CHECK_RESP>0</ID_CHECK_RESP>
<CVV_CHECK_RESP>0</CVV_CHECK_RESP>
<AVS_CHECK_RESP>0</AVS_CHECK_RESP>
<TERMINAL_NAME> </TERMINAL_NAME>
<APP_VERSION>125</APP_VERSION>
<STAN>1346578912354</STAN>
<RRN>123456789</RRN>
<ATC>324dwf25rasdf</ATC>
<PAN_SEQ>1</PAN_SEQ>
<TSI>234wef4235trwf234ef3453rf35t</TSI>
<ARC>sv345erftg356t3q4rf21342r4f</ARC>
<TVR>sdf23421342134234242343424</TVR>
<AID>07</AID>
<PROCESSOR_ERROR_TEXT> </PROCESSOR_ERROR_TEXT>
<POS_TEXT> </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</TRANSACTION_DETAILS>
<POS_TEXT> </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```

Get Transaction Details

Allows POS to retrieve the data of a transaction based on UID or TRANS_ID (APG transaction id).

If non of the identifier is sent the call will fail. If both are sent the TRANS_ID will be used

If there is no transaction in the GW that answer the query the call will succeed and the array will be empty.

Get transaction details request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	REPORT	
2	COMMAND	R	S	-	-	GET_TRAN_DETAILS	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	UID	C	C	-	-		The UID of the requested transaction
8	TRANS_ID	C	C	-	-		The id assigned to the transaction by APG

Get transaction details response

Field	Type	Values	Comments
FUNCTION_GROUP	S	REPORT	
COMMAND	S	GET_TRAN_DETAILS	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 15, 210	See Appendix A
GW_RESP	E		The result of GW trans search call
TRANSACTIONS (Array of TRAN_DETAILS)			
UID	C		23 chars
Operation	L	3,4,5,6	The "J" operation 3 = inquire balance (chargeable card) 4 = execute transaction (J4)\capture 5= authorization only (J5)\pre authorization 6 = execute transaction and force online (J6) APG Operation --> ECR Value <pre>{ "SALE", "4"}, {"PRE_AUTH", "5"}, {"COMPLETION", "4"}, {"REFUND", "4"}, {"ADD_VALUE", "4"}, {"REMOVE_VALUE", "4"}, {"BALANCE", "3"}, {"VOID", "4"}, {"IMPLICIT_REVERSE", "5"} }</pre>

MTI	L	100,400,420,500,520	The MTI of the original transaction APG Operation --> ECR Value <pre>{ "SALE", "100", "PRE_AUTH", "100", "COMPLETION", "500", "REFUND", "100", "VOID", "400", "ADD_VALUE", "100", "REMOVE_VALUE", "100", "BALANCE", "100", "IMPLICIT_REVERSE", "420" }</pre>
PROCESSOR_ERROR	N		Calculated by STATUS_CODE value from the GW. If the value is 1,2,4,5,7 - return 0 Else return 1038 If the transaction is offline approved - 0 should be returned (like today for approved transaction in APG) Else - return 1038 (like for transaction from APG)
MASKED_PAN	C	EX: 000458061*****5555	19 chars leading zeros
BRAND	L	00 – 11	00 PL 01 MASTER 02 VISA 03 DINERS 04 AMEX 05 ISRACARD 06 JCB 07 Discover 08 MAESTRO 09-11 RFU
ENTRY_MODE	L	00, 04, 05, 06, 07, 10, 11, 12, 13, 40, 50, 51, 52, 80, 81	00 magnetic 04 magnetic EMV 05 Contactless EMV 06 magnetic Mobile CTL 07 EMV Mobile CTL 10 Cellular Phone Num 11 RFU 12 RFU 13 RFU 40 EMV Contact 50 Phone tran 51 Signature only tran 52 Internet tran 80 Fallback (chip error) -> Magnetic 81 Empty candidate list -> Magnetic Not supported by APG query and do not add data for ECR recovery
CREDIT_TERMS	L	1, 2, 3, 6, 8	1 regular 2 isracredit/adif/ + 30 3 immediate 6 credit 8 Installments
TRANSACTION_AMOUNT	N		Total amount authorized
CASH_AMOUNT	N		Cash amount authorized
CONVERTED_AMOUNT	N		Converted amount authorized
ISSUER_AUTH_NUM	C		
TRAN_TIME_STAMP	C		DDMMYYHHMMSS
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 15	See Appendix A Not supported by APG query and do not add data for ECR recovery
ORIGINAL_CURRENCY	N	1-999	ISO Numeric Code (376 for ILS, 840 for USD)

CONVERTED_CURRENCY	N		
TRANS_ID	C		Server Transaction ID
TRAN_TYPE	L	01, 02, 03, 06, 07, 11, 30, 53, 55	01 charge 02 unloading (Not supported) 03 forced transaction 06 Cashback 07 Cash 11 Standing order (Not Supported) 30 Balance check (For PrePaid cards only) 53 Refund 55 loading (Not Supported in Phase II)
DEFER_MONTHS	N	0-12	
PAYMENTS_NUMBER	N		01 – 999. Used for Credit and installments
FIRST_PAYMENT_AMOUNT	N		In Agorot. With leading zeros.
NEXT_PAYMENT_AMOUNT	N		In Agorot. With leading zeros.
INDEX_PAYMENTS	L	1,2	1 Hatsmada to Madad 2 Hatsmada to Dollar
ISSUER	L	00 - 12	00 Tourist 01 isracard 02 cal 06 MAX 03-05 RFU 07-12 RFU
AQUIRER	L	00 - 12	00 Tourist 01 isracard 02 cal 05 Tranzila 06 MAX 07 Cardcom 03-04 RFU 08-12 RFU
End of TRANSACTIONS			
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
GW_CODE	C		Result code received from terminal. In case terminal was not called the element won't be part of the response
AGGREGATED_CODE	L	0 – Success (0) 1 - Critical Failure (1,2,8,9) 2- Transaction failed (210) 15 - Transaction Declined at Gateway 101- Busy	

General calls

Cancel

This command cancels the transaction that is currently in process. **The Cancel call can't follow SEND BATCH, FINISH TRANSACTION, CANCEL, EOD, PAYMENT COMPLETED and ERASE_SHVA**
Cancel Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	GENERAL	
2	COMMAND	R	S	-	-	CANCEL	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		

Cancel Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	GENERAL	
COMMAND	S	CANCEL	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 8, 9, 50, 51	See Appendix A
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0,1,9	0 – Success (0) 1- Critical Failure (1,2,8,9) 8 – Didn't get card data (50,51)

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>GENERAL</FUNCTION_GROUP>
<COMMAND>CANCEL</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>10.04.2016 12:33:44</TRANSACTION_TIME>
<MAC>...</MAC>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>GENERAL</FUNCTION_GROUP>
<COMMAND>CANCEL</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
<EVENT_TIME>10.04.2016 12:33:44</EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
<POS_TEXT>    </POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```

Reboot Device

This command allows the POS to send a reboot command to the device

Reboot Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	GENERAL	
2	COMMAND	R	S	-	-	REBOOT_DEVICE	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		

Reboot Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	GENERAL	
COMMAND	S	REBOOT_DEVICE	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0,1,2,9	See Appendix A
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0 – Success (0) 1- Critical Failure (1,9) 101 - Busy (2)	

MIFAL_PAIS

This command is used for retrieving last four digits of ID Number. It will be encrypted up to Mifal Pais convention
MIFAL_PAIS Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	GENERAL	
2	COMMAND	R	S	-	-	MIFAL_PAIS	
3	SESSION_ID	R	C	-	-		
4	TIMEOUT	R	N	-	-		
5	TRAINING_MODE	R	B	-	-		
6	TRANSACTION_TIME	R	C	-	-		
7	MAC	R	E	-	-		

MIFAL_PAIS Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	GENERAL	
COMMAND	S	MIFAL_PAIS	
SESSION_ID	C		
TIMEOUT	N		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 10	See Appendix A
POS_TEXT	C		4 last digits of ID that are encrypted up to Mifal Pais convention
AGGREGATED_CODE	L	0,1,9	0 – Success (0) 1- Critical Failure (1,2,8,9) 8 – Didn't get card data (50,51)

Example XML Command:

```
<TRANSACTION>
  <FUNCTION_GROUP>GENERAL</FUNCTION_GROUP>
  <COMMAND>MIFAL_PAIS</COMMAND>
  <SESSION_ID>40</SESSION_ID>
  <TIMEOUT>45</TIMEOUT>
  <TRAINING_MODE>1</TRAINING_MODE>
  <TRANSACTION_TIME>06.14.2022 11:56:40</TRANSACTION_TIME>
  <MAC>P+RQpZ7u+qufiKqjf/Ou4oOTs63sZLX1g1XugtldhEA=</MAC>
</TRANSACTION>
```

Example XML Response when user sends digits:

```
<RESPONSE>
  <FUNCTION_GROUP>GENERAL</FUNCTION_GROUP>
  <COMMAND>MIFAL_PAIS</COMMAND>
  <SESSION_ID>40</SESSION_ID>
```

```
<TRAINING_MODE>1</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
<LAST_4_DIGITS_ID>x+=G</LAST_4_DIGITS_ID>
<EVENT_TIME>06.14.2022 12:00:31</EVENT_TIME>
<MAC>g4pdB5U/WocMHXeZE/k2Prt+H2jofeVYPSY93n5U4gQ=</MAC>
<RESULT_CODE>0</RESULT_CODE>
<POS_TEXT></POS_TEXT>
<AGGREGATED_CODE>0</AGGREGATED_CODE>
</RESPONSE>
```

Example XML Response to TIMEOUT:

```
<RESPONSE>
<FUNCTION_GROUP>GENERAL</FUNCTION_GROUP>
<COMMAND>MIFAL_PAIS</COMMAND>
<SESSION_ID>40</SESSION_ID>
<TRAINING_MODE>1</TRAINING_MODE>
<EVENT>COMPLETED</EVENT>
<LAST_4_DIGITS_ID></LAST_4_DIGITS_ID>
<EVENT_TIME>06.14.2022 12:06:59</EVENT_TIME>
<MAC>SiSLVTEdGqeXD/o+/CRSD/MdezL+ptXFyhn8pY7LmwM=</MAC>
<RESULT_CODE>10</RESULT_CODE>
<POS_TEXT> 4 .. </POS_TEXT>
<AGGREGATED_CODE>11</AGGREGATED_CODE>
</RESPONSE>
```

SET TERMINAL LOCALE

This command is used to update UI language

1. Default language in the terminal – Hebrew
2. ~~No~~ new parameter in VHQ will be added
3. **New API will be developed. API name – SET TERMINAL LOCALE.** In this stage only update language will be supported
4. ECR will send another API call to return to default language (Hebrew). Terminal will not return to default language automatically
5. New API will work according to our current logic. ~~API couldn't be sent during payment operations for example (Discover, Authorize)~~
6. Mandatory messages will be marked in the ticket with green. Not relevant messages (like AVS) will be marked with red.
7. OK button will be displayed always in right side of the screen/
8. OK button will be in green and CANCEL button will be in red

SET TERMINAL LOCALE Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	GENERAL	
2	COMMAND	R	S	-	-	SET_TERMINAL_LOCALE	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
	LANGUAGE					EN for english HE for hebrew	

SET TERMINAL LOCALE Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	GENERAL	
COMMAND	S	CANCEL	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 10, New Error for invalid language value	See Appendix A
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0,1,9	0 – Success (0) 1- Critical Failure (1,2,8,9) 8 – Didn't get card data (50,51)

Example XML Command:

Example XML Response when user sends HE or EN:

Example XML Response to TIMEOUT or wrong value in language:

Marked with red - these messages can be ignored in this stage

5.2.1	Please initiate terminal				
	Insert/swipe/tap	//	PinPad		
	Swipe/tap	/	PinPad		
	swipe/insert	/	PinPad		
4.2	Insert card		PinPad		
	Insert card/tap	/	PinPad		
contctlss	tap		PinPad		
4.2	remove card		PinPad		
	swipe card again		PinPad		
4.2	use magnetic reader	"	PinPad		
	option not allowed for merchant	'			
EMV	please wait.do not remove card	.	PinPad		
4.2 , 5.2	card error		PinPad		
	unrecognized card		PinPad		
5.2.1	Activate session to SHVA	.		.	
5.2.1	Activate session to SHVA	.			
8.2	Invalid credit terms for card	.			
8.4	No auth for trans				
8.6	No auth for currency				
5.2	invalid card number				
5.2, 5.3	card not allowed for terminal				
5.5					
8.1	Card not allowed for transaction				
5.3	Out of range card number				
5.4, 9.2	Club code out of range				
9.2	Invalid vehicle number				
5.2.2.3	Invalid issuer code				
5.5.2.1	Card not supported.svc	.			
5.2.3	Invalid acquirer				
5.2.2.3	Invalid brand code				
5.2.	Invalid set				
5.2.4	Card expired				
5.5	Enter add-on param				
5.5, 9.2	Enter last 3 dgts	3 '		cwv2	
	On card back				
5.5	Enter last 4 dgts	4 '			
	Prntd On card				
5.5, 9.2	Enter id +check dgts	.. '		..	
5.5, 9.2	Invalid ID	..			
5.5	Invalid ID.Try again	.. .			
5.11	Please enter address	" " .		avs	

7.1	Force or go online			
10.5.8	Type F1 for authorization request	F1		
10.1	call <tel no>	(') +<' ' '>		
10.1	authorization code	. :< >.		
10.1	declined		PinPad	
	no communication	.		
5.11.2	Please enter customer's zip code			
5.11.2	Please enter customer's address			
5.5	decline:invalid cvv2/id	cvv2/.		
5.4	Decline:invalid card for chain	.		
5.4.5.7	Decline.Top-up card.	. .		
10.1.3	decline:invalid cavv/ucaf	cavv/ucaf		
5.11	Decline:invalid AVS			
10.1	card stolen-pickup			
10.1	card blocked			
10.1	counterfeit card pickup			
10.2.4	Invalid balance code	.		
10.1	Decline insufficient points/other benefits	///		
	Invalid ipay transaction data			
	Wait for auth	.	PinPad	
10.1	Approved.remove card	.	PinPad	
	Approved		PinPad	offline
10.1.2	Type credit card auth number			
1.3				
7.1	Invalid transaction data			

FORCE OFFLINE

This command is used to to change current disconnection mode between terminal and APG GW

FORCE_OFFLINE Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	GENERAL	
2	COMMAND	R	S	-	-	FORCE_OFFLINE	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		

FORCE_OFFLINE Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	GENERAL	
COMMAND	S	CANCEL	
SESSION_ID	C		
TRAINING_MODE	B		
EVENT	L	STARTED, COMPLETED	
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 10, New Error for invalid language value	See Appendix A
POS_TEXT	C		Friendly text for POS according to AGGREGATED_CODE See texts appendix
AGGREGATED_CODE	L	0,1,9	0 – Success (0) 1- Critical Failure (1,2,8,9) 8 – Didn't get card data (50,51)

Example XML Command:

Terminal Initiating Messaging Interface

General

Terminal can initiate calls to the POS as part of the commerce platform architecture.

In order for the POS to receive terminal's calls, the POS should send its IP listening address and POS listening port with the Start Transaction request. The terminal will open the socket if and when necessary acting as TCP client. No need for pairing is required since MAC key is exchanged during the register call.

Commerce Platform calls

Print

PHASE 3

This call allows the commerce app to use POS printer for dedicated content like voucher or coupons.

Print Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	CP	
2	COMMAND	R	S	-	-	PRINT	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	DATA	R	E	-	-		HTML doc

Print Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	CP	
COMMAND	S	PRINT	
SESSION_ID	R		
TRAINING_MODE	R		
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9	See Appendix A

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>CP</FUNCTION_GROUP>
<COMMAND>PRINT</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>10.04.2016 12:33:44</TRANSACTION_TIME>
>MAC>...</MAC>
<DATA>PFA+15DXoNeQINeX16rXldedINei15wg15LXkdeZINeU157XodeaPC9QPg==</DATA>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>CP</FUNCTION_GROUP>
<COMMAND>PRINT</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
< EVENT_TIME>10.04.2016 12:33:44</ EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
</RESPONSE>
```

Append Receipt

PHASE 3

Commerce Application can append HTML content to the Payment Application receipt. Content is always added at the bottom of the receipt. If called multiple times each, invocation appends content to the bottom.

Content may be appended to either the merchant or cardholder receipt.

Append Receipt Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	CP	
2	COMMAND	R	S	-	-	APPEND_RECIEPT	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	DATA	R	E	-	-		HTML doc
8	TYPE	R	L	-	-	CARDHOLDER, MERCHANT	

Append Receipt Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	CP	
COMMAND	S	APPEND_RECIEPT	
SESSION_ID	R		
TRAINING_MODE	R		
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 81	See Appendix A

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>CP</FUNCTION_GROUP>
<COMMAND>PRINT</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>10.04.2016 12:33:44</TRANSACTION_TIME>
>MAC>...</MAC>
<DATA>PFA+15DXoNeQINeX16rXIdedINei15wg15LXkdeZINeU157XodeaPC9QPg==</DATA>
<TYPE>CARDHOLDER</TYPE>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>CP</FUNCTION_GROUP>
<COMMAND>APPEND_RECIEPT</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT_TIME>10.04.2016 12:33:44</EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
</RESPONSE>
```

Send Data to POS

PHASE 3

This call allows the commerce app to send general data to the POS in order to implement functionality that not involve the payment application on the terminal.

For example, this call can be used to update the POS when a commerce app wants to add a Line item to the current transaction.

Send Data to POS Request

#	Field	Rule	Type	Min	Max	Values	Comments
1	FUNCTION_GROUP	R	S	-	-	CP	
2	COMMAND	R	S	-	-	DATA	
3	SESSION_ID	R	C	-	-		
4	TRAINING_MODE	R	B	-	-		
5	TRANSACTION_TIME	R	C	-	-		
6	MAC	R	E	-	-		
7	DATA	R	E	-	-		HTML doc

Send Data to POS Response

Field	Type	Values	Comments
FUNCTION_GROUP	S	CP	
COMMAND	S	DATA	
SESSION_ID	R		
TRAINING_MODE	R		
EVENT_TIME	C		
MAC	E		
RESULT_CODE	N	0, 1, 2, 3, 8, 9, 82	See Appendix A

Example Request

```
<TRANSACTION>
<FUNCTION_GROUP>CP</FUNCTION_GROUP>
<COMMAND>DATA</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<TRANSACTION_TIME>10.04.2016 12:33:44</TRANSACTION_TIME>
>MAC>...</MAC>
<DATA><XML><element>data</element></XML></DATA>
<TYPE>CARDHOLDER</TYPE>
</TRANSACTION>
```

Example Response

```
<RESPONSE>
<FUNCTION_GROUP>CP</FUNCTION_GROUP>
<COMMAND>DATA</COMMAND>
<SESSION_ID>0000000000000001</SESSION_ID>
<TRAINING_MODE>0</TRAINING_MODE>
<EVENT_TIME>10.04.2016 12:33:44</EVENT_TIME>
<MAC>...</MAC>
<RESULT_CODE>0</RESULT_CODE>
</RESPONSE>
```


Appendix A – Result Codes

This is an initial result code list that will be updated along the development and integration

Code	Result	Comments
0	Successful operation	The operation completed successfully
1	Invalid MAC	Terminal calculated MAC does not match request MAC
2	Still Processing	Terminal cannot process this call since a previous call was not completed yet
3	Downloading Parameters	Terminal is not available to process the transaction due to ABS parameters update
4	Could not complete operation on time	In case new internal timeout mechanism reached its limit and the Terminal haven't finished its logic processing
8	XML Error	Incoming request from POS is not valid XML
9	Unknown Error	The operation was not completed due to unknown technical error
10	CANCELED by TIMEOUT or CUSTOMER	The current COMMAND was cancelled by the customer or by a timeout value
14	Transaction Declined	Received a declined response code from SHVA / Ashrait
15	Transaction Declined at Gateway	Received an error / decline from the Gateway
20	Bad Card Read	MSR, Chip or Contactless reader on the device was not able to read / parse the card data or invalid card data
21	Invalid Personal ID	Customer typed more than 9 digits in Personal Id
22	No Survey selected	Customer pressed OK without selecting a value
23	Card is not a credit card	Presented card can't be used for credit payment since it is not recognized by SHVA
40	No open session	A finish session\Finalize Basket\Payment Completed call was made without a prior valid start session
41	The session is already open	A start session call was made when there is already an open session
42	Can't operate after payment	Can't modify basket since payment has started
43	Merchandise or offer is missing	At least one merchandise or offer is required in add line item
44	Basket was not finalized	
45	Payment was not completed	A new transaction was started without a previous finish transaction
46	Previous payment was not completed	The previous transaction included authorization and was not completed with Finish Transaction
47	Previous Discovery not paired with authorise	The previous discovery was not completed with an authorise, and a new discover was performed
48	Card presented is not identical to previous one	In case HASHED_PAN was sent in the Discover request is not identical to the one generated for the presented card
50	Can't cancel call	Cancel was call following a finish session
51	Call was already completed	Previous call was fully processed before the cancel call was received
60	Transmission to SHVA failed	Could not send batch to SHVA
62	SHVA parameters are out dated	SHVA declined the transaction since parameters are out dated
63	Last transaction was approved	Can't resubmit transaction because it was approved

64	No Card Data	Can't Authorize without Discover or Token
65	Old transaction in DB	Can't submit old transactions before updating SHVA parameters
66	Can't authorize locally	Local DB is full or reached max amount
68	Can't Authorize without card details	Can't Authorize without prior discover or card details in the request
70	Cannot find resources	Resources are missing or defect
80	Could not print	Printing failed
81	Could Not append receipt	Could Not append receipt
82	Send Data to POS failed	
90	TMS setup failed	The TMS could not identify the Store and Lane supplied by the terminal
91	Gateway setup failed	The connection / password setting at the Gateway Failed.
92	Settlement Completed with Errors	Settlement was performed successfully, however there were transactions sent to APG with errors (e.g. wrong device key that received UGP response of validation error) and they were not included in the settlement batch
93	Can't reset terminal - transactions in DB	Terminal reset can't be done because there are transactions of the previous terminal in the DB and terminal could not send them to the server
94	Reset terminal - old transactions sent to server	Terminal reset was done and offline transactions of previous terminal were sent to the server
100	Invalid card	Can't use the presented card for the requested command
101	Cannot create token	Communication to token server has failed or the token server returned an error
202	Lane is already open	Can't perform open lane if close lane wasn't called before
203	Lane is not closed	Can't perform close lane if open lane wasn't called before
204	Connection to GW timed out	Could not send the transaction/s to the GW
205	GW keys update failed	Could not renew GW session keys
206	Trans_id missing	Request for Void\PreAuth completion for integrated device without trans_id
207	Token server is not configured	Terminal is not configured for tokenization
208	Transaction from current basket was not captured	GW failed update transaction so transaction will not be included in batch
209	Transaction from old basket was not captured	GW failed update transaction so transaction will not be included in batch
210	No identifier sent	Neither TRANS_ID nor UID was sent to GET_TRAN_DETAILS
211	Transaction is duplicated	The server already has a transaction with the same trans_id and therefore it cannot be processed
220	Content is too long	In case the a text in parameter was longer than permitted
221	No content was sent	Content and CONTENT_TEMPLATE were not sent in the request
222	Could not find template	The CONTENT_TEMPLATE sent was not find on the device
230	Could not store signature	Server returned an error when trying to store signature
231	Not signature captured	Approve signature was sent but terminal has not pending signature
232	Language not supported	Language code is incorrect or the device do not have the appropriate catalog
300	EOD complete with errors	One of the sub actions of EOD has failed. Details will be give in the specific status parameters

AGGREGATED CODES

Code	Result
0	Success
1	Critical Failure
2	Transaction Failed
3	Last session was not finished
4	Can't process payment
5	Completed with warning
6	Success with no data
8	Didn't get card data
9	Didn't get signature
10	Didn't Get ID
11	Didn't get password
12	Didn't get survey answer
13	No Open Session
14	Transaction Declined
15	Transaction Declined at Gateway
100	Could not create token
101	Busy

Appendix B - Main Club definition

Field Value	Club Name	identification method
0	Unknown	If all other identifications failed
1	LifeStyle	In Discover: - Isracard (not Amex) issued card with 18th position = 9 Or in Amex list In Authorization: This logic will be implemented only in Authorization. In Discovery only for Prepaid cards the request is sent to Issuer. And LS cards are usually not prepaid cards This is new logic: If Tag B1 is not returned in response: - to continue with current logic (that is based on track2 data - Isracard (not Amex) issued card with 18th position = 9 Or in Amex list) Else: if one of the clubs in tag B1 is 18 - Then return LS indication in MainClub - else not return LS indication New logic for LifeStyle definition will be based on the response from Isracard. Isracard will return the new indication in 110 message (Response for Auth message) in Field113 (Addendum2) Tag B1. The length of the tag is dynamic (between 2 till 6 positions) Each club is defined by 2 positions. For LS the value is 18 So the card is with LS club if one of the next variations has 18 B10218 B104xx18 B10418xx B106xxyy18 B106xx18yy B10618xxyy
2	Shufersal Credit Card	Credit card with a valid PAN (16 digits) that starts with 4580 and the seventh digit is 4 OR First 6 digits are 458017 OR First 6 digits are 458054 OR First 7 digits are 4580281 OR First 8 digits are 55588880 OR First 8 digits are 55580408
3	Shufersal Loyalty Card	Mag Strip card with a standard track2 that starts with 9870

4	SuperCard	Isracard with 9 digits + first 2 digits are 11-
5	More (Isracard local)	Isracard with 9 digits + first 2 digits are 12
6	Isracard PP	Isracard with 9 digits + first 2 digits are 18, 19, 81, 83, 85, 86,39, 55 , 56 , 95, 96
7	HolmesPlace	Isracard with 9 digits + first 2 digits are 70
8	Isracard GC	Isracard with 9 digits + first 2 digits are 75, 76, 84, 51, 58
9	Ashmoret	Isracard with 9 digits + first 2 digits are 80
10	Direct	Isracard with 9 digits + first 2 digits are 71,72,48,78
11	More (International)	International Mastercard with 16 digits. Position 7-9 contains 124
12	MOI GC	PAN start with 45801909

To view the document, **download it**, as it is in Hebrew and won't render correctly in the confluence viewer





זיהוי כרטיסים - מורחב.docx

Session commands states

Command	Only in session context	Predecessor	Always complete action	Screen	Change to screen after completing	Change to screen after Cancel (POS or user)	Screen image
Ping	X			X	No	No	X
Register POS	X			KTK	KTK	Movie	Missing with Barcode
Exchange Keys	X			X	Movie	Movie	X
Status	X			X	X	X	X
Close Lane	X	open lane	V	X	Movie	Movie	X
Open Lane	X	close lane	V	X	Movie	Movie	X
Erase SHVA Parameters	X			X	Alert Success	Alert Info	 התשלום עבר בהצלחה Title  text רשיא

Start Transaction	V	Finish Transaction or open lane (only for the first start transaction)	V	Welcome	Welcome	Movie	רוכבים הבאים שוברסל
Add Line Item	V	Start session		Line item	Line item	Line item	פריטים 12.58 ₪ ▲ 12.58 ₪ גר' דת מחיר על סך 1.00 ₪ 6.00 ₪ ▼ 8.11 ₪ ▼ 48.29 ₪

							פריטים ▲ 12.58 ₪ 12.58 ₪ 6.00 ₪ 5% גר' 250 ' (בוצעה הורדת מחיר על סך 1.00 ₪) 8.11 ₪ גר' 48.29 ₪
							פריטים ▲ 12.58 ₪ 12.58 ₪ -6.00 ₪ גר' 1.00 ₪ גר' 25 8.11 ₪ גר' 48.29 ₪
							פריטים ▲ 12.58 ₪ 12.58 ₪ 6.00 ₪ גר' -1.00 ₪ גר' 25 8.11 ₪ גר' 48.29 ₪
Replace Item	V	Start session		Line item	Line item	Line item	Same as add line item

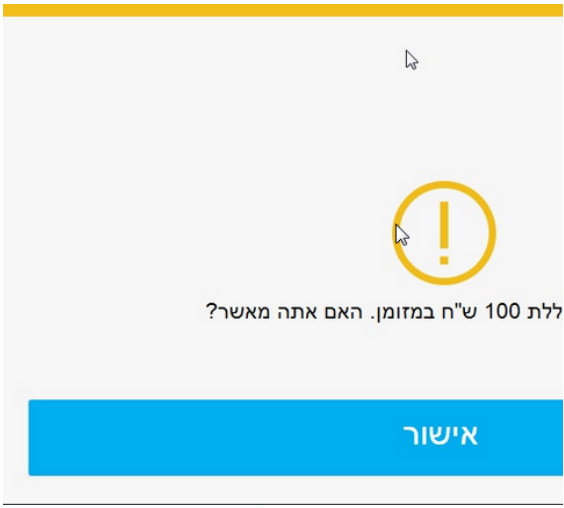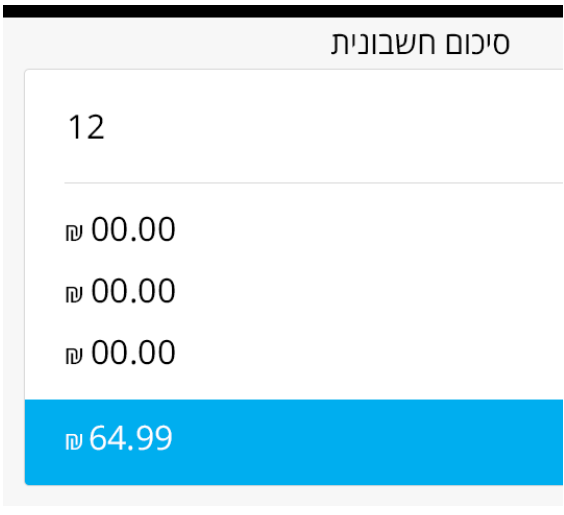Basket Finalized	V	Start session		Basket Finalized (From Phase II in case of cash)	Phase I - X Phase II - IDLE	X	
Basket Summery	V	Start session		Basket Summery	IDLE	X	
Extended Promotions	V	Start session		Extended Promotions	Extended Promotions	Extended Promotions	Not designed yet
Payment Completed	V	Start session		X	X	X	X
Finish Transaction	V	Start session	V	Thank you	Movie (when terminal is idle)	NIR	
Discover	V	Start session		Discover	IDLE	IDLE	

י"כ לחיוב: 48.29 ש"ח



הכנס, הצמד או העבר כרטיס

ביטול

בחר סוג הכרטיס

ביטול

הזן פרטי כרטיס

הכנס/י מסי כרטיס

לחץ כאן

CVV

לחץ כאן

זוף עד

ן כאן

ביטול

Authorize	V	Discover		PIN	IDLE	IDLE

✕

הכנס/י מס' תעודת הזהות

ן

ר

א

ט

ו

ח

י

ע

כ

ג

ד

ש

מ

נ

ה

ב

ס

ז

ביטול

123

רווח

.#*

✕

הכנס/י מס' תעודת הזהות

1

2

4

5

7

8

0

ביטול

קוד סודי

השתמש/י במקלדת של המכשיר



ביטול

קוד סודי

השתמשו במקלדת של המכשיר



ביטול

כתובת

מיקוד

לחץ כאן

ביטול

כתובת

עיר

לחץ כאן

כתובת

לחץ כאן

ביטול

							 הכנס/י מס' תעודת הזהות ק ר א ט ו ן ש ד ג כ ע י ח ז ס ב ה נ מ ביטול 123 רווח .#*
							 הכנס/י מס' תעודת הזהות - / * , . " ביטול 123 רווח אבג  התשלום עבר בהצלחה
							Missing Authorizing with spinner + error screen
ReAuthorize Last Transaction	V	Authorize		PIN	IDLE	IDLE	Same as authorize
Transaction Authorizations	V			X	X	X	X
Last Transaction	X			X	X	X	X

Load	V	Start Session		LOAD	IDLE	IDLE	Not designed yet
Debit Withdrawal	V	Start Session		Debit	IDLE	IDLE	Not designed yet
Token Query	X			Token Query	IDLE (in session) Movie (out of session)	IDLE (in session) Movie (out of session)	Same as read card data
Pay Electricity Bill	X			Pay Phone	IDLE	IDLE	Not designed yet
Pay Phone Bill	X			Pay Electricity	IDLE	IDLE	Not designed yet
Read Card Data	X			Read card	IDLE (in session) Movie (out of session)	IDLE (in session) Movie (out of session)	זיהוי חבר מועדון  העבר/י עכשיו ביטול
Capture Loyalty	V PHASE 2 = X	Start Session		Loyalty	IDLE	IDLE	זיהוי חבר מועדון הכנס/י מס' תעודת זהות לחץ כאן או העבר/י כרטיס מועדון ביטול
Signature Capture	X			Signature	IDLE (in session) Movie (out of session)	IDLE (in session) Movie (out of session)	חתימה  חתום כאן ולחץ על אישור אישור

PAN Capture	X			PAN capture	IDLE (in session) Movie (out of session)	IDLE (in session) Movie (out of session)	✕ הכנס/י מס' תעודת זהות 1 2 4 5 7 8 ביטול 0
Customer Id Capture	X			ID CAPTURE	IDLE (in session) Movie (out of session)	IDLE (in session) Movie (out of session)	✕ הכנס/י מס' תעודת זהות 1 2 4 5 7 8 ביטול 0
Cell Transactions Password Capture	V	Start Session		CELL	IDLE	IDLE	Not designed yet
Customer Survey	X			SURVEY	IDLE (in session) Movie (out of session)	IDLE (in session) Movie (out of session)	סקר האם את/ה מרוצה מהשירות ? 😊 😊 😐 😞
Last Transaction	X			X	X	X	
Cancel	X			X	X	X	
Print	X			X	X	X	
Append Receipt	X			X	X	X	

Send Data to POS	X			X	X	X	
EOD	X	Close Lane		X	IDLE (in session) Movie (out of session)	IDLE (in session) Movie (out of session)	
Custom Display	X			Included in POS request	X	X	
Display Slideshow	X		X	Included in POS Request	X	Start Transaction	
Capture Loyalty	V	Start Session		Accept Coupon	Payment	Payment	
Get Transaction Details	X			X	X	X	X