


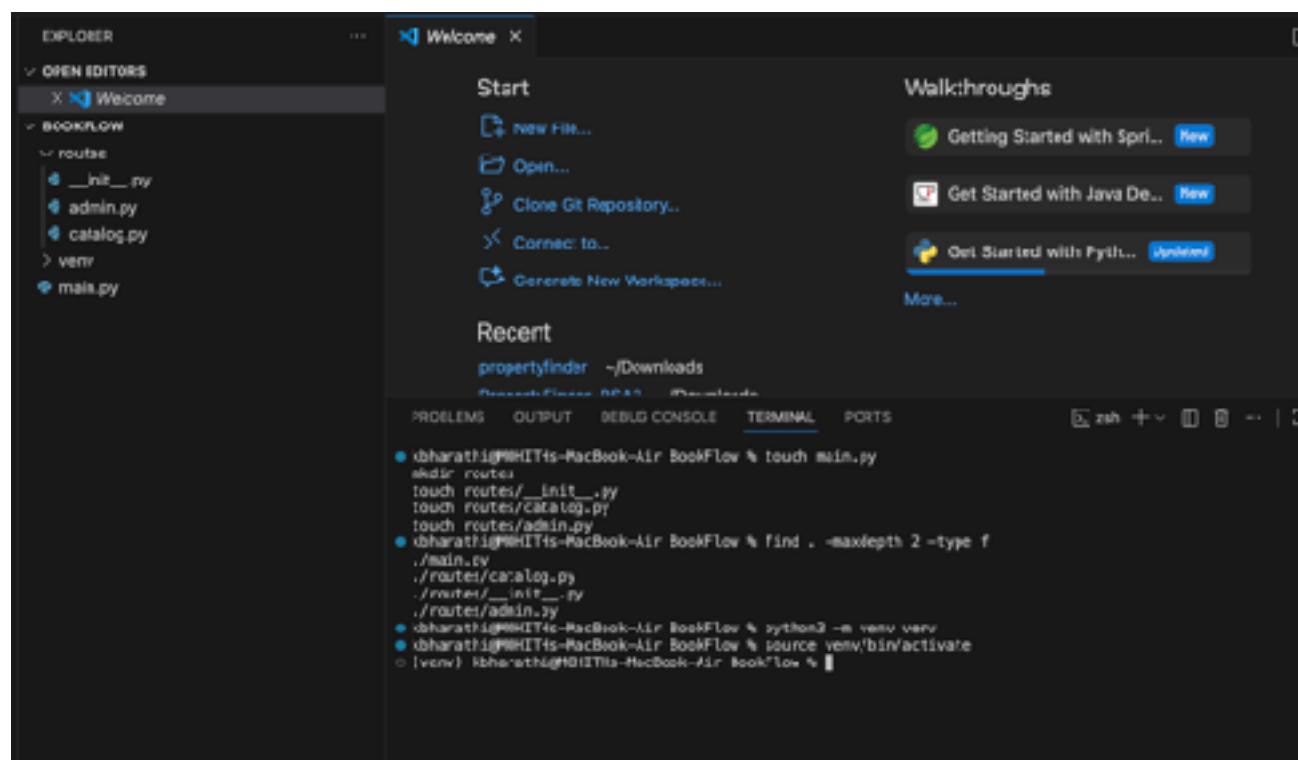

```

Required by.
(venv) kbharathi@MOHITHs-MacBook-Air BookFlow % pwd
/Users/kbharathi/BookFlow
(venv) kbharathi@MOHITHs-MacBook-Air BookFlow % find . -maxdepth 2 -type f
./venv/pyvenv.cfg
./venv/.gitignore
./main.py
./routes/catalog.py
./routes/__init__.py
./routes/admin.py
(venv) kbharathi@MOHITHs-MacBook-Air BookFlow %

```

```

kbharathi@MOHITHs-MacBook-Air BookFlow % touch main.py
mkdir routes
touch routes/__init__.py
touch routes/catalog.py
touch routes/admin.py
kbharathi@MOHITHs-MacBook-Air BookFlow % find . -maxdepth 2 -type f
./main.py
./routes/catalog.py
./routes/__init__.py
./routes/admin.py
kbharathi@MOHITHs-MacBook-Air BookFlow % python3 -m venv venv
kbharathi@MOHITHs-MacBook-Air BookFlow % source venv/bin/activate
(venv) kbharathi@MOHITHs-MacBook-Air BookFlow % pip install fastapi uvicorn
Collecting fastapi
Collecting uvicorn

```

```

• (venv) kbharathi@MOHITHs-MacBook-Air BookFlow % pip show fastapi
Name: fastapi
Version: 0.141.1
Summary: FastAPI framework, high performance, easy to learn, fast to code, ready for production
Home-page: https://github.com/fastapi/fastapi
Author:
Author-email: =?utf-8?q?Sebasti=C3=A1n_Ram=C3=ADrez?= <tiangolo@gmail.com>
License-Expression: MIT
Location: /Users/kbharathi/BookFlow/venv/lib/python3.14/site-packages
Requires: annotated-doc, pydantic, starlette, typing-extensions, typing-inspection
Required-by:
• (venv) kbharathi@MOHITHs-MacBook-Air BookFlow % pip show uvicorn
Name: uvicorn
Version: 0.54.0
Summary: The lightning-fast ASGI server.
Home-page: https://uvicorn.dev/
Author:
Author-email: Tom Christie <tom@tomchristie.com>
License-Expression: BSD-3-Clause
Location: /Users/kbharathi/BookFlow/venv/lib/python3.14/site-packages
Requires: click, h11
Required-by:

```

```

(venv) kbharathi@MOHITHs-MacBook-Air BookFlow % pwd
/Users/kbharathi/BookFlow
(venv) kbharathi@MOHITHs-MacBook-Air BookFlow % find . -maxdepth 2 -type f
./venv/pyvenv.cfg
./venv/.gitignore
./main.py
./routes/catalog.py
./routes/__init__.py
./routes/admin.py
(venv) kbharathi@MOHITHs-MacBook-Air BookFlow % source /Users/kbharathi/BookFlow/venv/bin/activate
(venv) kbharathi@MOHITHs-MacBook-Air BookFlow %

```

BookFlow Library API 0.1.0 0.1.1

default

- GET** /books Get Books
- GET** /books/{book_id} Get Book
- POST** /admin/books Add Book
- PUT** /admin/books/{book_id} Update Book
- DELETE** /admin/books/{book_id} Delete Book

Schemas

- Book** object
- HTTPValidationError** object
- ValidationError** object

default

GET /books/20180101

Parameters

HTTP headers

Execute

Response

Call

```
curl -X GET \
  "http://127.0.0.1:8080/books/20180101" \
  -H "accept: */*"
```

Request URL

http://127.0.0.1:8080/books/20180101

Server response

CODE

200

Response body

```
{
  "id": 101,
  "title": "Python Programming",
  "author": "John Smith",
  "price": 100,
  "isbn": "9781234567890",
  "status": "Available"
},
{
  "id": 102,
  "title": "Database Management",
  "author": "Michael Brown",
  "price": 200,
  "isbn": "987654321098",
  "status": "Available"
}
```

POST /books/gbook_id=101

Parameters

Item

Item	Description
book_id	101

Execute

Response

Call

```
curl -X POST \
  "http://127.0.0.1:8080/books/101" \
  -H "accept: */*"
```

Request URL

http://127.0.0.1:8080/books/101

Server response

CODE

200

Response body

```
{
  "id": 101,
  "title": "Python Programming",
  "author": "John Smith",
  "price": 100,
  "isbn": "9781234567890",
  "status": "Available"
}
```

Response Headers

```
Content-Type: application/json
Content-Length: 100
Date: Mon, 01 Jan 2018 12:00:00 GMT
Server: Apache/2.4.18
```


Swagger UI interface for the `/books/{book_id}` endpoint. The interface shows the endpoint details, parameters, and the response body for a successful GET request.

Parameters:

- book_id** (required): Integer, 100

Responses:

200 (Successful Response)

Response Body:

```
{
  "id": 100,
  "title": "The Great Gatsby",
  "author": "F. Scott Fitzgerald",
  "year": 1925,
  "available": true
}
```

Response Headers:

```
Content-Type: application/json
Content-Length: 141
Server: Apache/2.4.18 (Ubuntu)
```

Response Code: 200

Response Description: Successful Response

Response Headers:

```
Content-Type: application/json
```

Swagger UI interface for the `/books/{book_id}` endpoint. The interface shows the endpoint details, parameters, and the response body for a successful GET request.

Parameters:

- book_id** (required): Integer, 100

Responses:

200 (Successful Response)

Response Body:

```
{
  "message": "Book deleted successfully",
  "book": {
    "id": 100,
    "title": "The Great Gatsby",
    "author": "F. Scott Fitzgerald",
    "year": 1925,
    "available": true
  }
}
```

Response Headers:

```
Content-Type: application/json
```