


## SERVICES

# Delivery Details @Service methods: findAll (); findById (id); findByCourierIdAndStatusOrderByDispatch (id, status); findByCourierIdAndStatusOrderByDestination (id, status); • findByWarehouseManagerIdAndStatusOrderByDi spatch (id, status); save (details); findParcelsToPickup (); findParcelsToDeliver (); assignCourierToPickUp (address, courier); assignCourierToDeliver (address, courier); moveToNextStatus (id, status); findByDoorCode (code); findByTrackingNumber (number); finalizeDelivery (code); getRandomCellID (parcel); setCellIdDispatch (parcel); setCellIdDestination (parcel);

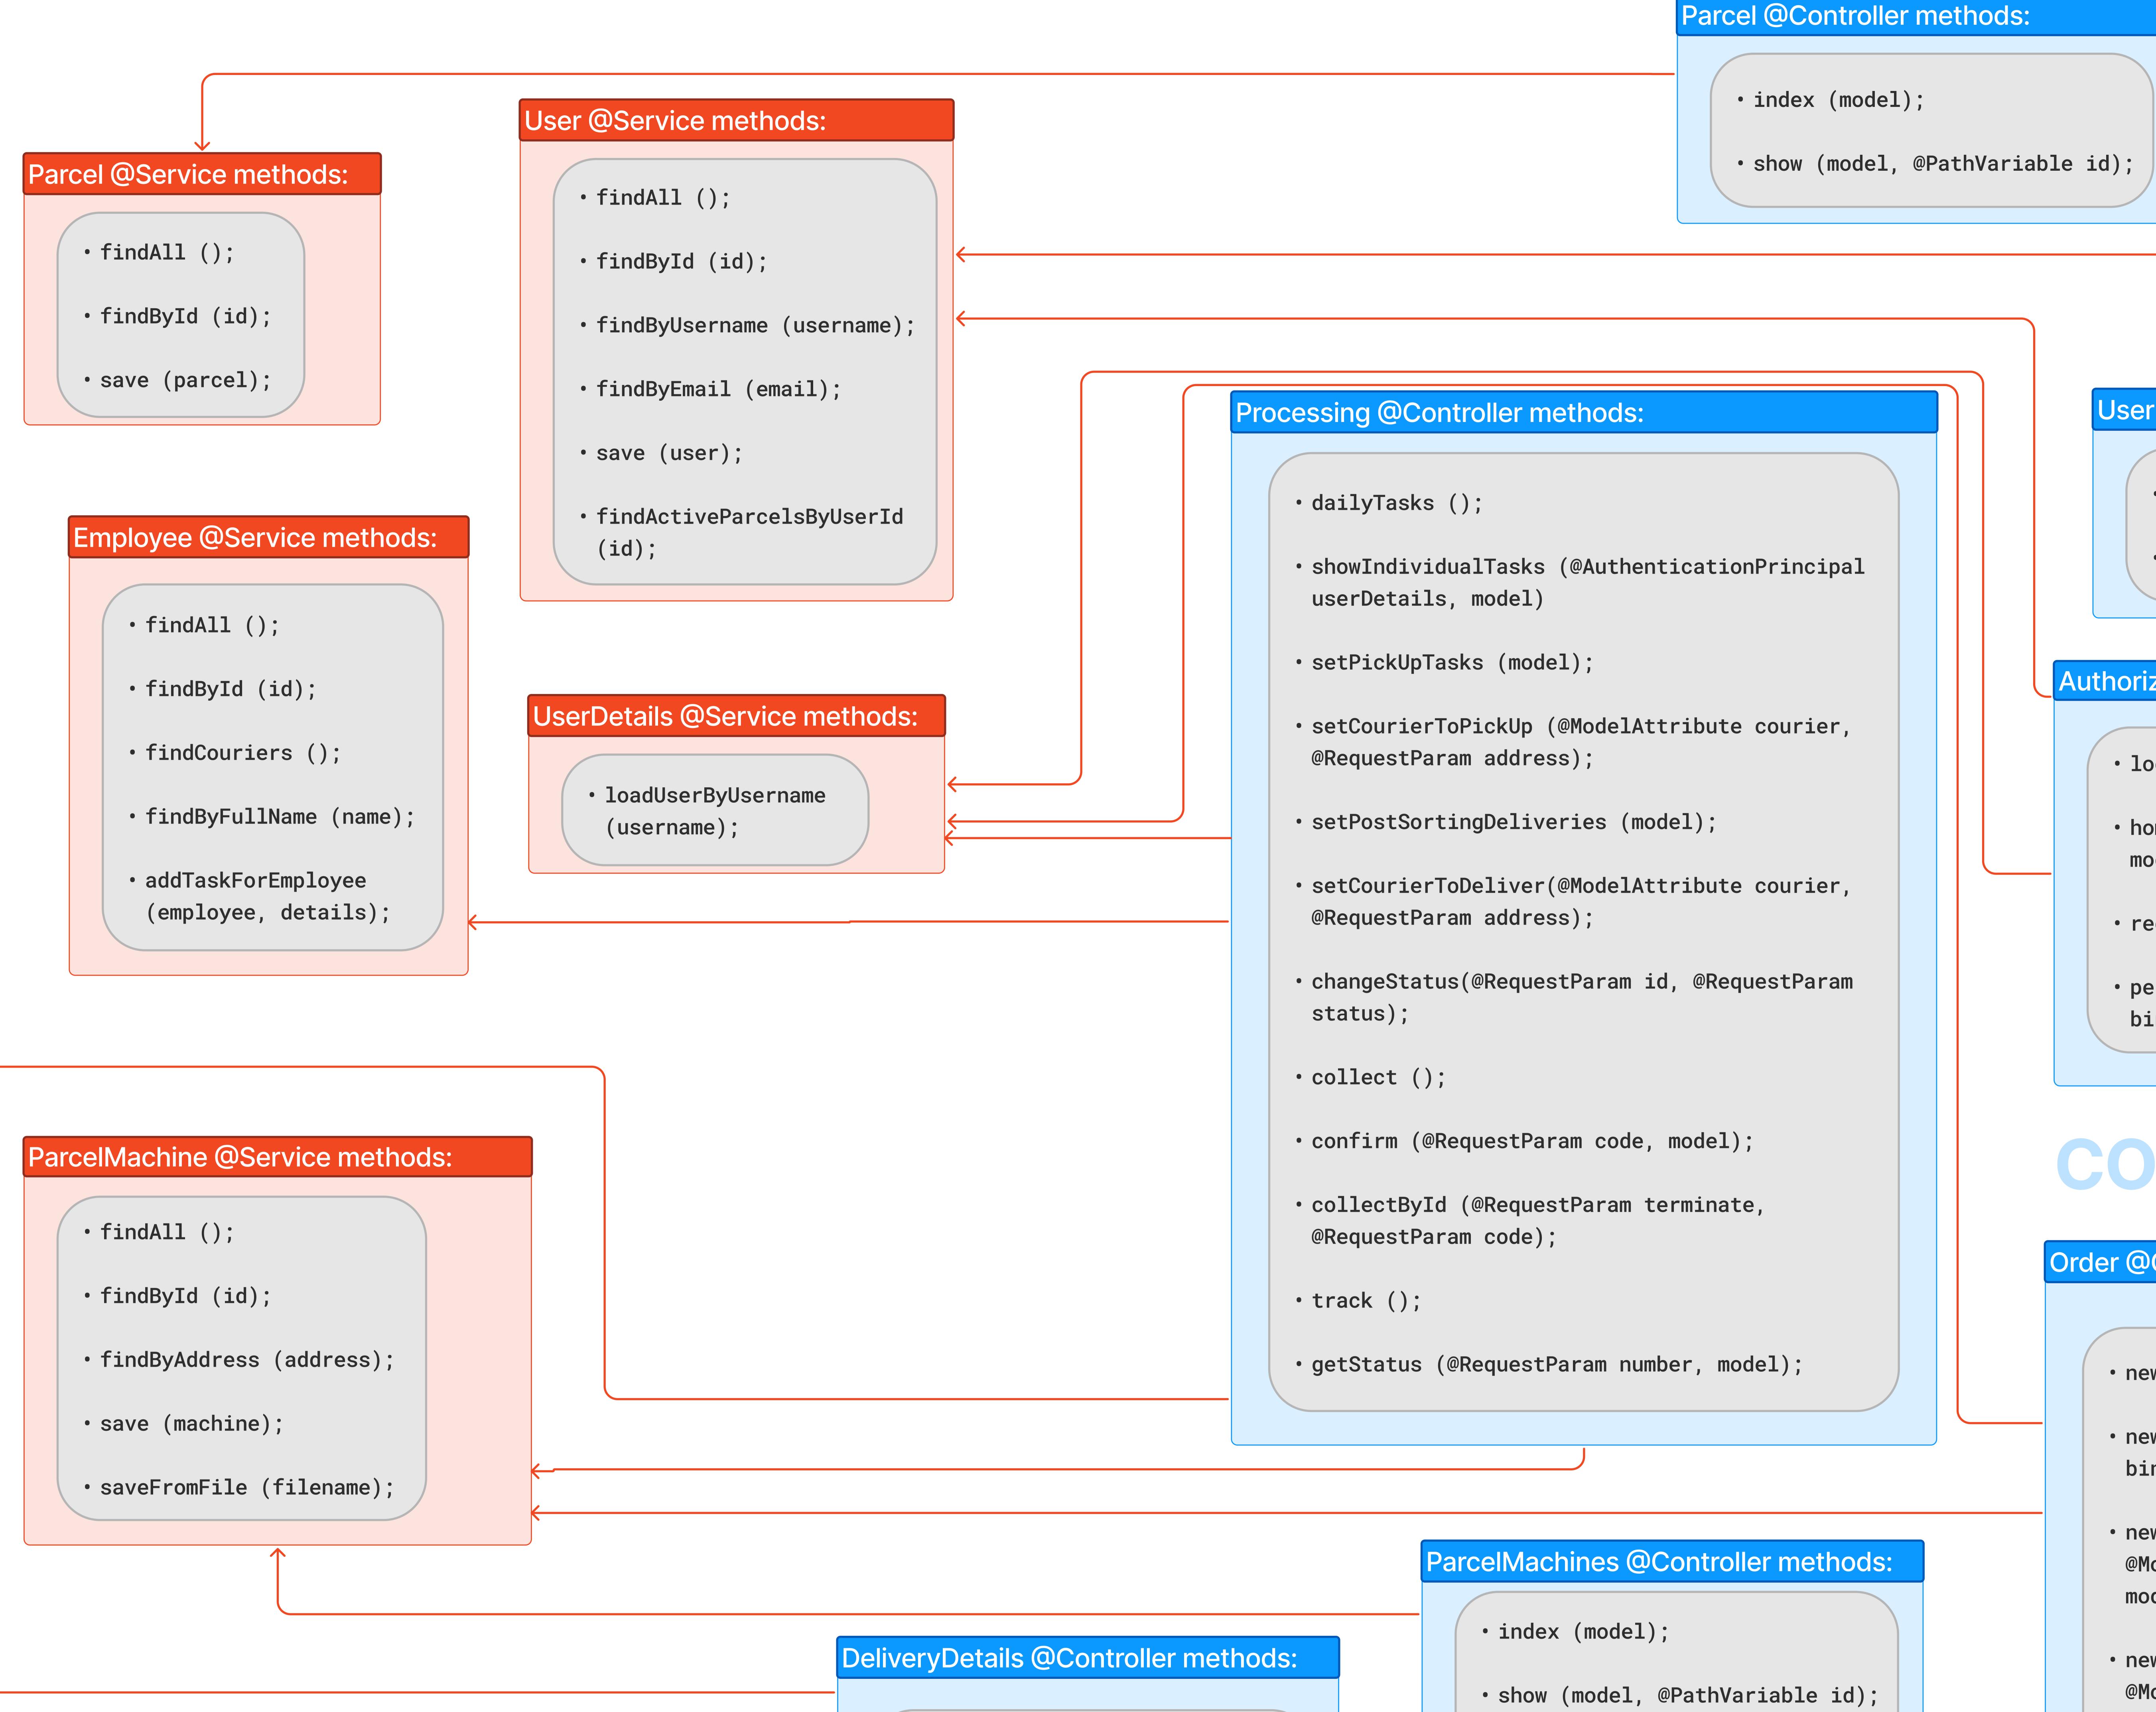

# 

#### Order @Controller methods:

- newParcel (model);
- newDetails (@ModelAttribute parcel, bindingResult, model);
- newDispatchAddress (@ModelAttribute parcel, @ModelAttribute details, bindingResult, model);
- newDestinationAddress (@ModelAttribute parcel, @ModelAttribute details, @ModelAttribute dispatchMachine, model);
- confirmation (@AuthenticationPrincipal userDetails, @ModelAttribute parcel, @ModelAttribute details, @ModelAttribute destinationMachine, model);
- create (@AuthenticationPrincipal userDetails, @ModelAttribute parcel, @ModelAttribute details, terminate, model, SessionStatus sessionStatus)

- index (model);
- show (model, @PathVariable id);

initialize();

## OrderProcessing @Service methods:

- create (user, parcel, details, machine1, machine2);
- assignBox (machine, parcel);
- releaseBox (machine, parcel);
- changeOccupancy (machine, parcel, adjustment)