


Jenkins Task - 2

EC2 provisioned:

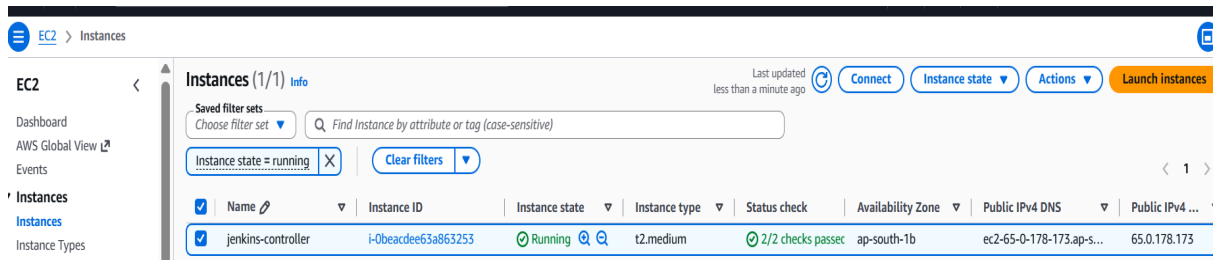

Java-21 and jenkins packages installed using apt package manager

followed - <https://www.jenkins.io/doc/book/installing/linux/#debianubuntu>

```
ubuntu@ip-172-31-67-130:~$ sudo spt update
sudo: 'spt': command not found
ubuntu@ip-172-31-67-130:~$ sudo apt update
Hit:1 http://us-east-1.ec2.archive.ubuntu.com/ubuntu resolute InRelease
Hit:2 http://us-east-1.ec2.archive.ubuntu.com/ubuntu resolute-updates InRelease
Hit:3 http://us-east-1.ec2.archive.ubuntu.com/ubuntu resolute-backports InRelease
Ign:4 https://pkg.jenkins.io/debian-stable binary/ InRelease
Hit:5 http://security.ubuntu.com/ubuntu resolute-security InRelease
Get:6 https://pkg.jenkins.io/debian-stable binary/ Release [2044 B]
Get:7 https://pkg.jenkins.io/debian-stable binary/ Release.gpg [833 B]
Get:8 https://pkg.jenkins.io/debian-stable binary/ Packages [31.3 kB]
Fetched 34.1 kB in 0s (171 kB/s)
71 packages can be upgraded. Run 'apt list --upgradable' to see them.
ubuntu@ip-172-31-67-130:~$ sudo apt install jenkins
Installing:
jenkins

Installing dependencies:
net-tools

Summary:
Upgrading: 0, Installing: 2, Removing: 0, Not Upgrading: 71
Download size: 101 MB
Space needed: 102 MB / 4199 MB available
Continue? [Y/n] Y
Get:1 http://us-east-1.ec2.archive.ubuntu.com/ubuntu resolute/main amd64v3 net-tools amd64 2.10-2ubuntu1 [152 kB]
Get:2 https://pkg.jenkins.io/debian-stable binary/ jenkins 2.568.1 [101 MB]
Fetched 101 MB in 10s (10.5 MB/s)
```

```
No VM guests are running outdated hypervisor (qemu) binaries on this host.
ubuntu@ip-172-31-67-130:~$ sudo systemctl status jenkins
jenkins.service - Jenkins Continuous Integration Server
Loaded: loaded (/usr/lib/systemd/system/jenkins.service; enabled; preset: enabled)
Active: active (running) since Mon 2026-07-20 18:41:17 UTC; 50s ago
Invocation: 16090ad4bfc94de8846f094d820332f2
Main PID: 4330 (java)
Tasks: 47 (limit: 3807)
Memory: 588M (peak: 602.1M)
CPU: 15.064s
CGroup: /system.slice/jenkins.service
└─4330 /usr/bin/java -Djava.awt.headless=true -jar /usr/share/java/jenkins.war --webroot=/var/cache/jenkins/war --httpPort=8080

Jul 20 18:41:13 ip-172-31-67-130 jenkins[4330]: [LF]> This may also be found at: /var/lib/jenkins/secrets/initialAdminPassword
Jul 20 18:41:13 ip-172-31-67-130 jenkins[4330]: [LF]>
Jul 20 18:41:13 ip-172-31-67-130 jenkins[4330]: [LF]>
Jul 20 18:41:13 ip-172-31-67-130 jenkins[4330]: [LF]>
Jul 20 18:41:13 ip-172-31-67-130 jenkins[4330]: [LF]>
Jul 20 18:41:17 ip-172-31-67-130 jenkins[4330]: 2026-07-20 18:41:17.033+0000 [id=37] INFO jenkins.InitReactorRunner$1onAttained: Completed initialization
Jul 20 18:41:17 ip-172-31-67-130 jenkins[4330]: 2026-07-20 18:41:17.052+0000 [id=30] INFO hudson.lifecycle.Lifecycle$onReady: Jenkins is fully up and running
Jul 20 18:41:17 ip-172-31-67-130 systemd[1]: Started jenkins.service - Jenkins Continuous Integration Server.
Jul 20 18:41:17 ip-172-31-67-130 jenkins[4330]: 2026-07-20 18:41:17.275+0000 [id=56] INFO h.m.DownloadService$Downloadable$load: Obtained the updated data file
Jul 20 18:41:17 ip-172-31-67-130 jenkins[4330]: 2026-07-20 18:41:17.279+0000 [id=56] INFO hudson.util.Retrier$start: Performed the action check updates server s
```

Add port 8080 to security group of EC2 instance to access the jenkins URL from browser

EC2 > Security Groups > sg-01b750cbddb0b332d > Edit inbound rules

Edit inbound rules [Info](#)

Inbound rules control the incoming traffic that's allowed to reach the instance.

Security group rule ID	Type Info	Protocol Info	Port range Info	Source Info	Description - optional Info	Delete
sg-0c8d42bbd63d89220	HTTP	TCP	80	Custom	0.0.0.0/0	Delete
sg-0a622a04c0f8f354f	HTTPS	TCP	443	Custom	0.0.0.0/0	Delete
sg-079379e1cbff7863b	SSH	TCP	22	Custom	0.0.0.0/0	Delete
-	Custom TCP	TCP	8080	Anywhere...	0.0.0.0/0	Delete

[Add rule](#)

Setup credentials, create a job.

65.0.178.173:8080/login?from=%2F

Getting Started

Unlock Jenkins

To ensure Jenkins is securely set up by the administrator, a password has been written to the log (not sure where to find it?) and this file on the server:

```
/var/lib/jenkins/secrets/initialAdminPassword
```

Please copy the password from either location and paste it below.

Administrator password

[Continue](#)

Installing required plugins for email

Plugins

- Updates
- Available plugins
- Installed plugins
- Advanced settings
- Download progress


[Install](#)

☒ **Email Extension Template** 249.v81d6ea_f33f2e
[Build Notifiers](#) [emailext](#)
This plugin allows administrators to create global templates for the Extended Email Publisher.
6 mo 6 days ago 80

This plugin is up for adoption! We are looking for new maintainers. Visit our [Adopt a Plugin](#) initiative for more information.

☐ **GitHub Integration** 0.7.4

SMTP configuration validate

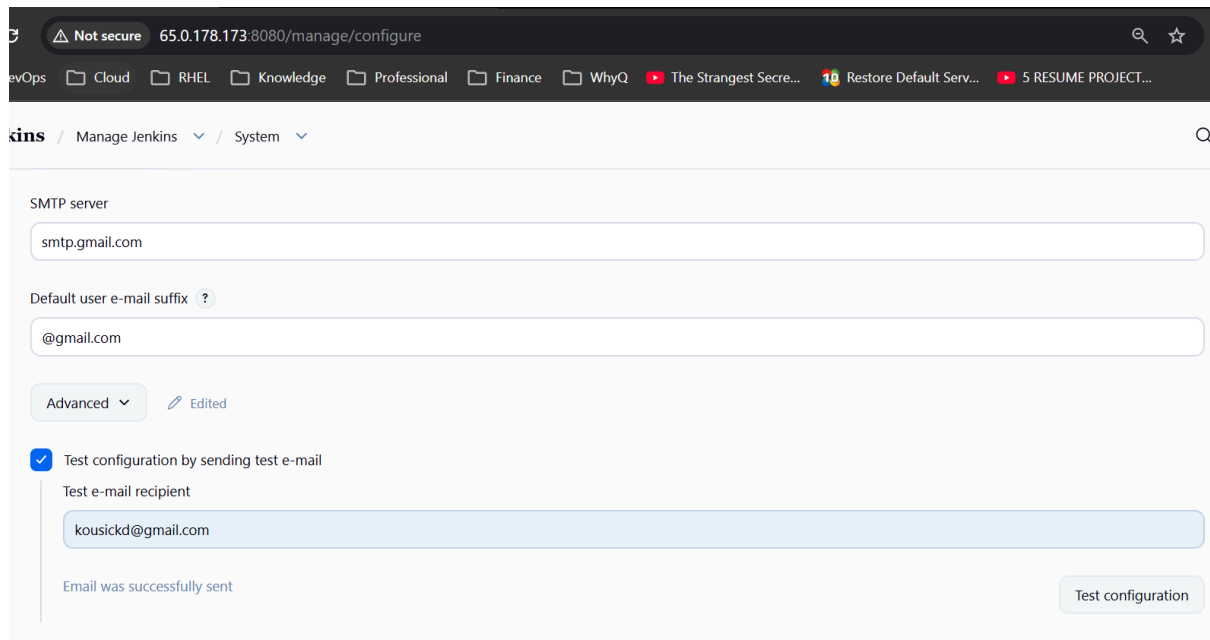

The screenshot shows the Jenkins 'Manage Jenkins' > 'System' configuration page. Under the 'SMTP server' section, the 'smtp.gmail.com' field is filled. Below it, the 'Default user e-mail suffix' is '@gmail.com'. There is a toggle for 'Test configuration by sending test e-mail' which is checked. The 'Test e-mail recipient' field contains 'kousickd@gmail.com'. A message at the bottom left says 'Email was successfully sent'. A 'Test configuration' button is at the bottom right.

Not secure 65.0.178.173:8080/manage/configure

Manage Jenkins / System

SMTP server

smtp.gmail.com

Default user e-mail suffix ?

@gmail.com

Advanced Edited

☒ Test configuration by sending test e-mail


Test e-mail recipient

kousickd@gmail.com

Email was successfully sent

Test configuration

Github webhoooot setup done

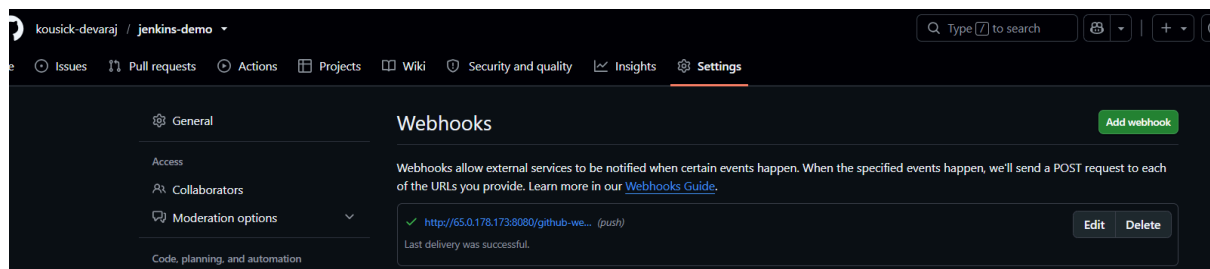

The screenshot shows the Jenkins 'Settings' page for the 'jenkins-demo' instance. The 'Webhooks' section is active. It shows a list of webhooks with one entry: 'http://65.0.178.173:8080/github-we... (push)'. The status is 'Last delivery was successful'. There are 'Edit' and 'Delete' buttons for this webhook. An 'Add webhook' button is at the top right.

kousick-devaraj / jenkins-demo

Type to search

Issues Pull requests Actions Projects Wiki Security and quality Insights Settings

General

Access

Collaborators

Moderation options

Code, planning, and automation

Webhooks

Add webhook


Webhooks allow external services to be notified when certain events happen. When the specified events happen, we'll send a POST request to each of the URLs you provide. Learn more in our [Webhooks Guide](#).

✓ http://65.0.178.173:8080/github-we... (push)

Last delivery was successful.

Edit Delete

Job created, SCM updated, trigger updated and post build - email notification configured

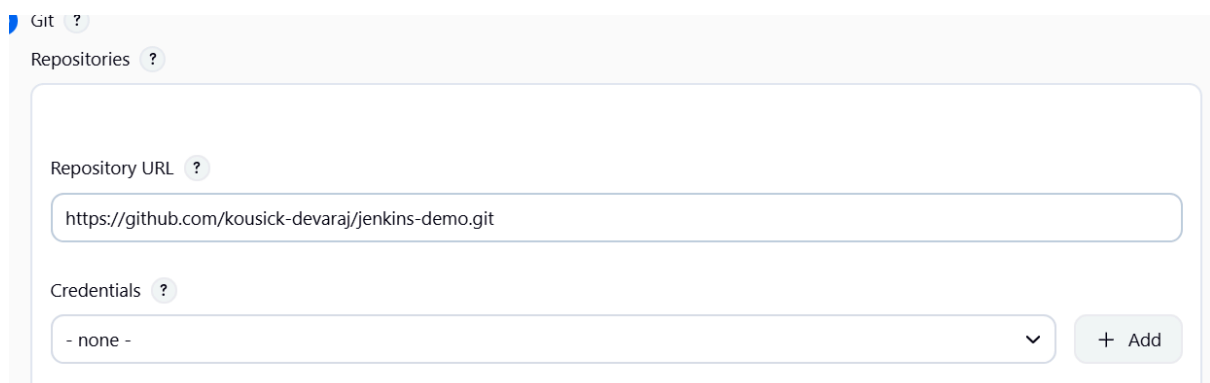

The screenshot shows the Jenkins 'Repository' configuration page. The 'Repository URL' field is filled with 'https://github.com/kousick-devaraj/jenkins-demo.git'. The 'Credentials' dropdown menu is set to '- none -'. There is an 'Add' button at the bottom right.

Git ?

Repositories ?

Repository URL ?

https://github.com/kousick-devaraj/jenkins-demo.git

Credentials ?

- none -

+ Add

Triggers

Set up automated actions that start your build based on specific events, like code changes or scheduled times.

- ☐ Trigger builds remotely (e.g., from scripts) ?
- ☐ Build after other projects are built ?
- ☐ Build periodically ?
- ☒ GitHub hook trigger for GITScm polling ?
- ☐ Poll SCM ?

Post-build Actions

Define what happens after a build completes, like sending notifications, archiving artifacts, or triggering other jobs.

E-mail Notification ?

Recipients

Whitespace-separated list of recipient addresses. May reference build parameters like \$PARAM. E-mail will be sent when a build fails, becomes unstable or returns to stable.

kousickd@gmail.com

☒ Send e-mail for every unstable build

?

☐ Send separate e-mails to individuals who broke the build

New script file added to git

```
JENKINS-DEMO
└─ app.py
└─ Jenkinsfile
└─ README.md
└─ script.sh

$ script.sh
1  #!/bin/bash
2  echo "Build triggered successfully at $(date)"
3  echo "Jenkins task2 completed"

PROBLEMS OUTPUT TERMINAL ...
powershell + ▾ 🗑 ... | 🔄 ✕

● PS C:\Users\Kousick Devaraj\Desktop\DevOps\jenkins-demo> git add
Nothing specified, nothing added.
hint: Maybe you wanted to say 'git add .'
hint: Disable this message with "git config set advice.addEmptyPathsSpec false"
● PS C:\Users\Kousick Devaraj\Desktop\DevOps\jenkins-demo> git add .\script.sh
● PS C:\Users\Kousick Devaraj\Desktop\DevOps\jenkins-demo> git status
On branch main
Your branch is up to date with 'origin/main'.

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        new file:   script.sh

● PS C:\Users\Kousick Devaraj\Desktop\DevOps\jenkins-demo> git commit -m "Added scri
ipt to print completion statement"
[main 74d6c97] Added script to print completion statement
 1 file changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 script.sh
● PS C:\Users\Kousick Devaraj\Desktop\DevOps\jenkins-demo> git push -u origin main
```

Build started running

The screenshot shows the Jenkins web interface for a job named 'github-auto-build'. The browser address bar indicates the URL is '65.0.178.173:8080/job/github-auto-build/'. The page has a dark header with navigation links: DevOps, Cloud, RHEL, Knowledge, Professional, Finance, WhyQ, and The Stranger. The main content area has a left sidebar with icons for Status, Changes, Workspace, Build Now, Delete Project, GitHub Hook Log, Configure, and Rename. The main panel displays the job name 'github-auto-build' and its description 'Git auto build job'. Below this, there is a 'Permalinks' section. A 'Builds' dropdown menu is open, showing a list of builds. The first build, #1, is highlighted and shows a green checkmark icon, indicating it is successful, with a timestamp of 7:06 AM.

Output:

The screenshot shows the Jenkins console output for build #10 of the 'github-auto-build' job. The browser address bar indicates the URL is '65.0.178.173:8080/job/github-auto-build/10/console'. The page has a dark header with navigation links: DevOps, Cloud, RHEL, Knowledge, Professional, Finance, WhyQ, The Strangest Sec..., Restore Default Serv..., and 5 R. The main content area has a left sidebar with icons for Status, Changes, Console Output, Delete build '#10', Polling Log, Git Build Data, Edit build information, and Previous Build. The main panel displays the console output, which shows the build process starting with a GitHub push by kousick-devaraj. The output includes the following commands and their results:

```
Started by GitHub push by kousick-devaraj
Running as SYSTEM
Building in workspace /var/lib/jenkins/workspace/github-auto-build
The recommended git tool is: NONE
No credentials specified
> git rev-parse --resolve-git-dir /var/lib/jenkins/workspace/github-auto-build/.git # timeout=10
Fetching changes from the remote Git repository
> git config remote.origin.url https://github.com/kousick-devaraj/jenkins-demo.git # timeout=10
Fetching upstream changes from https://github.com/kousick-devaraj/jenkins-demo.git
> git --version # timeout=10
> git --version # 'git version 2.53.0'
> git fetch --tags --force --progress -- https://github.com/kousick-devaraj/jenkins-demo.git +refs/heads/*:refs/remotes/origin/* # timeout=10
> git rev-parse refs/remotes/origin/main^{commit} # timeout=10
Checking out Revision 3aead8cd40f3cf17eb2d8e8f81a26fa0447ca487 (refs/remotes/origin/main)
> git config core.sparsecheckout # timeout=10
> git checkout -f 3aead8cd40f3cf17eb2d8e8f81a26fa0447ca487 # timeout=10
Commit message: "Removed last line"
> git rev-list --no-walk 26f26f04c01d7503ed5ec4d9ceeab62dea7d195 # timeout=10
No emails were triggered.
[github-auto-build] $ /bin/sh -xe /tmp/jenkins13818913546607979854.sh
+ echo Build number: 10
Build number: 10
+ echo Job name: github-auto-build
Job name: github-auto-build
+ echo =====script execution starts=====
=====script execution starts=====
sh cat sh
```

```
=====script execution starts=====
+ sh script.sh
script.sh: 1: ��#!/bin/bash
: not found
Hello, Message from Git scripts updated
Build triggered successfully at Sat Jul 25 08:15:46 UTC 2026
Jenkins task2 completed
+ echo ===== the end =====
===== the end =====
Email was triggered for: Always
Email was triggered for: Success
Sending email for trigger: Always
Warning: user (id: kousickd, email: kousickd@gmail.com) is not a recognized user, but sending mail anyway
The build was not caused by a user!Sending email to: kousickd@gmail.com kousick2smart@gmail.com
Sending email for trigger: Success
Warning: user (id: kousickd, email: kousickd@gmail.com) is not a recognized user, but sending mail anyway
Sending email to: kousickd@gmail.com
Finished: SUCCESS
```

Email triggered:

github-auto-build - Build # 10 - Successful! 🔍 Inbox x



kousickd@gmail.com

to me, kousick2smart ▾

github-auto-build - Build # 10 - Successful:

Check console output at <http://65.0.178.173:8080/github-webhook/job/github-auto-build/10/> to view the results.

One attachment • Scanned by Gmail ⓘ Add to Drive

