


How `printf()` accesses its optional arguments?

```
#include <stdio.h>

int main()
{
    int id=100, age=25; char *name = "Bob Smith";
    printf("ID: %d, Name: %s, Age: %d\n", id, name, age);
}
```

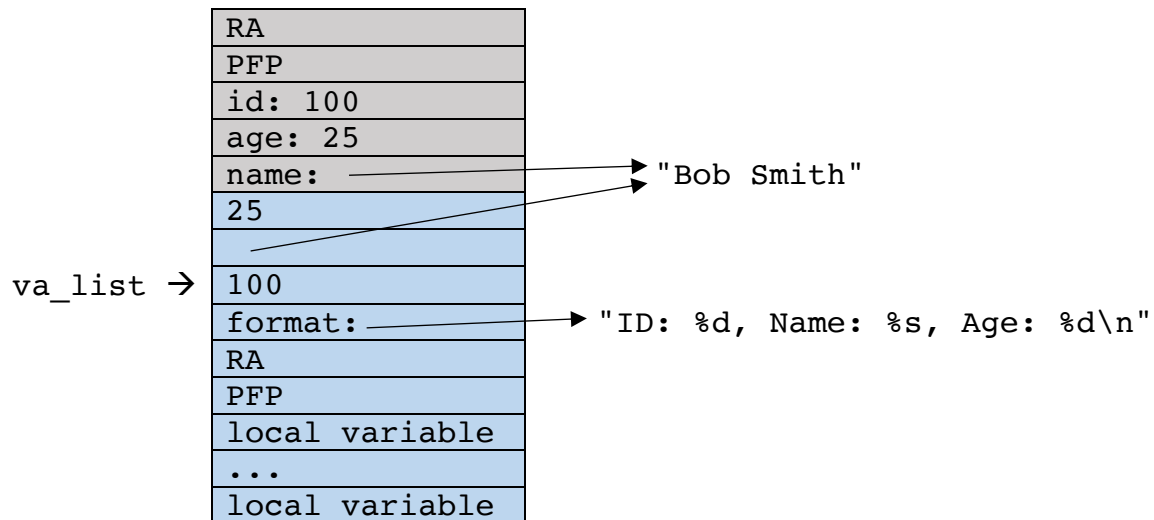

Stack frame of `main()`

Stack frame of `printf()`