





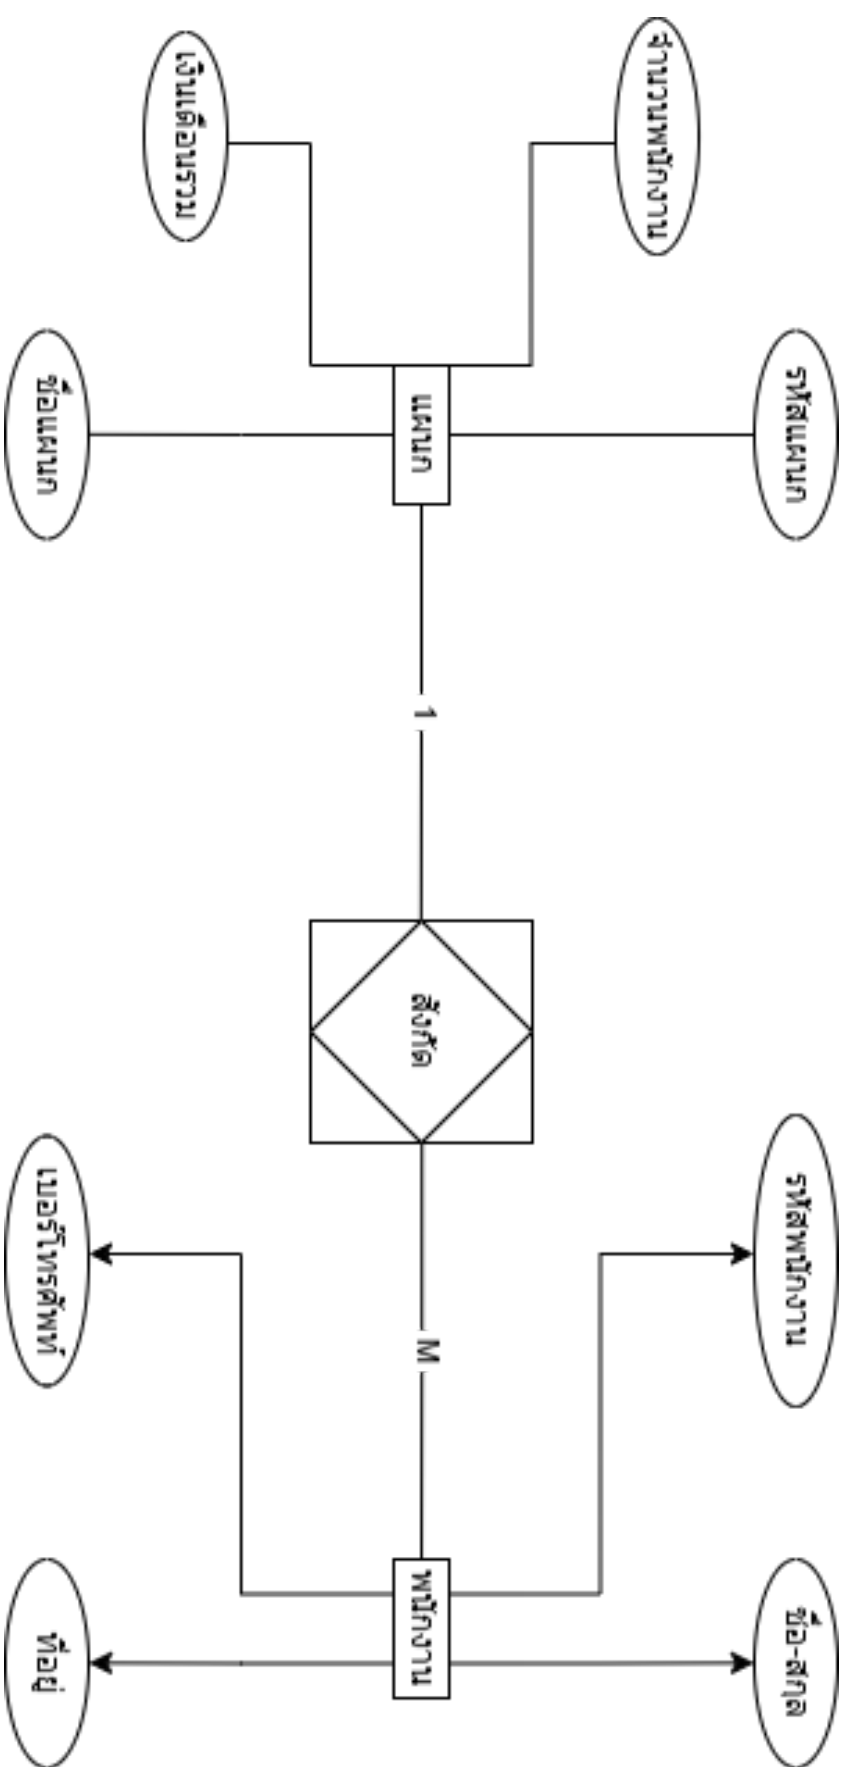

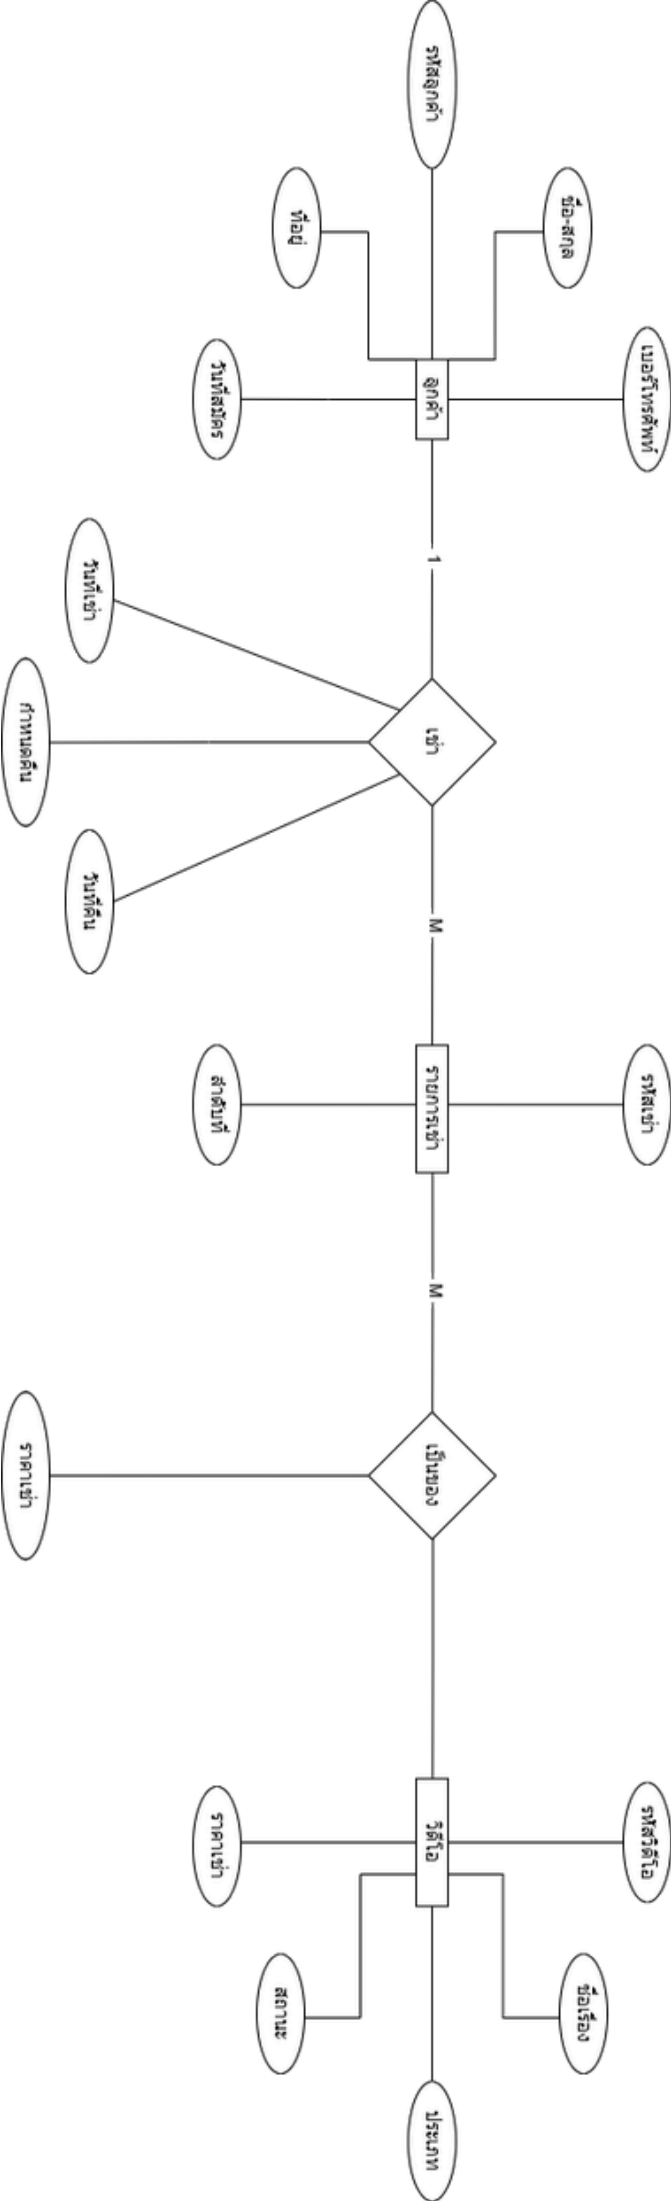

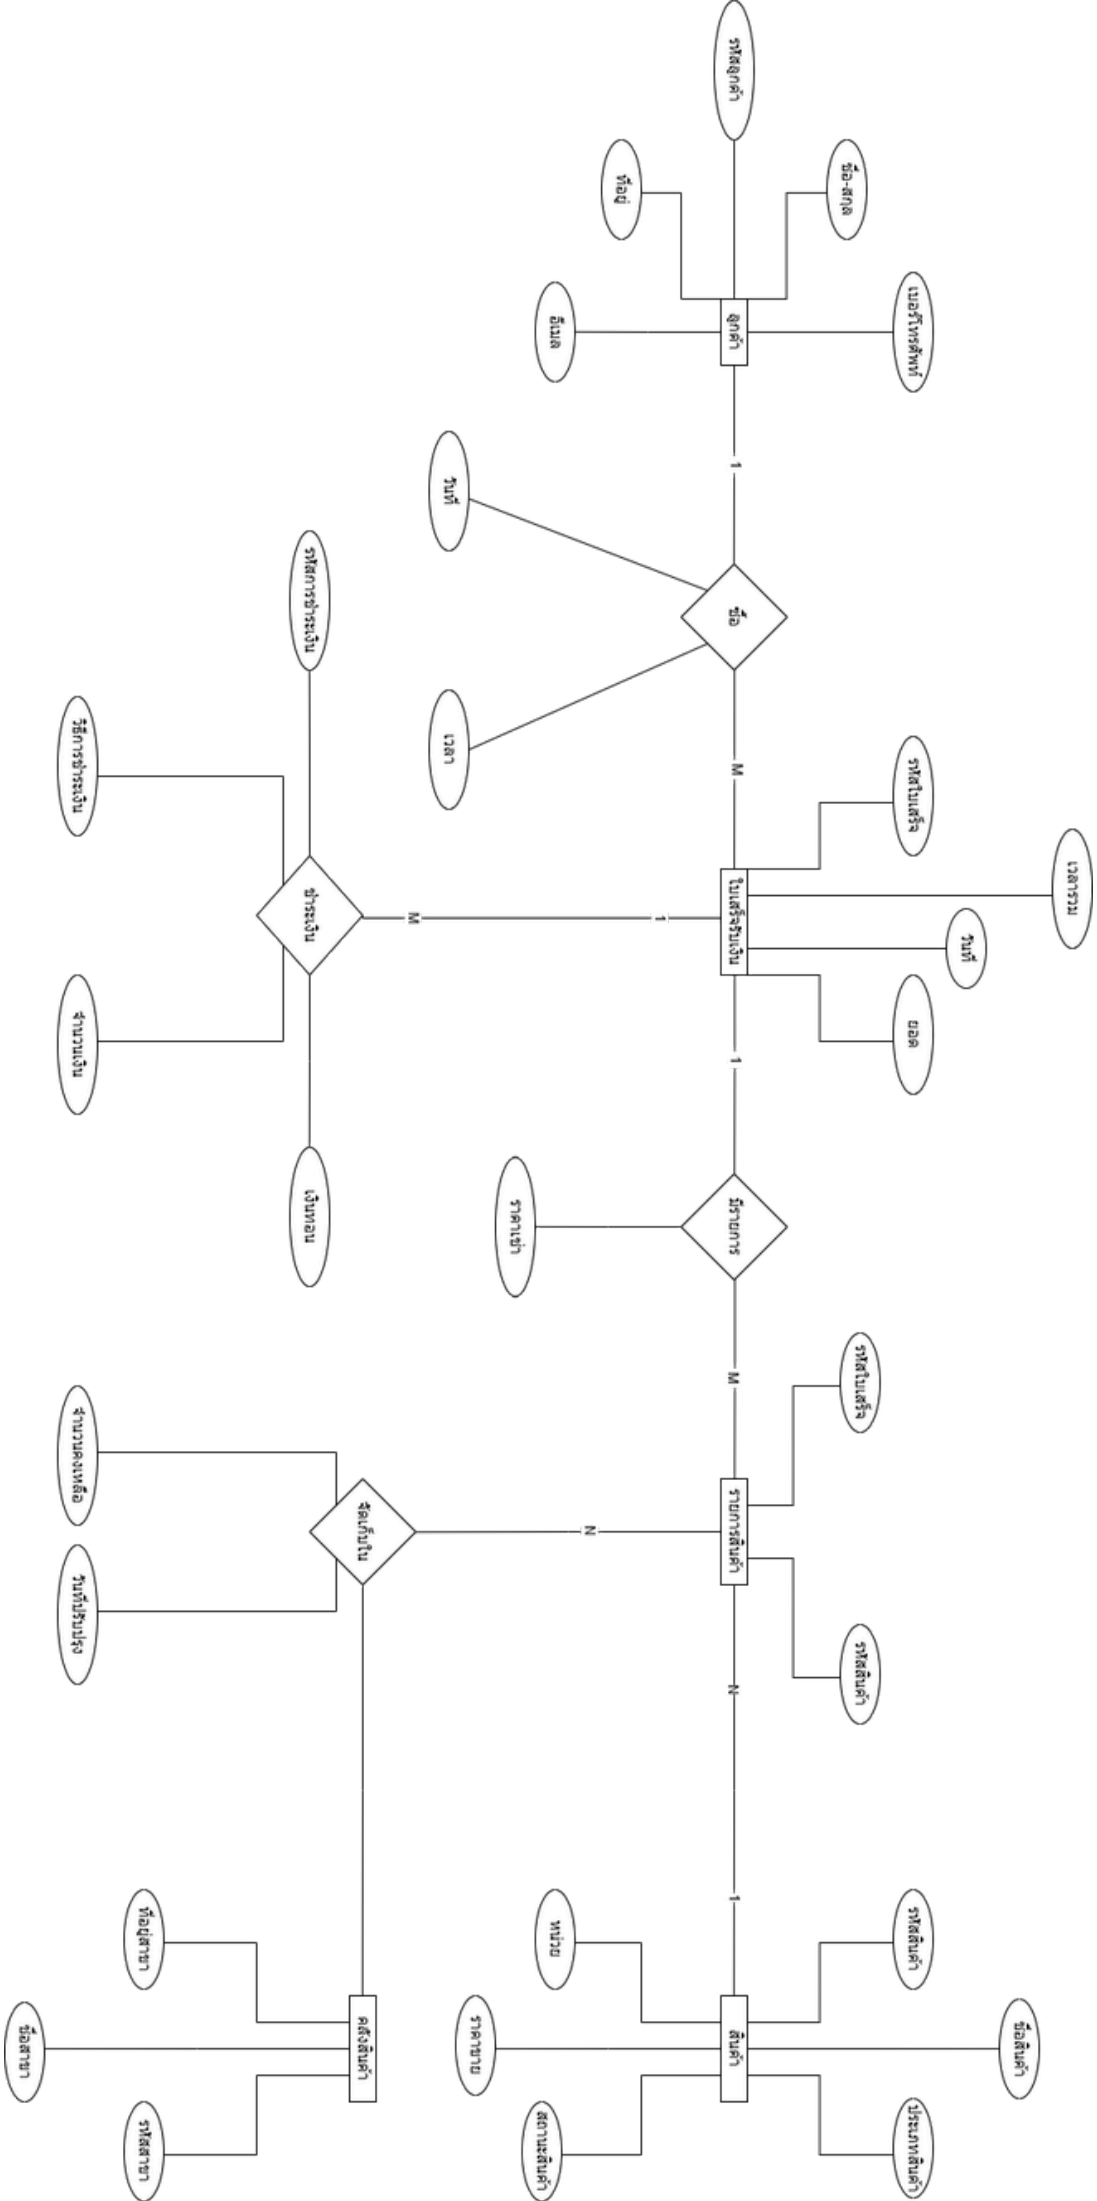

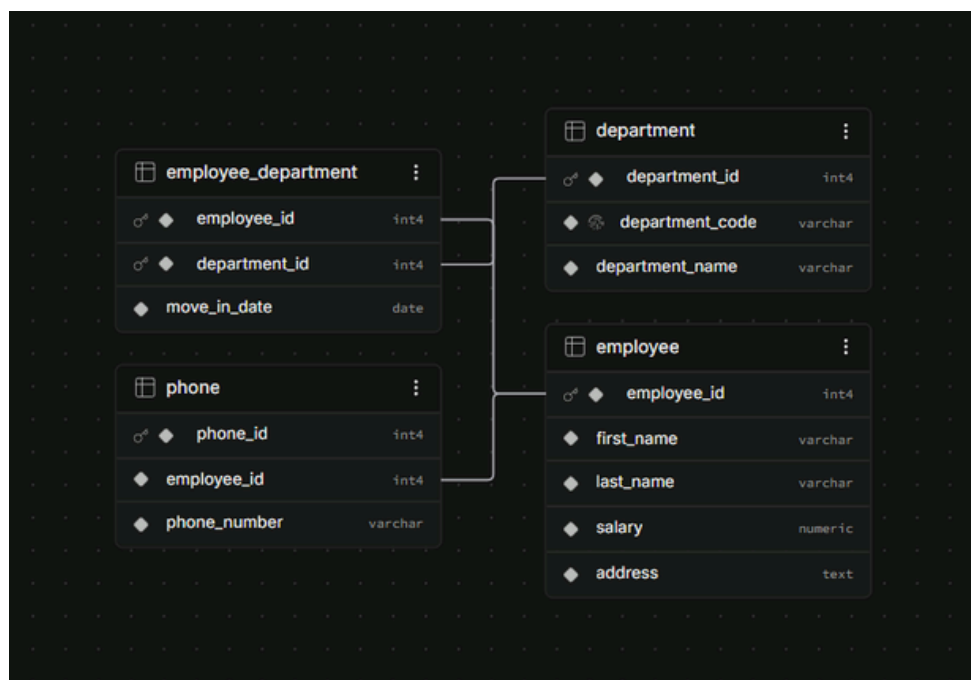

```
1 CREATE table department (  
2   department_id SERIAL primary KEY,  
3   department_code varchar(10) unique not null,  
4   department_name varchar(100) not null  
5 )
```

Results Chart

Success. No rows returned

```
1 create table employee (  
2     employee_id SERIAL primary key,  
3     first_name varchar(100) not null,  
4     last_name varchar(100) not null,  
5     salary decimal(10,2) not null,  
6     address text not null  
7 )
```

Results Chart

Success. No rows returned

```
1 create table employee_department (  
2     employee_id int not null,  
3     department_id int not null,  
4     move_in_date date not null,  
5  
6     primary key (employee_id, department_id),  
7  
8     foreign key (employee_id)  
9         | references employee (employee_id),  
10  
11     foreign key (department_id)  
12         | references department(department_id)  
13 )
```

Results Chart

Success. No rows returned

```
1 create table phone(  
2   phone_id SERIAL primary key,  
3   employee_id int not null,  
4   phone_number varchar(20) not null,  
5  
6   foreign key (employee_id)  
7   | references employee(employee_id)  
8 )
```

Results Chart

Success. No rows returned