

Vectorization with Numpy

This tutorial will give you a brief introduction to vectorization and how Numpy helps in this process. Let's get started!

```
In [ ]: #!git clone https://github.com/SanVik2000/EE5179-Final.git
```

1 - Building basic functions with numpy


Numpy is the main package for scientific computing in Python. It is maintained by a large community (www.numpy.org). In this exercise you will learn several key numpy functions such as `np.exp`, `np.log`, and `np.reshape`. You will need to know how to use these functions for future assignments.

1.1 - sigmoid function, `np.exp()`

Before using `np.exp()`, you will use `math.exp()` to implement the sigmoid function. You will then see why `np.exp()` is preferable to `math.exp()`.

Exercise: Build a function that returns the sigmoid of a real number x . Use `math.exp(x)` for the exponential function.

Reminder: $\text{sigmoid}(x) = \frac{1}{1+e^{-x}}$ is sometimes also known as the logistic function. It is a non-linear function used not only in Machine Learning (Logistic Regression), but also in Deep Learning.

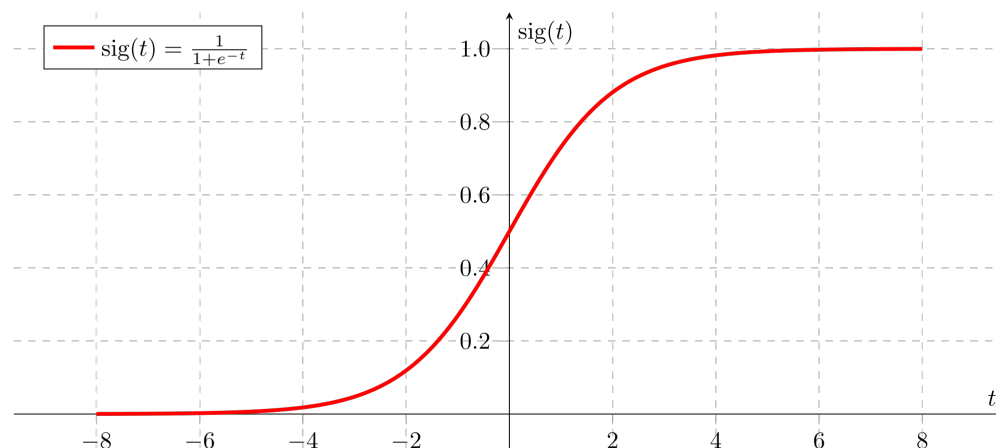

To refer to a function belonging to a specific package you could call it using `package_name.function()`. Run the code below to see an example with `math.exp()`.

```
In [ ]: # GRADED FUNCTION: basic_sigmoid

import math

def basic_sigmoid(x):
    """
    Compute sigmoid of x.

    Arguments:
    x -- A scalar

    Return:
    s -- sigmoid(x)
    """

    ### START CODE HERE ### (≈ 1 line of code)

    return 1/(1+(math.exp(-x)))
    ### END CODE HERE ###

    return s
```

```
In [ ]: basic_sigmoid(3)
```

```
Out[ ]: 0.9525741268224334
```


Expected Output:

```
**
basic_sigmoid(3)    0.9525741268224334
**
```

```
In [ ]: import matplotlib.pyplot as plt
import numpy as np

x_list = []
y_list = []
for x in np.arange(-10.0, 10.1, 0.1):
    x_list.append(x)
    y_list.append(basic_sigmoid(x))

ax = plt.gca()
ax.spines['top'].set_color('none')
ax.spines['bottom'].set_position('zero')
ax.spines['left'].set_position('zero')
ax.spines['right'].set_color('none')
ax.plot(x_list, y_list)
plt.show()
```

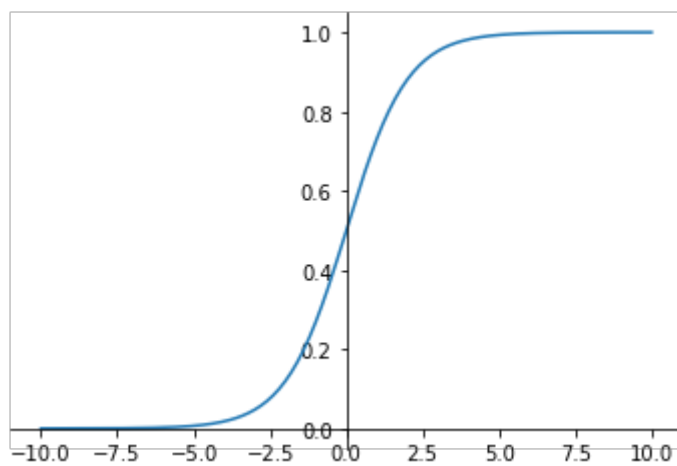

Actually, we rarely use the "math" library in deep learning because the inputs of the functions are real numbers. In deep learning we mostly use matrices and vectors. This is why numpy is more useful.

```
In [ ]: ### One reason why we use "numpy" instead of "math" in Deep Learning ###  
x = [1, 2, 3]  
basic_sigmoid(x) # you will see this give an error when you run it, becau
```

```

-----
TypeError                                Traceback (most recent call las
/home/koushik/Documents/DLI_EE5179/DLI5179/Tutorial-2/Task02_Vectorizatio
ipynb Cell 9 in <cell line: 3>()
    <a href='vscode-notebook-cell:/home/koushik/Documents/DLI_EE5179/DL
179/Tutorial-2/Task02_Vectorization.ipynb#ch00000008?line=0'>1</a> ### One
eason why we use "numpy" instead of "math" in Deep Learning ###
    <a href='vscode-notebook-cell:/home/koushik/Documents/DLI_EE5179/DL
179/Tutorial-2/Task02_Vectorization.ipynb#ch00000008?line=1'>2</a> x = [1,
2, 3]
----> <a href='vscode-notebook-cell:/home/koushik/Documents/DLI_EE5179/DL
179/Tutorial-2/Task02_Vectorization.ipynb#ch00000008?line=2'>3</a> basic_s
moid(x)

/home/koushik/Documents/DLI_EE5179/DLI5179/Tutorial-2/Task02_Vectorizatio
ipynb Cell 9 in basic_sigmoid(x)
    <a href='vscode-notebook-cell:/home/koushik/Documents/DLI_EE5179/DL
179/Tutorial-2/Task02_Vectorization.ipynb#ch00000008?line=5'>6</a> ""
    <a href='vscode-notebook-cell:/home/koushik/Documents/DLI_EE5179/DL
179/Tutorial-2/Task02_Vectorization.ipynb#ch00000008?line=6'>7</a> Compute
igmoid of x.
    <a href='vscode-notebook-cell:/home/koushik/Documents/DLI_EE5179/DL
179/Tutorial-2/Task02_Vectorization.ipynb#ch00000008?line=7'>8</a>
    (...)
    <a href='vscode-notebook-cell:/home/koushik/Documents/DLI_EE5179/DLI
79/Tutorial-2/Task02_Vectorization.ipynb#ch00000008?line=12'>13</a> s -- s
moid(x)
    <a href='vscode-notebook-cell:/home/koushik/Documents/DLI_EE5179/DLI
79/Tutorial-2/Task02_Vectorization.ipynb#ch00000008?line=13'>14</a> ""
    <a href='vscode-notebook-cell:/home/koushik/Documents/DLI_EE5179/DLI
79/Tutorial-2/Task02_Vectorization.ipynb#ch00000008?line=15'>16</a> ### ST
T CODE HERE ### (~ 1 line of code)
----> <a href='vscode-notebook-cell:/home/koushik/Documents/DLI_EE5179/DLI
79/Tutorial-2/Task02_Vectorization.ipynb#ch00000008?line=17'>18</a> return
/(1+(math.exp(-x)))
    <a href='vscode-notebook-cell:/home/koushik/Documents/DLI_EE5179/DLI
79/Tutorial-2/Task02_Vectorization.ipynb#ch00000008?line=18'>19</a> ### EN
CODE HERE ###
    <a href='vscode-notebook-cell:/home/koushik/Documents/DLI_EE5179/DLI
79/Tutorial-2/Task02_Vectorization.ipynb#ch00000008?line=20'>21</a> return

TypeError: bad operand type for unary -: 'list'

```

In fact, if $x = (x_1, x_2, \dots, x_n)$ is a row vector then $np.exp(x)$ will apply the exponential function to every element of x . The output will thus be: $np.exp(x) = (e^{x_1}, e^{x_2}, \dots, e^{x_n})$

```

In [ ]: import numpy as np

# example of np.exp
x = np.array([1, 2, 3])
print(np.exp(x)) # result is (exp(1), exp(2), exp(3))

[ 2.71828183  7.3890561  20.08553692]

```

Furthermore, if x is a vector, then a Python operation such as $s = x + 3$ or $s = \frac{1}{x}$ will output s as a vector of the same size as x .

```

In [ ]: # example of vector operation
x = np.array([1, 2, 3])
print (x + 3)

```

[4 5 6]

Any time you need more info on a numpy function, we encourage you to look at [the official documentation](#).

Exercise: Implement the sigmoid function using numpy.

Instructions: x could now be either a real number, a vector, or a matrix. The data structures we use in numpy to represent these shapes (vectors, matrices...) are called numpy arrays. You don't need to know more for now.

$$\text{For } x \in \mathbb{R}^n, \text{sigmoid}(x) = \text{sigmoid} \begin{pmatrix} x_1 \\ x_2 \\ \dots \\ x_n \end{pmatrix} = \begin{pmatrix} \frac{1}{1+e^{-x_1}} \\ \frac{1}{1+e^{-x_2}} \\ \dots \\ \frac{1}{1+e^{-x_n}} \end{pmatrix} \quad (1)$$

```
In [ ]: import numpy as np

def sigmoid(x):
    """
    Compute the sigmoid of x

    Arguments:
    x -- A scalar or numpy array of any size

    Return:
    s -- sigmoid(x)
    """

    ### START CODE HERE ### (≈ 1 line of code)
    return 1/(1+np.exp(-x))
    ### END CODE HERE ###

    return s
```

```
In [ ]: x = np.array([1, 2, 3])
sigmoid(x)
```

```
Out[ ]: array([0.73105858, 0.88079708, 0.95257413])
```

Expected Output:

```
**sigmoid([1,2,3])** array([ 0.73105858, 0.88079708, 0.95257413])
```

1.2 - Sigmoid gradient

As you've seen in lecture, you will need to compute gradients to optimize loss functions using backpropagation. Let's code your first gradient function.

Exercise: Implement the function `sigmoid_grad()` to compute the gradient of the sigmoid function with respect to its input x . The formula is:

$$\text{sigmoid_derivative}(x) = \sigma'(x) = \sigma(x)(1 - \sigma(x)) \quad (2)$$

You often code this function in two steps:

1. Set s to be the sigmoid of x . You might find your `sigmoid(x)` function useful.
2. Compute $\sigma'(x) = s(1 - s)$

```
In [ ]: # GRADED FUNCTION: sigmoid_derivative

def sigmoid_derivative(x):
    """
    Compute the gradient (also called the slope or derivative) of the sigmoid function.
    You can store the output of the sigmoid function into variables and reuse them.

    Arguments:
    x -- A scalar or numpy array

    Return:
    ds -- Your computed gradient.
    """

    ### START CODE HERE ### (~ 2 lines of code)
    return ( sigmoid(x) * (1- sigmoid(x)) )
    ### END CODE HERE ###

    return ds
```

```
In [ ]: x = np.array([1, 2, 3])
print ("sigmoid_derivative(x) = " + str(sigmoid_derivative(x)))

sigmoid_derivative(x) = [0.19661193 0.10499359 0.04517666]
```

Expected Output:

```
**sigmoid_derivative([1,2,3])** [ 0.19661193 0.10499359 0.04517666]
```



```
In [ ]: # GRADED FUNCTION: image2vector
def image2vector(image):
    """
    Argument:
    image -- a numpy array of shape (length, height, depth)

    Returns:
    v -- a vector of shape (length*height*depth, 1)
    """

    ### START CODE HERE ### (~ 1 line of code)

    v = image
    v = v.reshape((v.shape[0])*v.shape[1],v.shape[2])

    ### END CODE HERE ###

    return v
```

```
In [ ]: # This is a 3 by 3 by 2 array, typically images will be (num_px_x, num_px_y, num_px_c)
image = np.array([[[ 0.67826139,  0.29380381],
                    [ 0.90714982,  0.52835647],
                    [ 0.4215251 ,  0.45017551]],

                  [[ 0.92814219,  0.96677647],
                    [ 0.85304703,  0.52351845],
                    [ 0.19981397,  0.27417313]],

                  [[ 0.60659855,  0.00533165],
                    [ 0.10820313,  0.49978937],
                    [ 0.34144279,  0.94630077]]])

print ("image2vector(image) = " + str(image2vector(image)))

image2vector(image) = [[0.67826139 0.29380381]
 [0.90714982 0.52835647]
 [0.4215251  0.45017551]
 [0.92814219 0.96677647]
 [0.85304703 0.52351845]
 [0.19981397 0.27417313]
 [0.60659855 0.00533165]
 [0.10820313 0.49978937]
 [0.34144279 0.94630077]]
```

Expected Output:

****image2vector(image)****

```
[[ 0.67826139] [ 0.29380381] [ 0.90714982] [
 0.52835647] [ 0.4215251 ] [ 0.45017551] [
 0.92814219] [ 0.96677647] [ 0.85304703] [
 0.52351845] [ 0.19981397] [ 0.27417313] [
 0.60659855] [ 0.00533165] [ 0.10820313] [
 0.49978937] [ 0.34144279] [ 0.94630077]]
```


1.4 - Broadcasting

Consider a weight matrix of shape (1, 12288) and an image of shape (209, 12288). This means that the input has 209 image samples with each sample described by 12288 pixels.

For one example $x^{(i)}$:

$$z^{(i)} = x^{(i)}w^T + b \quad (1)$$

Now, the shape of $x^{(i)}w^T$ is (209, 1) which means it has 209 rows and each row has 1 learned representation for that image sample. Ideally, the shape of the bias term should now be (209, 1) in order to facilitate the addition of $x^{(i)}w^T$ and b . This is illustrated as follows:

```
In [ ]: w = np.random.rand(1, 12288)
img = np.random.rand(209, 12288)
b = np.random.rand(209, 1)
out = np.dot(img, w.T)
print("Out Shape : " , out.shape)
out = out + b
print("Out Shape (after bias) : " , out.shape)
```

```
Out Shape : (209, 1)
Out Shape (after bias) : (209, 1)
```

However, Numpy has an interesting feature called **Broadcasting**. Subject to certain constraints, the smaller array is “broadcast” across the larger array so that they have compatible shapes. Broadcasting provides a means of vectorizing array operations so that looping occurs in C instead of Python. It does this without making needless copies of data and usually leads to efficient algorithm implementations.

```
In [ ]: w1 = np.random.rand(1, 12288)
img1 = np.random.rand(209, 12288)
b1 = 0
out1 = np.dot(img1, w1.T)
print("Out Shape : " , out1.shape)
out1 = out1 + b1
print("Out Shape (after bias) : " , out1.shape)
```

```
Out Shape : (209, 1)
Out Shape (after bias) : (209, 1)
```

2) Vectorization

In deep learning, you deal with very large datasets. Hence, a non-computationally-optimal function can become a huge bottleneck in your algorithm and can result in a model that takes ages to run. To make sure that your code is computationally efficient, you will use vectorization. For example, try to tell the difference between the following implementations of the dot/outer/elementwise product.

```
In [ ]: import time

x1 = [9, 2, 5, 0, 0, 7, 5, 0, 0, 0, 9, 2, 5, 0, 0]
x2 = [9, 2, 2, 9, 0, 9, 2, 5, 0, 0, 9, 2, 5, 0, 0]

### CLASSIC DOT PRODUCT OF VECTORS IMPLEMENTATION ###
start_time = time.process_time()
dot = 0
for i in range(len(x1)):
    dot += x1[i]*x2[i]
end_time = time.process_time()
print ("dot = " + str(dot) + "\n ----- Computation time = " + str(1000*(e

### CLASSIC OUTER PRODUCT IMPLEMENTATION ###
start_time = time.process_time()
outer = np.zeros((len(x1),len(x2))) # we create a len(x1)*len(x2) matrix
for i in range(len(x1)):
    for j in range(len(x2)):
        outer[i,j] = x1[i]*x2[j]
end_time = time.process_time()
print ("outer = " + str(outer) + "\n ----- Computation time = " + str(100

### CLASSIC ELEMENTWISE IMPLEMENTATION ###
start_time = time.process_time()
mul = np.zeros(len(x1))
for i in range(len(x1)):
    mul[i] = x1[i]*x2[i]
end_time = time.process_time()
print ("elementwise multiplication = " + str(mul) + "\n ----- Computation

### CLASSIC GENERAL DOT PRODUCT IMPLEMENTATION ###
W = np.random.rand(3,len(x1)) # Random 3*len(x1) numpy array
start_time = time.process_time()
gdot = np.zeros(W.shape[0])
for i in range(W.shape[0]):
    for j in range(len(x1)):
        gdot[i] += W[i,j]*x1[j]
end_time = time.process_time()
print ("gdot = " + str(gdot) + "\n ----- Computation time = " + str(1000*
```

```

dot = 278
----- Computation time = 0.1272959999996104ms
outer = [[81. 18. 18. 81.  0. 81. 18. 45.  0.  0. 81. 18. 45.  0.  0.]
 [18.  4.  4. 18.  0. 18.  4. 10.  0.  0. 18.  4. 10.  0.  0.]
 [45. 10. 10. 45.  0. 45. 10. 25.  0.  0. 45. 10. 25.  0.  0.]
 [ 0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.]
 [ 0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.]
 [63. 14. 14. 63.  0. 63. 14. 35.  0.  0. 63. 14. 35.  0.  0.]
 [45. 10. 10. 45.  0. 45. 10. 25.  0.  0. 45. 10. 25.  0.  0.]
 [ 0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.]
 [ 0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.]
 [ 0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.]
 [81. 18. 18. 81.  0. 81. 18. 45.  0.  0. 81. 18. 45.  0.  0.]
 [18.  4.  4. 18.  0. 18.  4. 10.  0.  0. 18.  4. 10.  0.  0.]
 [45. 10. 10. 45.  0. 45. 10. 25.  0.  0. 45. 10. 25.  0.  0.]
 [ 0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.]
 [ 0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.  0.]]
----- Computation time = 0.2543050000003433ms
elementwise multiplication = [81.  4. 10.  0.  0. 63. 10.  0.  0.  0. 81.
 4. 25.  0.  0.]
----- Computation time = 0.15400799999998327ms
gdot = [28.3505377  27.97297548 12.88598387]
----- Computation time = 0.19405499999969322ms

```

```

In [ ]: x1 = [9, 2, 5, 0, 0, 7, 5, 0, 0, 0, 9, 2, 5, 0, 0]
        x2 = [9, 2, 2, 9, 0, 9, 2, 5, 0, 0, 9, 2, 5, 0, 0]

### VECTORIZED DOT PRODUCT OF VECTORS ###
start_time = time.process_time()
dot = np.dot(x1,x2)
end_time = time.process_time()
print ("dot = " + str(dot) + "\n ----- Computation time = " + str(1000*(e

### VECTORIZED OUTER PRODUCT ###
start_time = time.process_time()
outer = np.outer(x1,x2)
end_time = time.process_time()
print ("outer = " + str(outer) + "\n ----- Computation time = " + str(100

### VECTORIZED ELEMENTWISE MULTIPLICATION ###
start_time = time.process_time()
mul = np.multiply(x1,x2)
end_time = time.process_time()
print ("elementwise multiplication = " + str(mul) + "\n ----- Computation

### VECTORIZED GENERAL DOT PRODUCT ###
start_time = time.process_time()
dot = np.dot(W,x1)
end_time = time.process_time()
print ("gdot = " + str(dot) + "\n ----- Computation time = " + str(1000*(

```

```

dot = 278
----- Computation time = 0.13284899999987942ms
outer = [[81 18 18 81 0 81 18 45 0 0 81 18 45 0 0]
[18 4 4 18 0 18 4 10 0 0 18 4 10 0 0]
[45 10 10 45 0 45 10 25 0 0 45 10 25 0 0]
[0 0 0 0 0 0 0 0 0 0 0 0 0 0 0]
[0 0 0 0 0 0 0 0 0 0 0 0 0 0 0]
[63 14 14 63 0 63 14 35 0 0 63 14 35 0 0]
[45 10 10 45 0 45 10 25 0 0 45 10 25 0 0]
[0 0 0 0 0 0 0 0 0 0 0 0 0 0 0]
[0 0 0 0 0 0 0 0 0 0 0 0 0 0 0]
[0 0 0 0 0 0 0 0 0 0 0 0 0 0 0]
[81 18 18 81 0 81 18 45 0 0 81 18 45 0 0]
[18 4 4 18 0 18 4 10 0 0 18 4 10 0 0]
[45 10 10 45 0 45 10 25 0 0 45 10 25 0 0]
[0 0 0 0 0 0 0 0 0 0 0 0 0 0 0]
[0 0 0 0 0 0 0 0 0 0 0 0 0 0 0]]
----- Computation time = 0.11972199999998878ms
elementwise multiplication = [81 4 10 0 0 63 10 0 0 0 81 4 25 0
0]
----- Computation time = 0.09879200000018074ms
gdot = [28.3505377 27.97297548 12.88598387]
----- Computation time = 0.1095549999998724ms

```

As you may have noticed, the vectorized implementation is much cleaner and more efficient. For bigger vectors/matrices, the differences in running time become even bigger.

Note that `np.dot()` performs a matrix-matrix or matrix-vector multiplication. This is different from `np.multiply()` and the `*` operator (which is equivalent to `.*` in Matlab/Octave), which performs an element-wise multiplication.

2.1 Implement the L1 and L2 loss functions

Exercise: Implement the numpy vectorized version of the L1 loss. You may find the function `abs(x)` (absolute value of `x`) useful.

Reminder:

- The loss is used to evaluate the performance of your model. The bigger your loss is, the more different your predictions (\hat{y}) are from the true values (y). In deep learning, you use optimization algorithms like Gradient Descent to train your model and to minimize the cost.
- L1 loss is defined as:

$$L_1(\hat{y}, y) = \sum_{i=0}^m |y^{(i)} - \hat{y}^{(i)}| \quad (6)$$

```
In [ ]: # GRADED FUNCTION: L1
def L1(yhat, y):
    """
    Arguments:
    yhat -- vector of size m (predicted labels)
    y -- vector of size m (true labels)

    Returns:
    loss -- the value of the L1 loss function defined above
    """

    ### START CODE HERE ### (≈ 1 line of code)
    loss = np.sum(abs(yhat - y))
    ### END CODE HERE ###

    return loss
```

```
In [ ]: yhat = np.array([.9, 0.2, 0.1, .4, .9])
y = np.array([1, 0, 0, 1, 1])
print("L1 = " + str(L1(yhat,y)))
```

L1 = 1.1

Expected Output:

****L1**** 1.1

Exercise: Implement the numpy vectorized version of the L2 loss. There are several way of implementing the L2 loss but you may find the function `np.dot()` useful. As a reminder, if $x = [x_1, x_2, \dots, x_n]$, then $\text{np.dot}(x, x) = \sum_{j=0}^n x_j^2$.

- L2 loss is defined as

$$L_2(\hat{y}, y) = \sum_{i=0}^m (y^{(i)} - \hat{y}^{(i)})^2 \quad (7)$$

```
In [ ]: # GRADED FUNCTION: L2
def L2(yhat, y):
    """
    Arguments:
    yhat -- vector of size m (predicted labels)
    y -- vector of size m (true labels)

    Returns:
    loss -- the value of the L2 loss function defined above
    """

    ### START CODE HERE ### (≈ 1 line of code)
    loss = np.sum(np.dot(yhat-y,yhat-y ))
    ### END CODE HERE ###

    return loss
```

```
In [ ]: yhat = np.array([.9, 0.2, 0.1, .4, .9])
y = np.array([1, 0, 0, 1, 1])
print("L2 = " + str(L2(yhat,y)))
```

L2 = 0.43

Expected Output:

****L2**** 0.43