## **SPINACH**

\_\_\_

# Swarmed Parallel Interpreter for Numerical Analysis with Collaborating Hubs

Detailed A-Level Specifications Version 1.1

Yehong Wang 10/19/2009

## 1. Overview

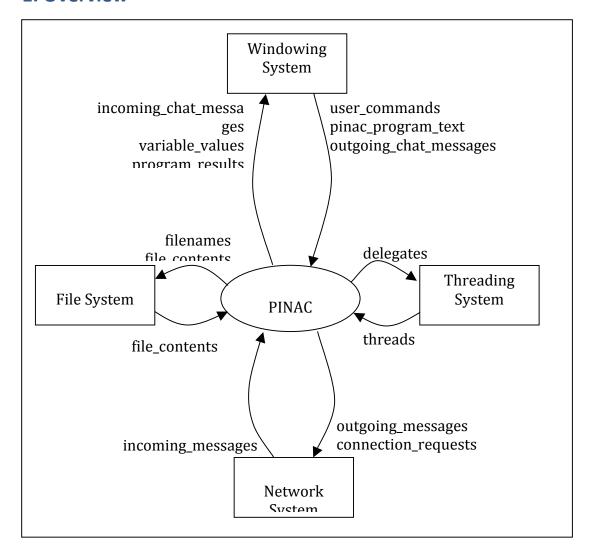


Figure 1 - Top Level Context Diagram

## 2. Referenced Documents

- 1. final\_project\_introduction.ppt September 24, 2009
- 2. final\_project\_statement\_of\_work.doc September 24, 2009
- 3. final\_project\_requirement.doc September 24, 2009
- 4. SPINACH Architectural Concept Document ver 1.1.docx October 19, 2009

## 3. Requirement

#### **3.1. Function Requirement**

#### 3.1.1. Interpreter Front End Team

- 3.1.1.1. **Shall** support interpreting SPINACH input syntax including:
- a. creation of variables (strings and scalars or matrices of either doubles or integers);
  - b. creation of structures;
- c. matrix operations (multiplication, addition, subtraction, transpose); scalar operations (multiplication, addition, subtraction, dot product)
  - d. assignment;
- e. support for non recursive functions that can accept multiple values and return single value;
  - f. if statements:
  - g. tests for equality and inequality;
  - h. for loops;
  - i. parallel for loops;
  - j. parallel for synchronization statements;
  - k. deletion of variables;
- l. display of variables (strings and scalars or matrices of either doubles or integers);
  - m. comments.
- 3.1.1.2. The SPINACH if, for and parallel-for statements **shall** support bodies with an arbitrary number of lines.
- 3.1.1.3. **Shall** check syntax validity of user inputs and report syntax errors.
- 3.1.1.4. **Shall** build up abstract syntax trees containing various elements after processing syntactically correct user inputs.
- 3.1.1.5. **Shall** support interpreting a set of plot commands for plotting team to plot data sets and configure plots.
- 3.1.1.6. **Shall** document SPINACH input language syntax and error messages on web pages. The documentation **shall** have a table of contents.

#### 3.1.2. Interpreter Core Team

3.1.2.1. **Shall** support executing non-parallel SPINACH syntax commands stored in abstract syntax trees including:

- a. creation of variables (strings and scalars or matrices of either doubles or integers);
  - b. creation of structures;
  - c. assignment;
- d. support for non recursive functions that can accept multiple values and return single value;
  - e. if statements;
  - f. tests for equality and inequality;
  - g. for loops;
  - h. deletion of variables;
- i. display of variables (strings and scalars or matrices of either doubles or integers);
  - j. comments.
- 3.1.2.2. **Shall** support executing a set of plot commands for plotting team to plot data sets and configure plots.
- 3.1.2.3. **Shall** break down abstract syntax trees of parallel SPINACH commands including
- a. matrix operations (multiplication, addition, subtraction, transpose); scalar operations (multiplication, addition, subtraction, dot product),
- b. parallel for loops into multiple parallelized abstract syntax trees, then write each parallelized tree into some data stream (byte code?) and save it in the swarm memory.
- 3.1.2.4. **Shall** support parallel-for synchronization statement by breaking parallel-for block into multiple blocks if there are any synchronization statements in the block, so that all threads in the parallel-for arrive at the synchronization statement before continuing.
- 3.1.2.5. **Shall** request swarm to execute parallel SPINACH commands when data stream is stored in the swarm memory. **Shall** assemble the results of the paralleled calculation one swarm computing is done.
- 3.1.2.6. **Shall** use hash map and/or other proper data structures to store variables.
- 3.1.2.7. **Shall** report semantic errors if happens.
- 3.1.2.8. **Shall** document SPINACH input language semantics and error messages on web pages. The documentation **shall** have a table of contents.

#### 3.1.3. Swarm Computing Team

- 3.1.3.1. **Shall** be able to map each computer's username with its IP address and port. **Shall** allow user to join the swarm by supplying the IP address and port of any one of the computers in the swarm. Each computer in the swarm **shall** know the username, IP address, and port of all other computers in the swarm.
- 3.1.3.2. Each program (i.e. a set of source code) **shall** be owned by one user. The owner **shall** be able to grant read or read/write privileges to peers in the swarm. Ownership of a program **shall** be transferrable.
- 3.1.3.3. **Shall** be able to read data stream store by core module in the swarm memory and translate it into abstract syntax trees and other data.
- 3.1.3.4. **Shall** use the master-backup model demonstrated in the Architectural Concept Document to build up the collaborating environment.
- 3.1.3.5. **Shall** keep swarm memory for a particular program synchronized among all peers.
- 3.1.3.6. **Shall** notify the core module once swarm computing is completed and swarm memory is filled with partial results.
- 3.1.3.7. **Shall** have the ability to continue computation of a program when an arbitrary computer in the swarm is disconnected without notice.
- 3.1.3.8. **Shall** allow multiple programs to be run at one time within the swarm. Each program **shall** have its own swarm memory.
- 3.1.3.9. **Shall** support chatting.

#### 3.1.4. User Interface Team

- 3.1.4.1. **Shall** support connecting/disconnecting to/from a swarm.
- 3.1.4.2. **Shall** have a field in the main interface to view swarm member parameters (username, IP address, port, latency).
- 3.1.4.3. **Shall** have a field in the main interface for chatting with all users connected to the swarm.
- 3.1.4.4. **Shall** support creating a new program that has a separate window with text editor, control field, and result field. **Shall** supporting running multiple programs.
- 3.1.4.5. The source code text editor in each program window **shall** support:
  - a. optional line numbers

- b. horizontal and vertical scroll bars
- c. syntax highlighting
- e. an optional line wrap
- f. instant change reflected from all collaborators having write privilege if connected to a swarm (e.g. <a href="http://etherpad.com">http://etherpad.com</a>)
  - g. optional text highlighting with one distinct color per collaborator
- 3.1.4.6. The result field in each program window **shall** support viewing variables, results, and plots during and after execution. **Shall** decide how variables and results are displayed.
- 3.1.4.7. The control field in each program window **shall** support saving plots to a bitmap file, saving and loading program code text into text file.
- 3.1.4.8. The control field in each program window **shall** also support granting read or read/write privileges, and transferring ownership to a peer collaborator by entering username, or IP address and port. The user receiving privilege of a program **shall** see a new program window popped up containing same information of the program as all other peers'.
- 3.1.4.9. Any collaborator with write access permissions for a specific program **shall** be able to modify the program any time it is not running.

## 3.1.5. Plotting Team

- 3.1.5.1. **Shall** define a set of plotting commands that supports:
  - a. plotting single and multiple data sets on one program window
  - b. setting axis and plot titles
  - c. default axis scaling and user customizable axis scaling
  - d. using linear and logarithmic scaling
  - e. 3 dimensional data
- 3.1.5.2. **Shall** decide which data sets can be plotted (matrix, matrix multiplication, etc.). **Shall** notify Interpreter Core Team the data sets accepted by plotting commands so Interpreter Core Team can verify the semantics of plotting commands.
- 3.1.5.3. **Shall** decide how plotting command accepted data sets should be plotted so that user gets a visual representation of program data.
- 3.1.5.4. **Shall** support following modes for 3 dimensional data plotting:
  - a. "terrain" mode
  - b. vector field mode
- c. mode where there is a 2D image but the color of a pixel shows the height of the Z axis

- 3.1.5.5. **Shall** support saving plots to a bitmap file
- 3.1.5.6. **Shall** use OpenGL and/or other technologies for plotting.

#### 3.1.6. Test Team

- 3.1.6.1. **Shall** design the logo for SPINACH
- 3.1.6.2. **Shall** document Qualification Test procedure and results of all SPINACH features. The documentation **shall** have a table of contents
- 3.1.6.3. **Shall** document a getting started tutorial that walks the user through an example application that tests every part of the core SPINACH syntax

#### **3.2 Process Requirements**

These requirements specify the physical structure of delivered code and the environment where it must operate.

#### 3.2.1 Physical Structures

- 3.2.1.1 The SPINA source code **shall** be composed of modules.
- 3.2.1.2 SPINA **shall** be implemented using Visual C# .Net.
- 3.2.1.3 The user interfaces **shall** delegate all operation, not directly associated with providing the user interfaces, to server modules.
- 3.2.1.4 All modules **shall** be provided with manual pages and correct maintenance pages
- 3.2.1.5 Each server module **shall** be provided with a test configuration

#### 3.2.2 Development Environment

3.2.2.1 The SPINA System **shall** build and operate in the ECS clusters, e.g., Link 010, 202, 201, 274 or CST 2-112