

Kubernetes MultiNode cluster on VirtualBox


Table of Contents

VirtualBox setup	1
VM hardware configuration.....	1
Prepare Servers.....	1
Setup network.....	2
Install docker.....	3
Install and configure kubernetes.....	3
General Installation.....	3
Configure Master VM.....	5
Configure Kubernetes Dashboad.....	5
Configuration slave node.....	9
Install Helm.....	9
Install Ingress controller	10

A step by step description of bringing up kubernetes cluster using VirtualBox 6.0 with ubuntu 18.04 server.

VirtualBox setup

Create two VMs k8s-master and k8s-s1 as shown in below diagram.

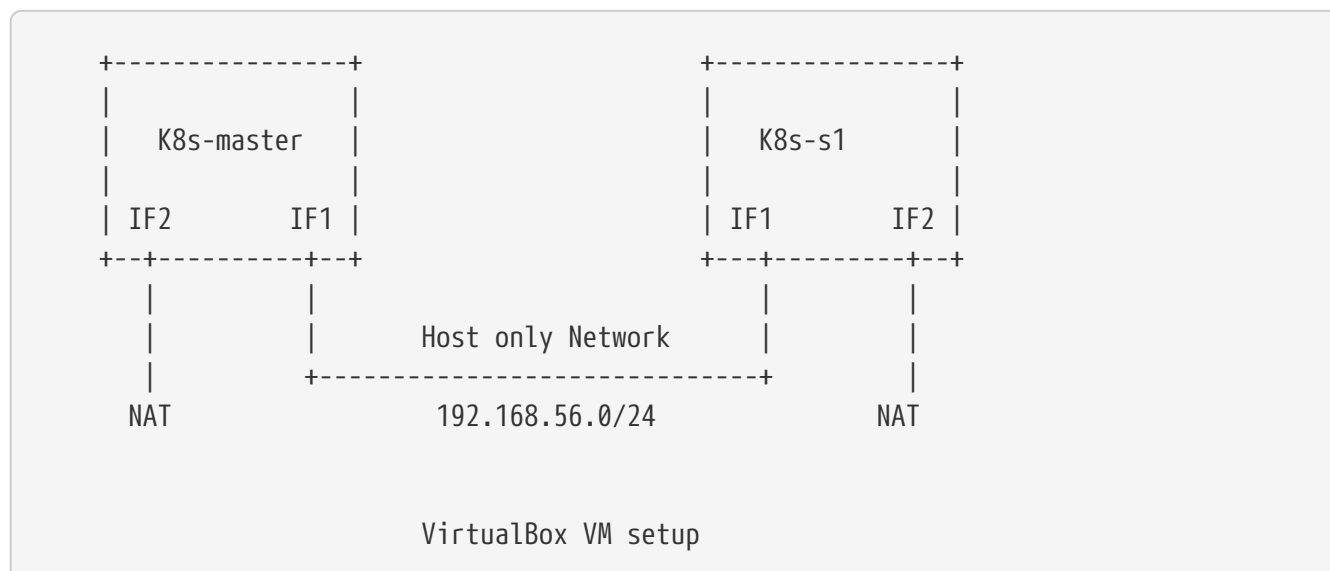

VM hardware configuration.

- Kubernetes master/controller node hardware requirement

Component	Value (min)
Processor	2 core
RAM	4GB
Network Adapter-1	Host only network
Network Adapter-2	NAT

- kubernetes worker/slave node hardware requirement

Component	Value (min)
Processor	1 core
RAM	2GB
Network Adapter-1	Host only network
Network Adapter-2	NAT

Prepare Servers

Execute the below step in both the VMs.

Setup network.

- Shutdown the VMs.
- Modify VM network, with Adapter 1 for Host Only Network and Adapter 2 for NAT.
- Start VM.
- Execute below command and note down the interfaces (generally for Virtual box VMs network interface will start with enp0s).

```
$ sudo ifconfig -a
```

- Setup static network.

Open file `/etc/netplan/50-cloud-init.yaml` and add below configuration.

k8s-master

```
network:
  ethernets:
    enp0s3:
      addresses: [192.168.56.10/24]
      dhcp4: false
    enp0s8:
      addresses: []
      dhcp4: true
  version: 2
```

k8s-s1

```
network:
  ethernets:
    enp0s3:
      addresses: [192.168.56.12/24]
      dhcp4: false
    enp0s8:
      addresses: []
      dhcp4: true
  version: 2
```

- Reboot VMs.
- Update Packages.
 - Update apt sources.

```
$ sudo apt update
```

- Install packages

```
$ sudo apt upgrade
```

Install docker

- Install utility packages

```
$ sudo apt install apt-transport-https ca-certificates curl software-properties-common
```

- Add GPG key

```
$ curl -fsSL https://download.docker.com/linux/ubuntu/gpg | sudo apt-key add -
```

- Add docker repository to apt sources.

```
$ sudo add-apt-repository "deb [arch=amd64] https://download.docker.com/linux/ubuntu bionic stable"
```

- Update apt sources and install docker

```
$ sudo apt update ; sudo apt install docker-ce
```

- Verify docker service is started.

```
$ sudo systemctl status docker
```

Install and configure kubernetes.

General Installation

Execute the below steps on both the VMs.

1. Add Kubernetes source gpg.

```
$ curl -s https://packages.cloud.google.com/apt/doc/apt-key.gpg | sudo apt-key add -
```

2. Next add kubernetes repository

```
$ sudo apt-add-repository "deb http://apt.kubernetes.io/ kubernetes-xenial main"
```



Browse <http://apt.kubernetes.io/> and search for the corresponding ubuntu version, since there was no kubernetes-bionic, installing kubernetes-xenial in my case.

3. Install `kubeadm`

```
$ sudo apt install kubeadm
```

4. Turn off swap

```
$ sudo swapoff -a
```

5. Comment out any line containing swap in `/etc/fstab`



If 4 and 5 steps not followed, kubelet service will not start.

6. Add private ip to kubernetes arguments

While installing you might get error related to port forwarding if you are using private IP which is true in our case. To resolve this issue, Create file `/etc/default/kubelet` and following content in the file.

```
KUBELET_EXTRA_ARGS=--node-ip=192.168.56.10
```

7. Use systemd for cgroups.

Create file `/etc/docker/daemon.json` and add following content.

```
{
  "exec-opts": ["native.cgroupdriver=systemd"],
  "log-driver": "json-file",
  "log-opts": {
    "max-size": "100m"
  },
  "storage-driver": "overlay2"
}
```

8. Reload configuration and restart docker service.

```
sudo systemctl daemon-reload
sudo systemctl restart docker
```

9. Reboot VMs.

Configure Master VM.

1. Initialize kubernetes master node by executing below command.

```
$ sudo kubeadm init --apiserver-advertise-address=192.168.56.10 \
--pod-network-cidr=10.244.0.0/16
```

2. As output of above command shows to execute below command, run below command to enable **kubectl** command. Execute the below command.

```
$ mkdir -p $HOME/.kube
$ sudo cp -i /etc/kubernetes/admin.conf $HOME/.kube/config
$ sudo chown $(id -u):$(id -g) $HOME/.kube/config
```

3. Note down (copy to textpad) the **kubeadm** join command which needs to be executed on slave nodes to join to the cluster, we not run the command now, instead we will execute once dashboard is installed as we need dashboard to be installed on master node.
4. Install pod network.

```
$ kubectl apply -f https://raw.githubusercontent.com/coreos/flannel/master/Documentation/kube-flannel.yml
```

5. Verify all necessary pods are started

```
$ kubectl get pods --all-namespaces
```

output:

NAMESPACE	NAME	READY	STATUS	RESTARTS	AGE
kube-system	coredns-86c58d9df4-c68gd	1/1	Running	0	6m41s
kube-system	coredns-86c58d9df4-q5bht	1/1	Running	0	6m41s
kube-system	etcd-k8s-master	1/1	Running	0	6m6s
kube-system	kube-apiserver-k8s-master	1/1	Running	0	5m59s
kube-system	kube-controller-manager-k8s-master	1/1	Running	0	5m56s
kube-system	kube-flannel-ds-amd64-stb29	1/1	Running	0	49s
kube-system	kube-proxy-882ms	1/1	Running	0	6m41s
kube-system	kube-scheduler-k8s-master	1/1	Running	0	5m54s

Configure Kubernetes Dashboard.

Install Dashboard

1. Deploy dashboard.

```
$ kubectl create -f https://raw.githubusercontent.com/kubernetes/dashboard/master/aio/deploy/recommended/kubernetes-dashboard.yaml
```

2. Wait till dashboard pod is running.

```
$ kubectl get pods --all-namespaces
```

output:

NAMESPACE	NAME	READY	STATUS	RESTARTS	AGE
kube-system	coredns-86c58d9df4-c68gd	1/1	Running	0	11m
kube-system	coredns-86c58d9df4-q5bht	1/1	Running	0	11m
kube-system	etcd-k8s-master	1/1	Running	0	10m
kube-system	kube-apiserver-k8s-master	1/1	Running	0	10m
kube-system	kube-controller-manager-k8s-master	1/1	Running	0	10m
kube-system	kube-flannel-ds-amd64-stb29	1/1	Running	0	5m18s
kube-system	kube-proxy-882ms	1/1	Running	0	11m
kube-system	kube-scheduler-k8s-master	1/1	Running	0	10m
kube-system	kubernetes-dashboard-57df4db6b-5phx2	1/1	Running	0	35s

3. By default dashboard cannot be accessed from outside the VM, if you are using ubuntu desktop you can run below command and access the dashboard using proxy at url <http://localhost:8001/api/v1/namespaces/kube-system/services/https:kubernetes-dashboard:/proxy/>

```
$ kubectl proxy
```

1. However if you want dashboard be accessed from external ip editing kubernetes-dashboard service and changing type from ClusterIP to NodePort.

```
$ kubectl edit service kubernetes-dashboard -n kube-system
```

The file content should something as shown below


```

apiVersion: v1
kind: Service
metadata:
  creationTimestamp: "2019-01-21T18:06:35Z"
  labels:
    k8s-app: kubernetes-dashboard
  name: kubernetes-dashboard
  namespace: kube-system
  resourceVersion: "1885"
  selfLink: /api/v1/namespaces/kube-system/services/kubernetes-dashboard
  uid: 4a2d8f61-1da7-11e9-9d52-080027aba7cb
spec:
  clusterIP: 10.110.253.116
  externalTrafficPolicy: Cluster
  ports:
    - nodePort: 32608
      port: 443
      protocol: TCP
      targetPort: 8443
  selector:
    k8s-app: kubernetes-dashboard
  sessionAffinity: None
  type: ClusterIP ①
status:
  loadBalancer: {}

```

① Replace **ClusterIP** with **NodePort**

4. Execute the below command and note down the port

```
$ kubectl get service --all-namespaces
```

output:

NAMESPACE	NAME	TYPE	CLUSTER-IP	EXTERNAL-IP	PORT(S)	AGE
default	kubernetes	ClusterIP	10.96.0.1	<none>	443/TCP	21m
kube-system	kube-dns	ClusterIP	10.96.0.10	<none>	53/UDP,53/TCP	21m
kube-system	kubernetes-dashboard	NodePort	10.110.253.116	<none>	443:32608/TCP	10m



The dashboard port is **32608** in my case.

5. Now we can access dashboard at URL. <https://192.168.56.10:32608>



Port will be dynamically generated and port should be replaced from step 5.

Create service Account and access dashboard.

1. Create a service account

```
$ kubectl create serviceaccount admin-user -n kube-system
```

Verification : Below command should list the admin-user account

```
$ kubectl get serviceaccount --all-namespaces
```

2. Create Cluster Role binding for the user.

```
$ kubectl create clusterrolebinding admin-user -n kube-system \
  --clusterrole=cluster-admin \
  --serviceaccount=kube-system:admin-user
```

3. Generate the Bearer Token to access Dashboard

```
$ kubectl -n kube-system describe secret $(kubectl -n kube-system get secret | \
    grep admin-user | \
    awk '{print $1}')
```

output:

```
Name: admin-user-token-4nw2z
Namespace: kube-system
Labels: <none>
Annotations: kubernetes.io/service-account.name: admin-user
              kubernetes.io/service-account.uid: a1e3ca50-1dab-11e9-9d52-080027aba7cb

Type: kubernetes.io/service-account-token

Data
====
ca.crt:      1025 bytes
namespace:   11 bytes
token:
eyJhbGciOiJSUzI1NiIsImtpZCI6Ij9.eyJpc3MiOiJrdWJlcm5ldGVzL3NlcnZpY2VhY2NvdW50Iiwia3ViZXJlZXRlcyc5pby9zZXJ2aWNLWYNjb3VudC9uYWw1c3BhY2UiOiJrdWJlLXN5c3RlbnSiIsImt1YmVybW0ZXMuaW8vc2VydmJlZWZjY291bnQvc2VjcmV0Lm5hbWUwIjoiJHJ2aWNLWYNjb3VudC9zZXJ2aWNLWZjY291bnQubmFtZSI6ImFkbWUuLXVzZXIiLCJrdWJlcm5ldGVzLmF1L3NlcnZpY2VhY2NvdW50L3NlcnZpY2UuYWVjb3VudC51aWQioiJhMWUzY2E1MC0xZGF1LTEXZTktOWQ1Mi0wODAwMjdhYmE3Y2IiLCJzdWIiOiJzeXN0ZW06c2VydmJlZWZjY291bnQ6a3ViZS1zeXN0ZW06YWRTaW4tdXNlcj9.YHRkrY1dPsrF1N4LU6gGqCPP1617faeBbHeLJAdWXD3TvvZMYnQdMvZuWtFZjVMxXPdgXDud17eCffDXBg5bRAs1sxd7B37IbXXVULrYFoMR-
```

Copy the token and paste it into token feild in the URL to Dashboard and login to dashboard.

Configuration slave node.

1. Now go to slave node and execute the join command previously saved when you were executing kubeadm on master.

```
$ kubeadm join 192.168.56.10:6443 --token t0j1zi.v5lojsnpjh9r0rbn \
--discovery-token-ca-cert-hash sha256:40b1142d9002003ab5b085776b8b8cba4a41ceafab06429c49eaedc2b2939fa
```



The above command is sample, the values are dynamically generated.

2. Now go back to master and execute the below command, you should be able to see slave node added.

```
$ kubectl get nodes
```

output:

NAME	STATUS	ROLES	AGE	VERSION
k8s-master	Ready	master	56m	v1.13.2
k8s-s1	Ready	<none>	2m49s	v1.13.2

Install Helm

Helm package manager consists of helm client and tiller component which runs as pod on k8s. We will install helm client on our master server itself.

Install helm client.

1. Install helm client using snap on master server using below command.

```
$ sudo snap install helm --classic
```

2. Verify helm client is running by executing command **helm version**, it should give version details for client and for server side should return error until we install tiller.

Install Tiller.

Before installing tiller we need to create RBAC for the tiller pod.

1. Create service account for tiller.

```
kubectl -n kube-system create serviceaccount tiller
```

2. Provide cluster role for the above service account.

```
kubectl create clusterrolebinding tiller \
  --clusterrole cluster-admin \
  --serviceaccount=kube-system:tiller
```

3. Now create tiller using the service account

```
helm init --service-account tiller
```

4. Wait until tiller pod comes up.

```
kubectl get po --all-namespaces --watch
```

5. Once tiller pod is up, run **helm version**, the output provide version details for both client and server.

Install Ingress controller

Optionally if you want to expose Any API/web application install ingress controllers such as NGINX, traefik etc.

Install Traefik Ingress controller.

1. Execute below helm command to install traefik ingress.

```
$ helm install --name traefik-ingress --namespace kube-system --set
dashboard.enabled=true --set rbac.enabled=true stable/traefik
```

Installing NGINX ingress controller.

1. Execute below helm command to install nginx ingress.

```
$ helm install stable/nginx-ingress --name nginx-ingress --set rbac.create=true
```

References

<https://github.com/helm/charts/tree/master/stable/traefik> - traefik

<https://github.com/helm/charts/tree/master/stable/nginx-ingress> - nginx

<https://kubernetes.io/docs/concepts/services-networking/ingress/> - ingress controller concepts