

```
In [1]: import seaborn as sns
titanic = sns.load_dataset("titanic")
```

```
In [2]: titanic
```

```
Out[2]:
```

	survived	pclass	sex	age	sibsp	parch	fare	embarked	class	who	adu
0	0	3	male	22.0	1	0	7.2500	S	Third	man	
1	1	1	female	38.0	1	0	71.2833	C	First	woman	
2	1	3	female	26.0	0	0	7.9250	S	Third	woman	
3	1	1	female	35.0	1	0	53.1000	S	First	woman	
4	0	3	male	35.0	0	0	8.0500	S	Third	man	
...	...	...	...	...	...	...	...	...	...	...	...
886	0	2	male	27.0	0	0	13.0000	S	Second	man	
887	1	1	female	19.0	0	0	30.0000	S	First	woman	
888	0	3	female	NaN	1	2	23.4500	S	Third	woman	
889	1	1	male	26.0	0	0	30.0000	C	First	man	
890	0	3	male	32.0	0	0	7.7500	Q	Third	man	

891 rows × 15 columns

```
In [3]: titanic.head(10)
```

```
Out[3]:
```

	survived	pclass	sex	age	sibsp	parch	fare	embarked	class	who	adult_
0	0	3	male	22.0	1	0	7.2500	S	Third	man	
1	1	1	female	38.0	1	0	71.2833	C	First	woman	
2	1	3	female	26.0	0	0	7.9250	S	Third	woman	
3	1	1	female	35.0	1	0	53.1000	S	First	woman	
4	0	3	male	35.0	0	0	8.0500	S	Third	man	
5	0	3	male	NaN	0	0	8.4583	Q	Third	man	
6	0	1	male	54.0	0	0	51.8625	S	First	man	
7	0	3	male	2.0	3	1	21.0750	S	Third	child	
8	1	3	female	27.0	0	2	11.1333	S	Third	woman	
9	1	2	female	14.0	1	0	30.0708	C	Second	child	

In [4]: titanic.info

```
Out[4]: <bound method DataFrame.info of
0      sibsp  parch      fare embarked  class  \
0          0        3    male   22.0      1    0    7.2500      S
Third
1          1        1    female  38.0      1    0   71.2833      C
First
2          1        3    female  26.0      0    0    7.9250      S
Third
3          1        1    female  35.0      1    0   53.1000      S
First
4          0        3    male   35.0      0    0    8.0500      S
Third
..          ...      ...      ...      ...      ...      ...      ...
886         0        2    male   27.0      0    0   13.0000      S
Second
887         1        1    female  19.0      0    0   30.0000      S
First
888         0        3    female   NaN      1    2   23.4500      S
Third
889         1        1    male   26.0      0    0   30.0000      C
First
890         0        3    male   32.0      0    0    7.7500      Q
Third

      who  adult_male  deck  embark_town  alive  alone
0     man         True  NaN  Southampton    no  False
1  woman        False    C    Cherbourg   yes  False
2  woman        False  NaN  Southampton   yes  True
3  woman        False    C    Southampton   yes  False
4     man         True  NaN  Southampton    no  True
..     ...         ...  ...      ...      ...      ...
886   man         True  NaN  Southampton    no  True
887 woman        False    B  Southampton   yes  True
888 woman        False  NaN  Southampton    no  False
889   man         True    C    Cherbourg   yes  True
890   man         True  NaN  Queenstown    no  True
```

[891 rows x 15 columns]>

In [5]: titanic.describe()

```
Out[5]:
```

	survived	pclass	age	sibsp	parch	fare
count	891.000000	891.000000	714.000000	891.000000	891.000000	891.000000
mean	0.383838	2.308642	29.699118	0.523008	0.381594	32.204208
std	0.486592	0.836071	14.526497	1.102743	0.806057	49.693429
min	0.000000	1.000000	0.420000	0.000000	0.000000	0.000000
25%	0.000000	2.000000	20.125000	0.000000	0.000000	7.910400
50%	0.000000	3.000000	28.000000	0.000000	0.000000	14.454200
75%	1.000000	3.000000	38.000000	1.000000	0.000000	31.000000
max	1.000000	3.000000	80.000000	8.000000	6.000000	512.329200

```
In [6]: titanic.loc[:,["survived","alive"]]
```


```
Out[6]:
```

	survived	alive
0	0	no
1	1	yes
2	1	yes
3	1	yes
4	0	no
...	...	...
886	0	no
887	1	yes
888	0	no
889	1	yes
890	0	no

891 rows × 2 columns


```
In [7]: sns.boxplot(x="sex",y="age",data=titanic)
```

```
Out[7]: <AxesSubplot:xlabel='sex', ylabel='age'>
```

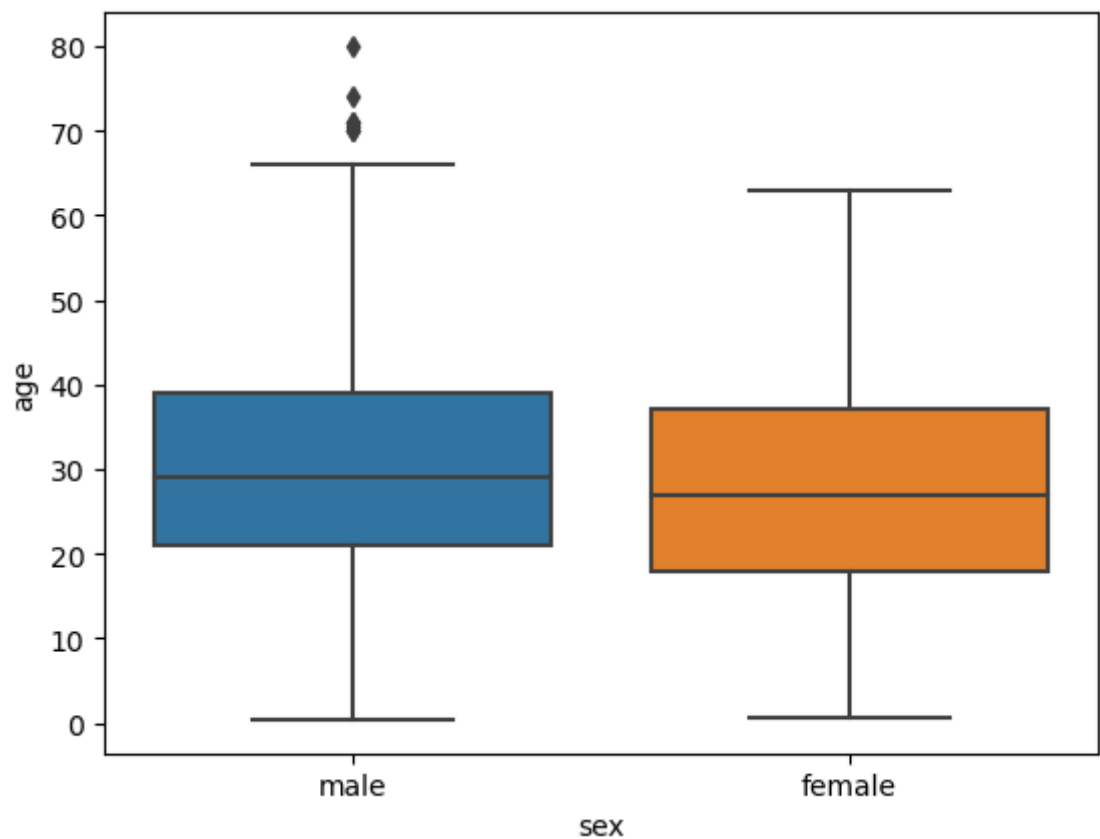

```
In [8]: sns.boxplot(x="sex",y="age",data=titanic,hue="survived")
```

```
Out[8]: <AxesSubplot:xlabel='sex', ylabel='age'>
```

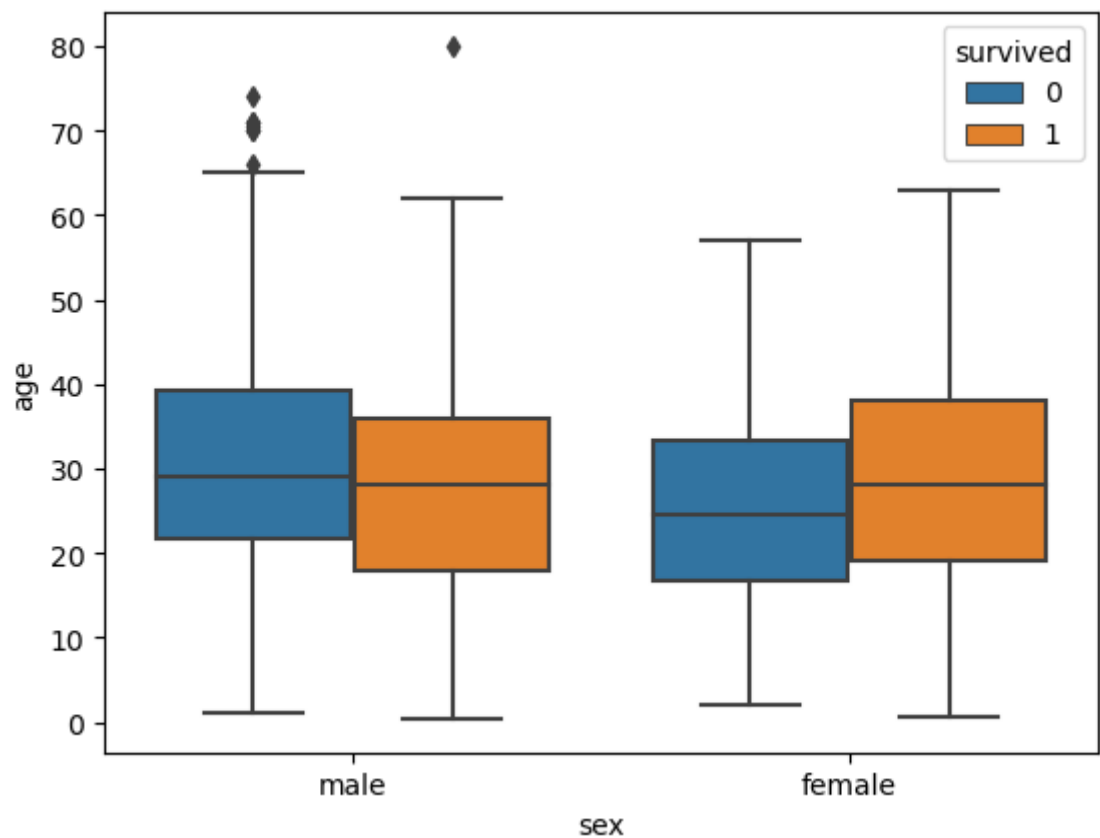

```
In [ ]:
```