


Write a program to demonstrate the use of JSP action tags.


Index.jsp

```
<%@ page language="java" contentType="text/html;  
charset=ISO-8859-1"  
pageEncoding="ISO-8859-1"%>  
Main file  
<jsp:include page="file1.jsp"></jsp:include>  
<jsp:forward page="file2.jsp"></jsp:forward>
```

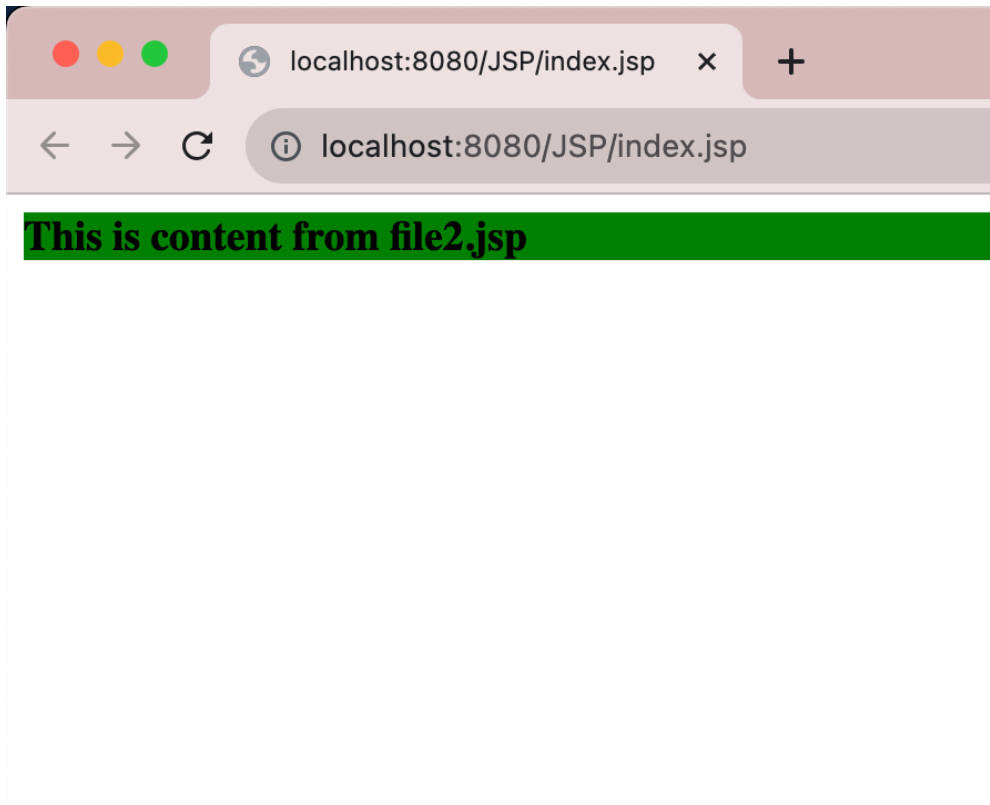

File1.jsp


```
<%@ page language="java" contentType="text/html;  
charset=ISO-8859-1"  
pageEncoding="ISO-8859-1"%>  
<h3 style="background:yellow"> This is content from file1.jsp</h3>
```

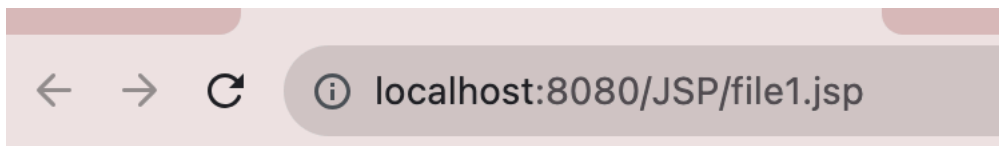

This is content from file1.jsp

File2.jsp

```
<%@ page language="java" contentType="text/html;  
charset=ISO-8859-1"  
pageEncoding="ISO-8859-1"%>  
<h3 style="background:green"> This is content from file2.jsp</h3>
```

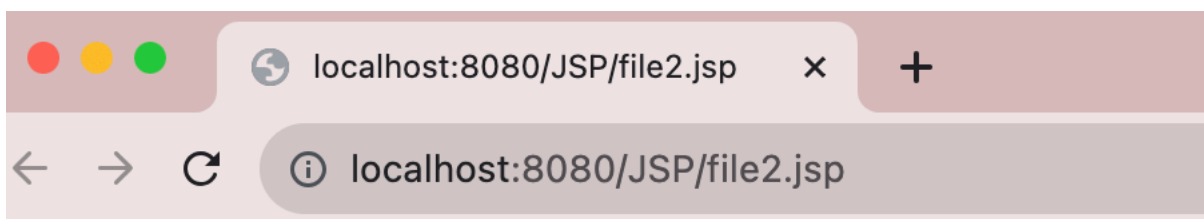

This is content from file2.jsp

