**Web Programming Experiment File (SEC035)**

**Bachelor of Technology**

**in**

**Computer Science and Engineering**

*Submitted by*


# Krishna (2401010066)

B.Tech CSE(Core)–4thSemester

Section: A


Submitted To:

# MS. Rishika Mehta


**School of Engineering & Technology**
**K.R. MANGALAM UNIVERSITY**
**Sohna, Haryana,122103, India feb-2026**


## Experiment:4

**Task**

**Task1: Project Setup & Introduction**

- Create a project folder named dynamic_todo_list
- Inside the folder, create: ○ index.html ○ style.css ○ script.js
- Add header comments in HTML(project title, name, date)

- Display a short description of the to-do list application

Deliverable:
Project folder with HTML, CSS, and JS files linked correctly.

---

**Task2: To-Do List Interface(HTML)**

- Create an input field for entering tasks
- Add an “AddTask” button
- Display tasks in a list format(<ul>or<ol>)

Deliverable:
Basic to-do list layout created using HTML.

---

**Task3: Styling the To-Do List(CSS)**

- Apply CSS for:
    - Input box and buttons
    - Task list alignment
    - Visual separation of tasks
- Ensure the interface is clean and readable

Deliverable: style.css file with neat and consistent styling.

---

**Task4: Add & Display Tasks (JavaScript)**

- Capture user input using JavaScript
- Add new tasks dynamically to the list
- Prevent empty tasks from being added

Deliverable:
Functionality to add and display tasks dynamically.

---

**Task5: Edit & Delete Tasks**

- Add “Edit” and “Delete” buttons for each task

- Allow users to modify task text
- Remove tasks from the list dynamically

Deliverable:
Fully functional edit and delete features.

---

**Task6(Bonus): Task Completion Status**

- Add a checkbox or toggle for task completion
- Visually indicate completed tasks (e.g., strikethrough)
- Optional: Count completed vs pending tasks

Deliverable:
Enhanced to-do list with task completion tracking.

**HTML**

Index.html

```
 <!DOCTYPE html>

<html lang="en">

<head>

<meta charset="UTF-8">

<title>Krishna's Task Manager</title>

<link rel="stylesheet" href="style.css">

</head>


<body>


<header>

  <h1>Krishna's To-Do List</h1>

  <p>Manage your daily tasks efficiently</p>

</header>


<section class="todo-container">


  <div class="input-section">

    <input type="text" id="taskInput" placeholder="Enter a task Krishna...">
```

```
    <button id="addTaskBtn">Add Task</button>
  </div>

  <ul id="taskList"></ul>

  <div class="task-count">
    <p id="countText">Krishna's Tasks: 0</p>
  </div>

</section>

<script src="script.js"></script>

</body>
</html>
```

## CSS

### style.css

```
body {
  margin: 0;
  font-family: Arial, sans-serif;
  background-color: #f1f5f9;
  text-align: center;
}

/* HEADER */
header {
  background-color: #1e293b;
  color: white;
  padding: 25px;
}

/* CONTAINER */
```

```
.todo-container {
  background: white;
  width: 60%;
  margin: 40px auto;
  padding: 25px;
  border-radius: 10px;
}

/* INPUT */
input {
  padding: 10px;
  width: 60%;
  border: 1px solid #cbd5e1;
  border-radius: 6px;
}

button {
  padding: 10px 15px;
  margin-left: 10px;
  background: #2563eb;
  color: white;
  border: none;
  border-radius: 6px;
  cursor: pointer;
}

button:hover {
  background: #1e40af;
}

/* TASK */
ul {
  list-style: none;
```

```
  padding: 0;
}

li {
  background: #e2e8f0;
  margin: 10px 0;
  padding: 10px;
  border-radius: 6px;
  display: flex;
  justify-content: space-between;
}

.task-text {
  flex: 1;
  text-align: left;
}

.completed {
  text-decoration: line-through;
  color: gray;
}

.task-buttons button {
  margin-left: 5px;
  background: #64748b;
}

/* COUNT */
.task-count {
  margin-top: 15px;
  font-weight: bold;
}
```

# JAVASCRIPT

## script.js

```
const input = document.getElementById("taskInput");
const addBtn = document.getElementById("addTaskBtn");
const list = document.getElementById("taskList");
const countText = document.getElementById("countText");

let total = 0;

function updateCount() {
  countText.innerText = "Krishna's Tasks: " + total;
}

function createTask(text) {
  const li = document.createElement("li");

  const span = document.createElement("span");
  span.className = "task-text";
  span.innerText = text;

  const btns = document.createElement("div");
  btns.className = "task-buttons";

  // COMPLETE
  const done = document.createElement("button");
  done.innerText = "✓";
  done.onclick = () => {
    span.classList.toggle("completed");
  };

  // DELETE
  const del = document.createElement("button");
  del.innerText = "✕";
  del.onclick = () => {
    list.removeChild(li);
    total--;
    updateCount();
  };

  btns.appendChild(done);
  btns.appendChild(del);

  li.appendChild(span);
  li.appendChild(btns);

  list.appendChild(li);

  total++;
```

```
  updateCount();
}

addBtn.onclick = () => {
  let text = input.value.trim();

  if (text === "") {
    alert("Krishna, enter a valid task!");
    return;
  }

  createTask(text);
  input.value = "";
};

input.addEventListener("keypress", (e) => {
  if (e.key === "Enter") addBtn.click();
});

updateCount();
```
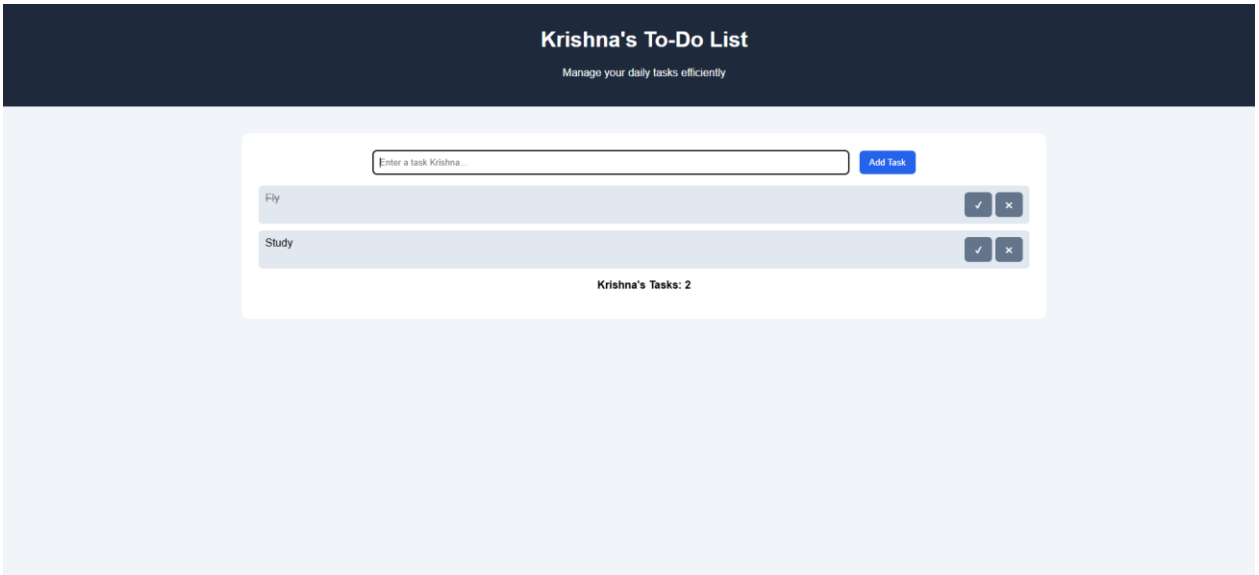
## Output: