

React

Windows – cmd - vscode

Primera aplicación

```
[kralos]
[D:\03_Code\React]
> node -v
v26.0.0
[kralos]
[D:\03_Code\React]
> npm -v
11.12.1
[kralos]
[D:\03_Code\React]
> npm create vite@latest mi-primer-react
Need to install the following packages:
create-vite@9.0.6
Ok to proceed? (y)

> npx
> create-vite mi-primer-react

◇ Select a framework:
  React

◇ Select a variant:
  JavaScript

◇ Install with npm and start now?
  Yes

◇ Scaffolding project in D:\03_Code\React\mi-primer-react...

◇ Installing dependencies with npm...

added 136 packages, and audited 137 packages in 32s

31 packages are looking for funding
  run `npm fund` for details

found 0 vulnerabilities
```


Primera aplicación

```
found 0 vulnerabilities
|
◇ Starting dev server...
> mi-primer-react@0.0.0 dev
> vite


VITE v8.0.11 ready in 2745 ms

→ Local:   http://localhost:5173/
→ Network: use --host to expose
→ press h + enter to show help
6:54:01 PM [vite] (client) [optimizer] bundling dependencies...
|
```

Primera aplicación

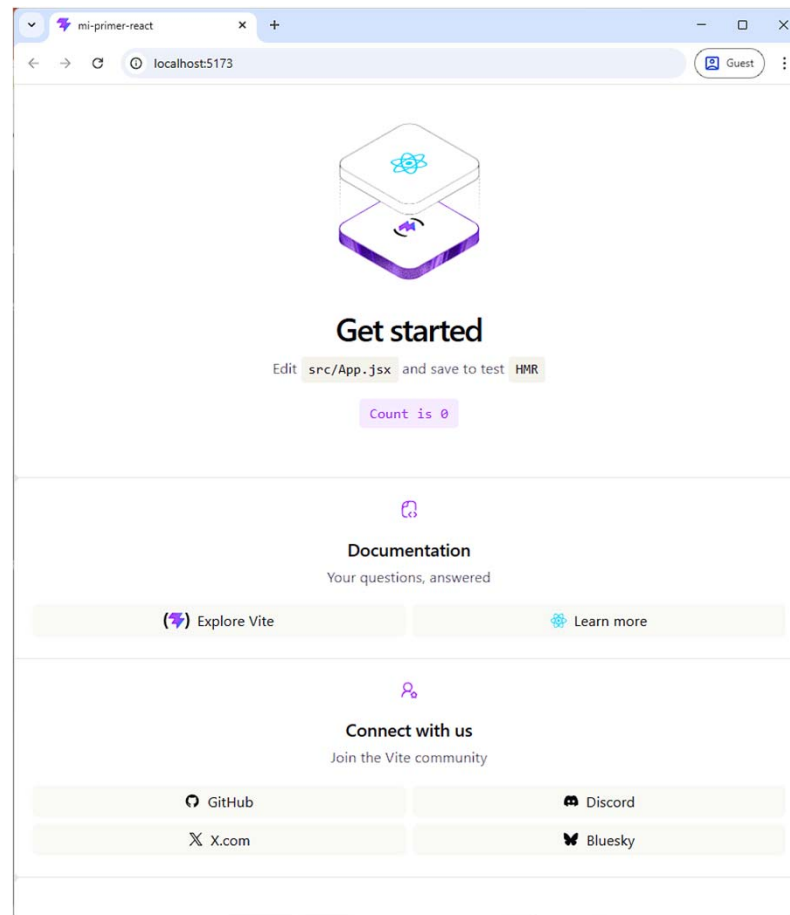

Primera aplicación

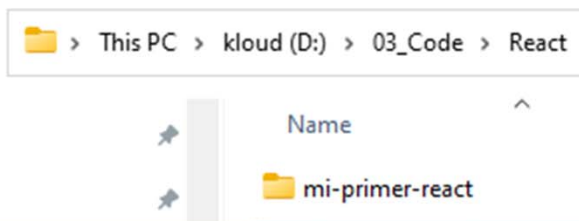

The screenshot shows the VS Code editor with the following code:

```
EXPLORER
MI-PRIMER-REACT
  node_modules
  public
  src
    assets
      App.css
      App.jsx
      index.css
      main.jsx
    .gitignore
    eslint.config.js
    index.html
    package-lock.json
    package.json
    README.md
    vite.config.js

src > main.jsx
1 import { StrictMode } from 'react'
2 import { createRoot } from 'react-dom/client'
3 import './index.css'
4 import App from './App.jsx'
5
6 createRoot(document.getElementById('root')).render(
7   <StrictMode>
8     <App />
9   </StrictMode>,
10 )

src > App.jsx > App
1 import { useState } from 'react'
2 import reactLogo from './assets/react.svg'
3 import viteLogo from './assets/vite.svg'
4 import heroImg from './assets/hero.png'
5 import './App.css'
6
7 function App() {
8   const [count, setCount] = useState(0)
9
10  return (
11    <>
12      <section id="center">
13        <div className="hero">
14          <img src={heroImg} className="base" width="170" height="179" alt="" />
15          <img src={reactLogo} className="framework" alt="React logo" />
16          <img src={viteLogo} className="vite" alt="Vite logo" />
17        </div>
18        <div>
19          <h1>Get started</h1>
20          <p>
21            Edit <code>src/App.jsx</code> and save to test <code>HMR</code>
22          </p>
23        </div>
24        <button
25          type="button"
26          className="counter"
27          onClick={() => setCount((count) => count + 1)}
28        >
29          Count is {count}
30        </button>
31      </section>
32    </>
33  )
34 }
```

Primera aplicación

Archivos importantes:


main.jsx

Es el punto de entrada. Aquí React se monta en el DOM.


App.jsx

Es tu primer componente.

Primera aplicación

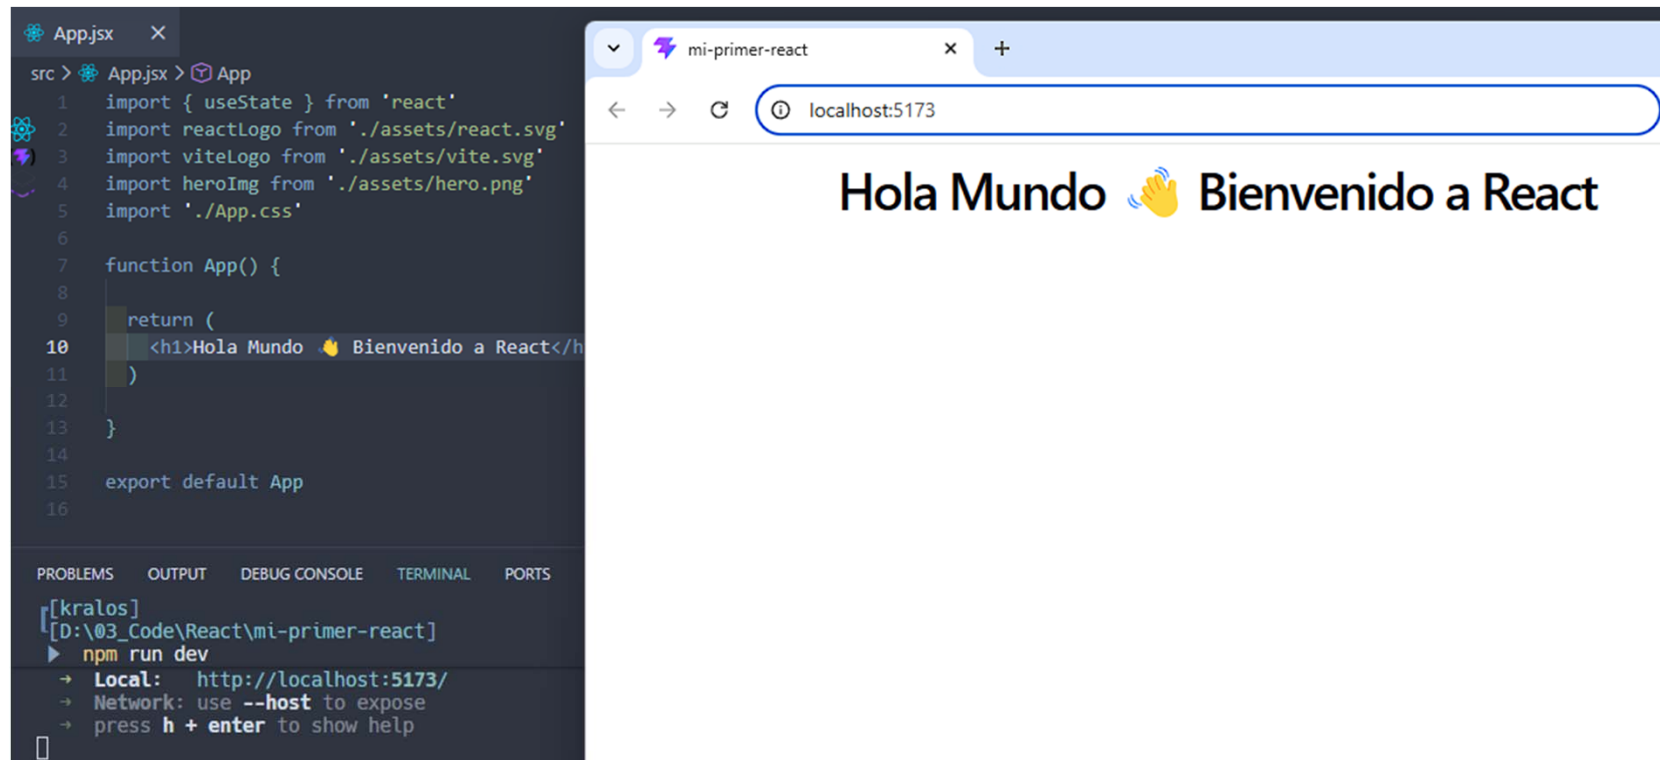

Segunda aplicación

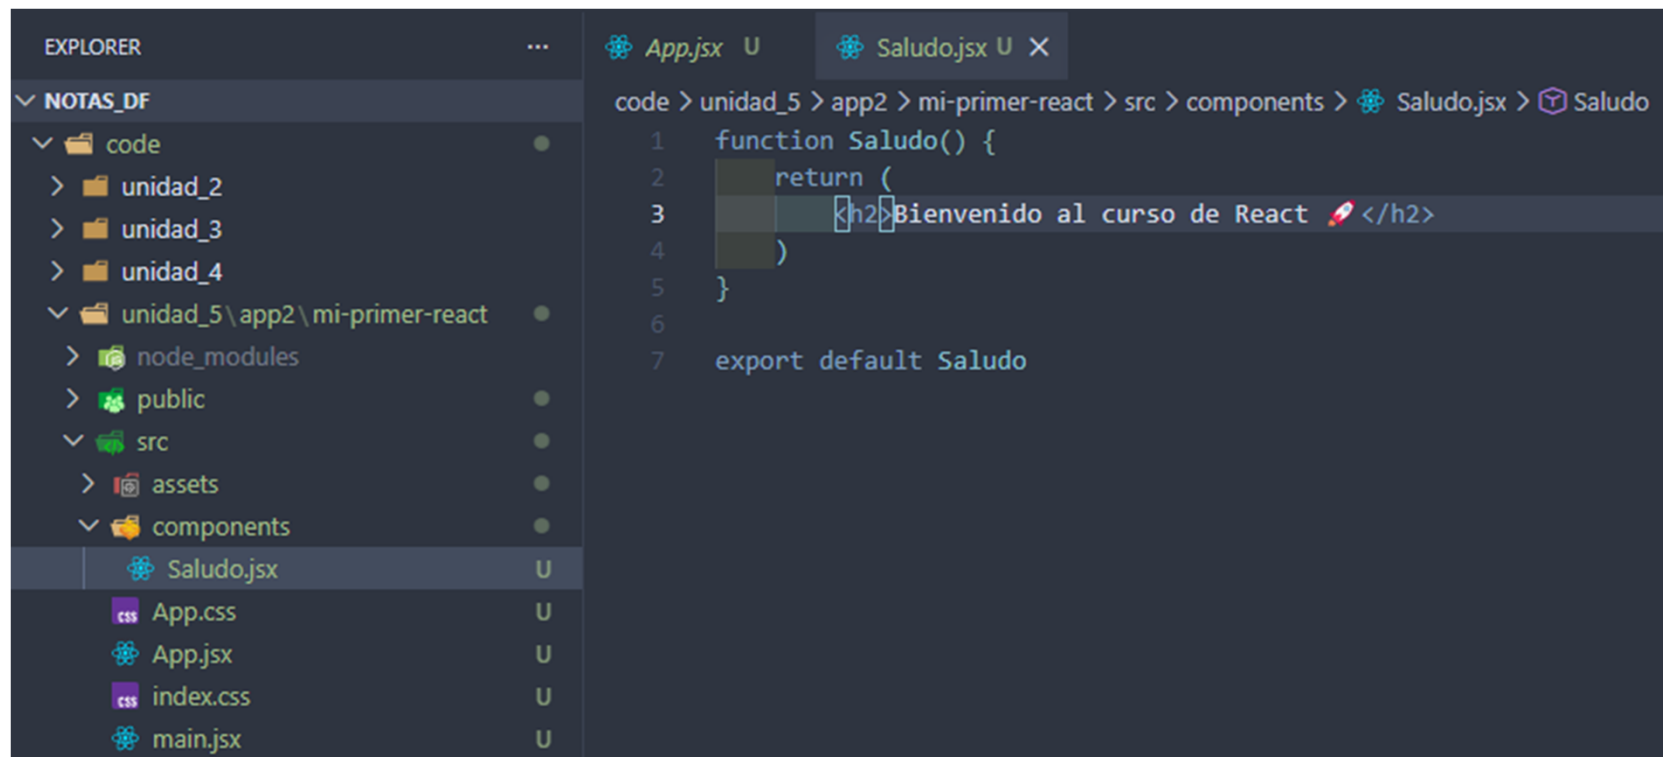


The screenshot shows the Visual Studio Code interface. On the left, the Explorer sidebar displays a file tree for a project named 'NOTAS_DF'. The tree structure is as follows:

- NOTAS_DF
 - code
 - unidad_2
 - unidad_3
 - unidad_4
 - unidad_5\app2\mi-primer-react
 - node_modules
 - public
 - src
 - assets
 - components
 - Saludo.jsx (selected)
 - App.css
 - App.jsx
 - index.css
 - main.jsx

On the right, the editor shows the code for 'Saludo.jsx'. The breadcrumb navigation at the top indicates the path: 'code > unidad_5 > app2 > mi-primer-react > src > components > Saludo.jsx > Saludo'. The code content is:


```
1 function Saludo() {  
2   return (  
3     <h2>Bienvenido al curso de React </h2>  
4   )  
5 }  
6  
7 export default Saludo
```

Segunda aplicación

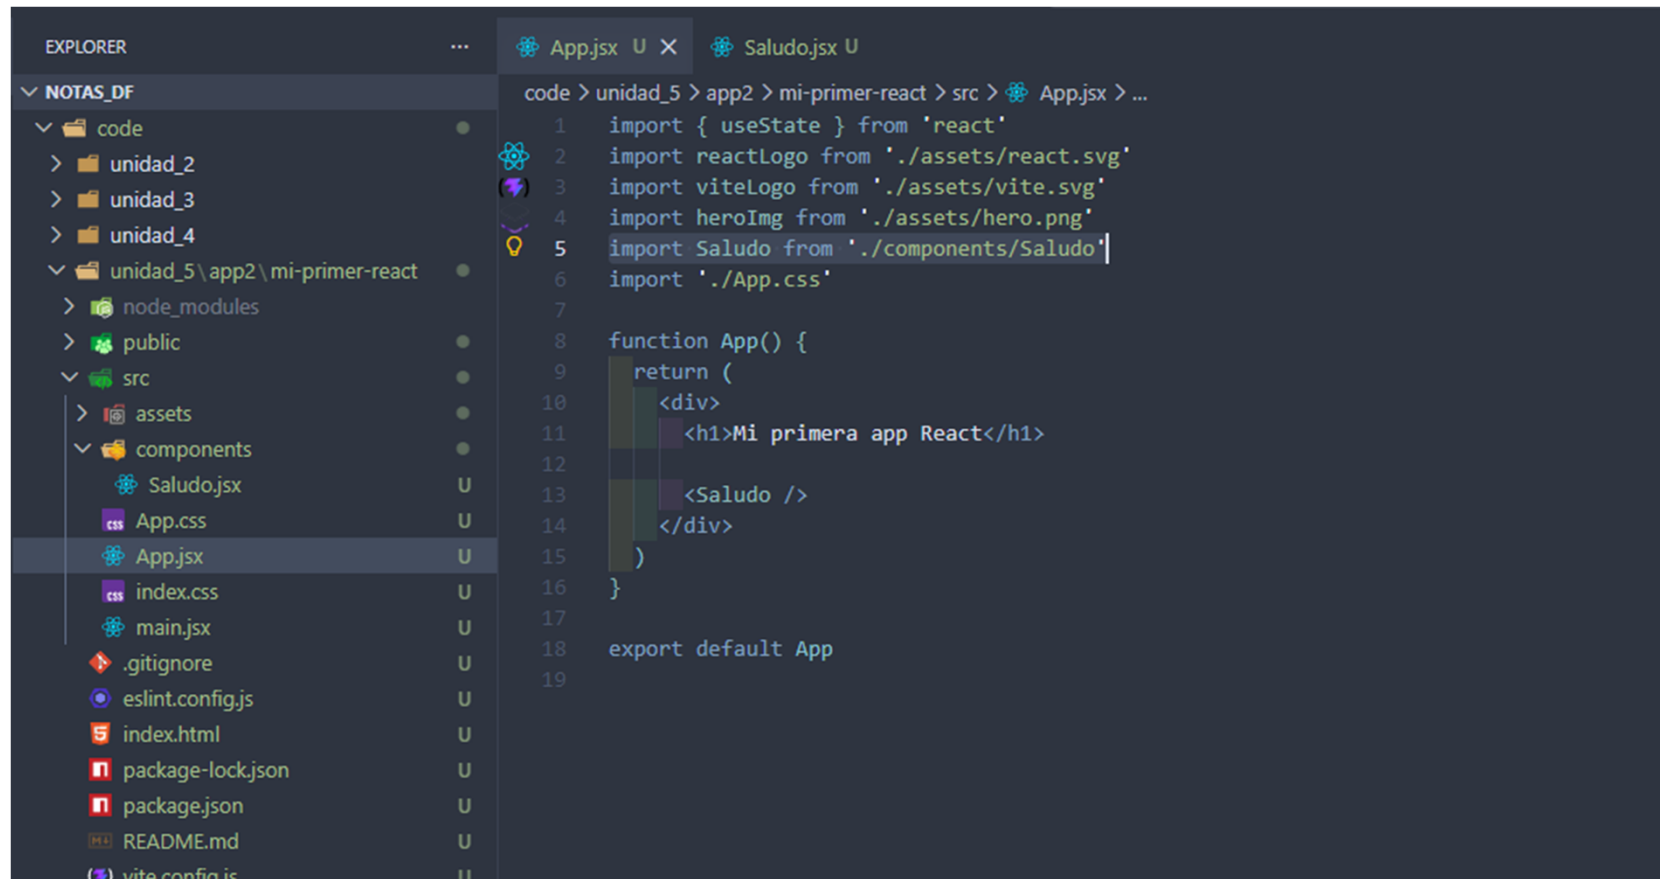

```
code > unidad_5 > app2 > mi-primer-react > src > App.jsx > ...
1  import { useState } from 'react'
2  import reactLogo from './assets/react.svg'
3  import viteLogo from './assets/vite.svg'
4  import heroImg from './assets/hero.png'
5  import Saludo from './components/Saludo'
6  import './App.css'
7
8  function App() {
9    return (
10     <div>
11       <h1>Mi primera app React</h1>
12
13       <Saludo />
14     </div>
15   )
16 }
17
18 export default App
19
```

Segunda aplicación

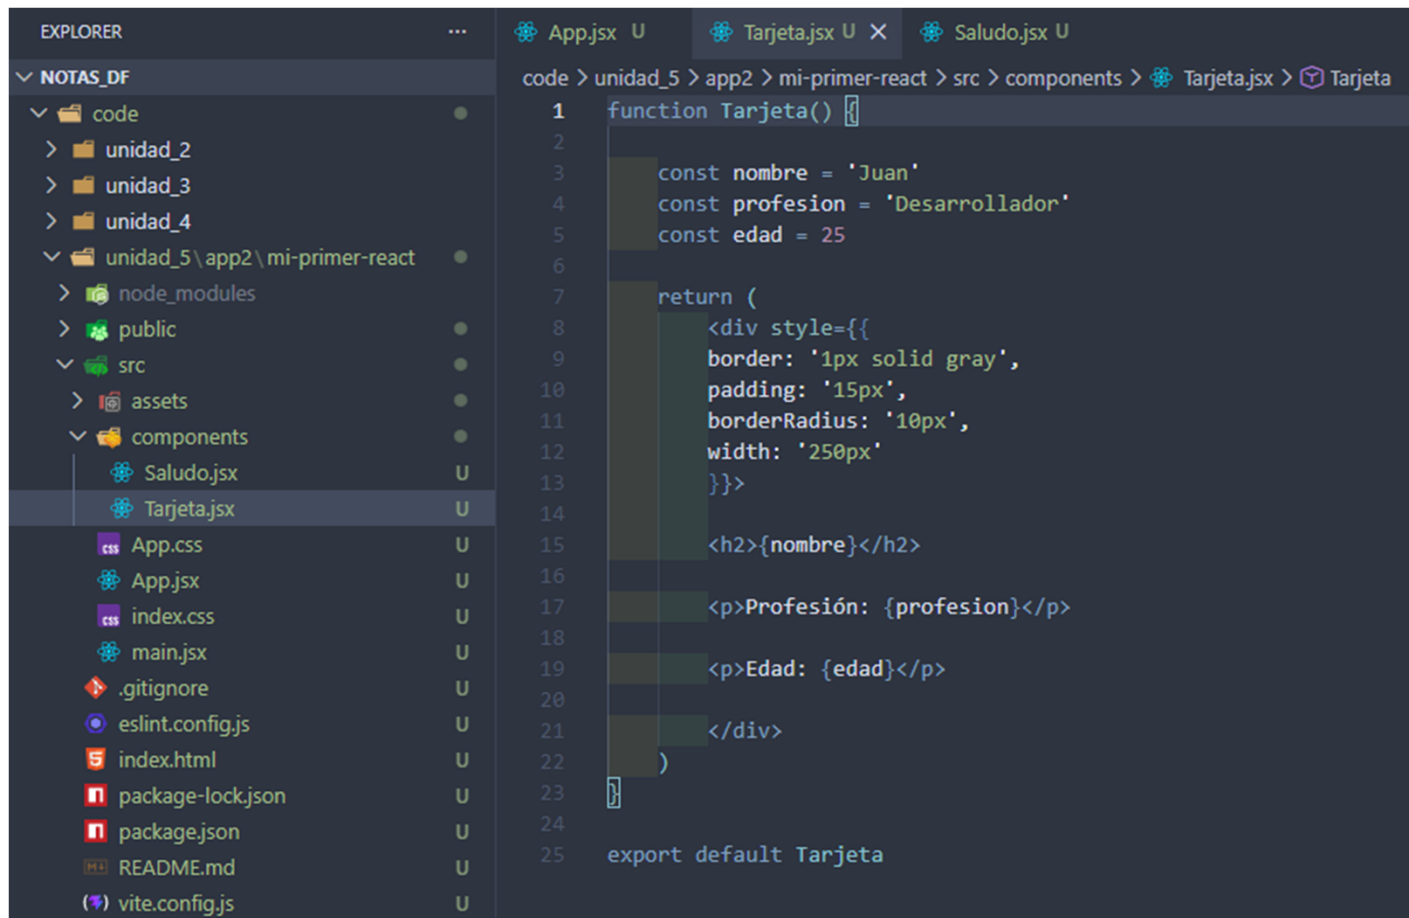


```
EXPLOSER
NOTAS_DF
├── code
│   ├── unidad_2
│   ├── unidad_3
│   ├── unidad_4
│   └── unidad_5\app2\mi-primer-react
│       ├── node_modules
│       ├── public
│       └── src
│           ├── assets
│           └── components
│               ├── Saludo.jsx
│               └── Tarjeta.jsx
├── App.css
├── App.jsx
├── index.css
├── main.jsx
├── .gitignore
├── eslint.config.js
├── index.html
├── package-lock.json
├── package.json
├── README.md
└── vite.config.js

code > unidad_5 > app2 > mi-primer-react > src > components > Tarjeta.jsx > Tarjeta

1 function Tarjeta() {
2
3     const nombre = 'Juan'
4     const profesion = 'Desarrollador'
5     const edad = 25
6
7     return (
8         <div style={{
9             border: '1px solid gray',
10            padding: '15px',
11            borderRadius: '10px',
12            width: '250px'
13        }}>
14
15            <h2>{nombre}</h2>
16
17            <p>Profesión: {profesion}</p>
18
19            <p>Edad: {edad}</p>
20
21        </div>
22    )
23
24    export default Tarjeta
```

Segunda aplicación

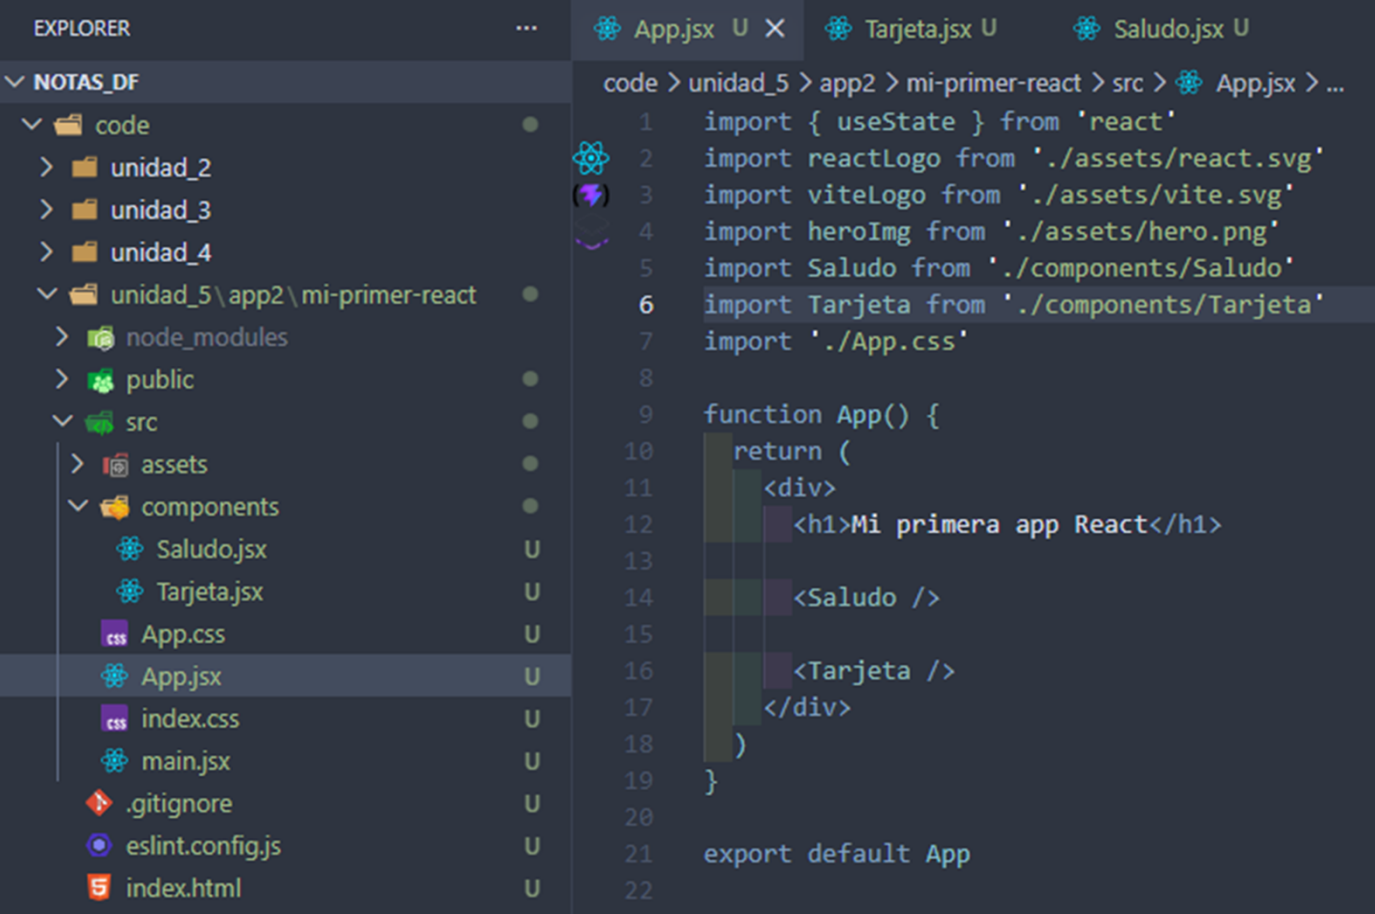

The image shows a screenshot of the Visual Studio Code editor. On the left is the Explorer sidebar showing a project structure. The project is named 'NOTAS_DF' and contains several folders: 'code', 'unidad_2', 'unidad_3', 'unidad_4', and 'unidad_5'. The 'unidad_5' folder is expanded, showing subfolders 'app2' and 'mi-primer-react'. The 'mi-primer-react' folder is further expanded, showing files like 'node_modules', 'public', 'src', 'assets', 'components', 'App.css', 'App.jsx', 'index.css', 'main.jsx', '.gitignore', 'eslint.config.js', and 'index.html'. The 'App.jsx' file is selected and highlighted. On the right is the code editor, showing the content of 'App.jsx'. The code imports 'useState' from 'react', and various SVG and PNG assets from the 'assets' folder. It also imports 'Saludo' and 'Tarjeta' components from the 'components' folder, and 'App.css' from the root. The code defines a function 'App()' that returns a JSX element containing a 'div' with a 'h1' tag, a 'Saludo' component, and a 'Tarjeta' component. The 'App' function is exported as the default export.

```
code > unidad_5 > app2 > mi-primer-react > src > App.jsx > ...
1  import { useState } from 'react'
2  import reactLogo from './assets/react.svg'
3  import viteLogo from './assets/vite.svg'
4  import heroImg from './assets/hero.png'
5  import Saludo from './components/Saludo'
6  import Tarjeta from './components/Tarjeta'
7  import './App.css'
8
9  function App() {
10     return (
11       <div>
12         <h1>Mi primera app React</h1>
13
14         <Saludo />
15
16         <Tarjeta />
17       </div>
18     )
19   }
20
21   export default App
22
```