

Laravel


Framework PHP

Laravel

- Es un marco de desarrollo utilizado para crear sitios y aplicaciones web. El creador de Laravel, Taylor Otwell, lanzó su versión Beta el 9 de junio de 2011.
- Laravel 10 = publicado en febrero de 2023.
- El lanzamiento de Laravel 11 está previsto para febrero de 2024.

Laravel

- En la actualidad, Laravel está alojado en GitHub, donde cuenta con 65.900 usuarios y ha sido descargado 144 millones de veces. Tiene licencia MIT.
- Laravel utiliza PHP con la arquitectura MVC.

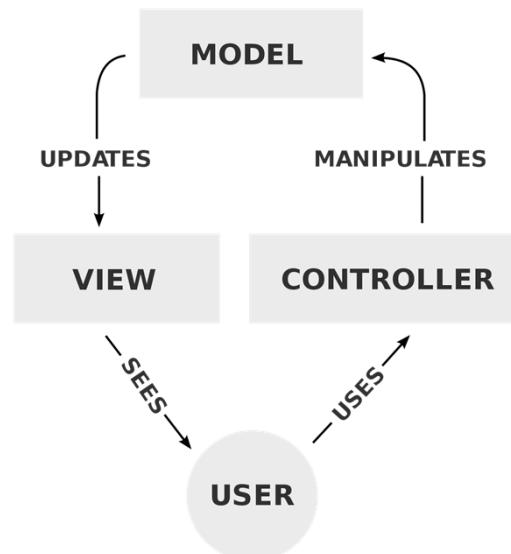


Características de Laravel

- Sistema completo de autenticación
- Mapeo objeto-relacional (ORM)
- Biblioteca de módulos
- Interfaz de línea de comandos (CLI) con comandos preconstruidos
- Pruebas automáticas
- Entorno de desarrollo virtual

Tu primer proyecto Laravel

composer create-project laravel/laravel .

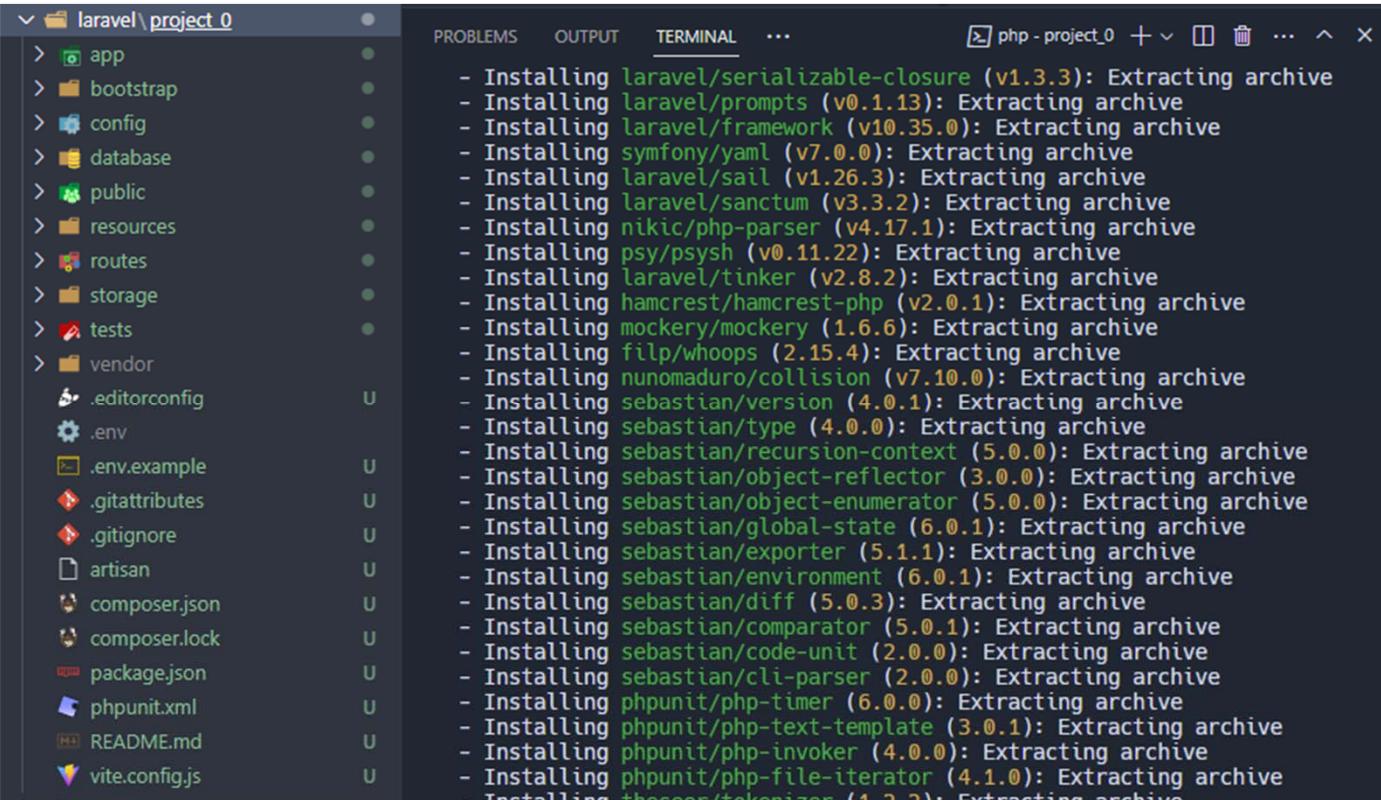


The screenshot shows a terminal window with the title "php - project_0". The left side displays the file structure of a newly created Laravel project named "project_0". The right side shows the output of the Composer command, which lists the installation of various dependencies:

```
- Installing laravel/serializable-closure (v1.3.3): Extracting archive
- Installing laravel/prompts (v0.1.13): Extracting archive
- Installing laravel/framework (v10.35.0): Extracting archive
- Installing symfony/yaml (v7.0.0): Extracting archive
- Installing laravel/sail (v1.26.3): Extracting archive
- Installing laravel/sanctum (v3.3.2): Extracting archive
- Installing nikic/php-parser (v4.17.1): Extracting archive
- Installing psy/psysh (v0.11.22): Extracting archive
- Installing laravel/tinker (v2.8.2): Extracting archive
- Installing hamcrest/hamcrest-php (v2.0.1): Extracting archive
- Installing mockery/mockery (1.6.6): Extracting archive
- Installing filp/whoops (2.15.4): Extracting archive
- Installing nunomaduro/collision (v7.10.0): Extracting archive
- Installing sebastian/version (4.0.1): Extracting archive
- Installing sebastian/type (4.0.0): Extracting archive
- Installing sebastian/recursion-context (5.0.0): Extracting archive
- Installing sebastian/object-reflector (3.0.0): Extracting archive
- Installing sebastian/object-enumerator (5.0.0): Extracting archive
- Installing sebastian/global-state (6.0.1): Extracting archive
- Installing sebastian/exporter (5.1.1): Extracting archive
- Installing sebastian/environment (6.0.1): Extracting archive
- Installing sebastian/diff (5.0.3): Extracting archive
- Installing sebastian/comparator (5.0.1): Extracting archive
- Installing sebastian/code-unit (2.0.0): Extracting archive
- Installing sebastian/cli-parser (2.0.0): Extracting archive
- Installing phpuunit/php-timer (6.0.0): Extracting archive
- Installing phpuunit/php-text-template (3.0.1): Extracting archive
- Installing phpuunit/php-invoker (4.0.0): Extracting archive
- Installing phpuunit/php-file-iterator (4.1.0): Extracting archive
- Installing thescraper/tokenizer (1.2.2): Extracting archive
```

Tu primer proyecto Laravel

- Una vez creado el proyecto, inicia el servidor de desarrollo local de Laravel mediante el comando serve de la CLI Artisan de Laravel.

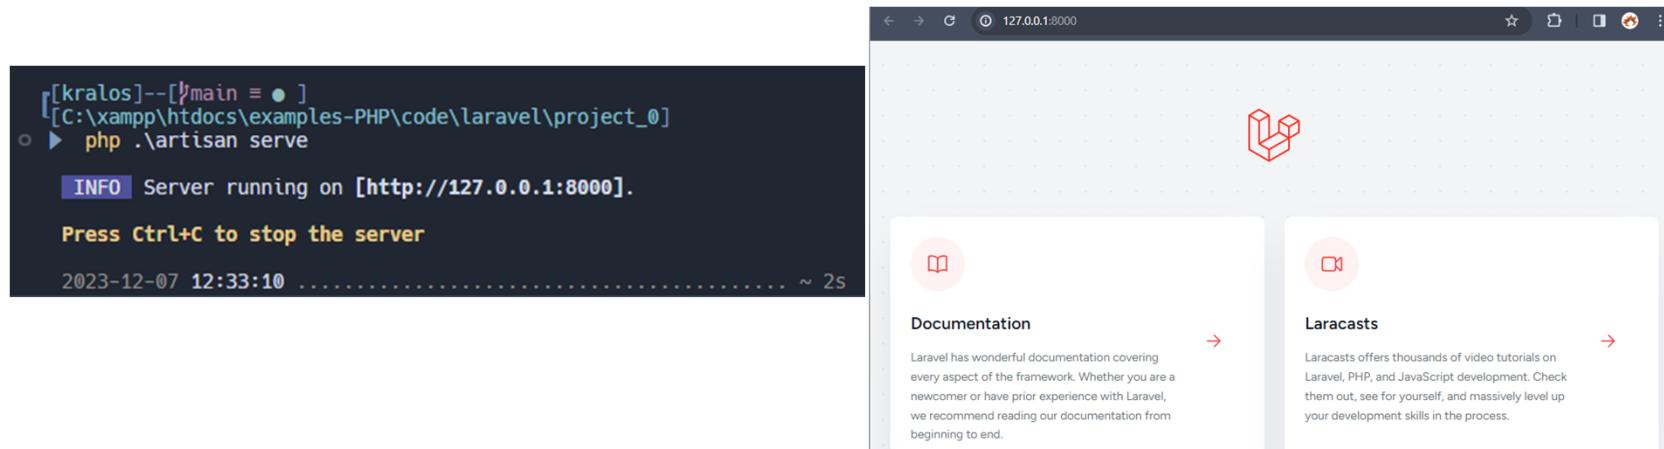

Carpetas más importantes

- app: Contiene la lógica principal de la aplicación, como los controladores, las excepciones, las solicitudes, etc.
- bootstrap: Contiene los archivos de inicialización de la aplicación, incluyendo la carga de archivos de entorno y la configuración de la configuración.
- config: Contiene la configuración de la aplicación, incluyendo la configuración de la base de datos, el correo electrónico y la aplicación.
- database: Contiene las migraciones de la base de datos, las semillas y las fábricas.
- public: Contiene el archivo index.php que es el punto de entrada de la aplicación, así como cualquier archivo público, como CSS, JavaScript e imágenes.

Carpetas más importantes

- resources: Contiene los recursos de la aplicación, incluyendo las vistas, los archivos CSS, los archivos JavaScript y los archivos de idioma.
- routes: Contiene las rutas de la aplicación, incluyendo las rutas web y API.
- storage: Contiene los archivos de almacenamiento de la aplicación, como las imágenes cargadas y los registros.
- tests: Contiene las pruebas de la aplicación.
- vendor: Contiene las dependencias de la aplicación instaladas por Composer.
- .env: Archivo de entorno de la aplicación, que contiene la configuración específica de la máquina, como la información de la base de datos y la configuración de correo electrónico.

Carpetas más importantes


- `.env.example`: Ejemplo del archivo de entorno de la aplicación.
- `composer.json`: Archivo de configuración de Composer, que especifica las dependencias de la aplicación.
- `composer.lock`: Archivo generado por Composer que especifica las versiones exactas de las dependencias instaladas.
- `package.json`: Archivo de configuración de npm, que especifica las dependencias de JavaScript de la aplicación.
- `README.md`: Archivo de documentación de la aplicación.

Primeros pasos {Código inicial}

examples-PHP\code\laravel\project_0\resources\views\welcome.blade.php

Primeros pasos {Código inicial}

examples-PHP\code\laravel\project_0\resources\views\home.blade.php

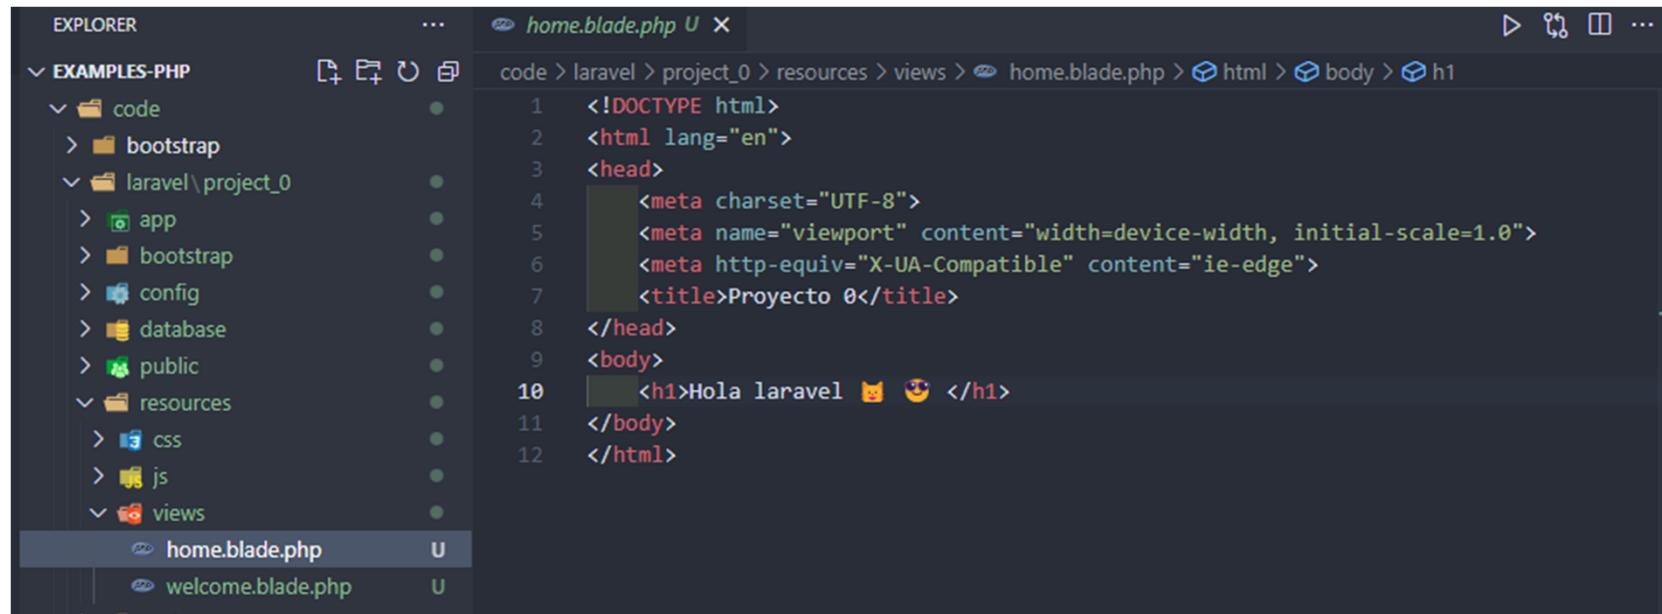

The screenshot shows a code editor interface with the following details:

- EXPLORER** sidebar: Shows the project structure:
 - EXAMPLES-PHP
 - code
 - bootstrap
 - laravel\project_0
 - app
 - bootstrap
 - config
 - database
 - public
 - resources
 - css
 - js
 - views
 - home.blade.php
 - welcome.blade.php
- home.blade.php** tab: Active tab in the editor.
- Code Editor Area:**

```
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta name="viewport" content="width=device-width, initial-scale=1.0">
6      <meta http-equiv="X-UA-Compatible" content="ie-edge">
7      <title>Proyecto 0</title>
8  </head>
9  <body>
10     <h1>Hola laravel 🐱 😊 </h1>
11  </body>
12  </html>
```


Primeros pasos {Código inicial}

The image shows two side-by-side code editors, likely from a IDE like VS Code, displaying the same file: `web.php`. Both editors show the same code content, which is the initial configuration for a Laravel application's web routes.

```
<?php  
use Illuminate\Support\Facades\Route;  
  
Route::get('/', function () {  
    return view('welcome');  
});
```

The left editor's sidebar shows the project structure under `EXAMPLES-PHP`, including `code`, `bootstrap`, `laravel\project_0` (which contains `app`, `bootstrap`, `config`, `database`, `public`, `resources` with `css` and `js`, and `views` with `home.blade.php` and `welcome.blade.php`), and `routes` (with `api.php`, `channels.php`, `console.php`, and `web.php`).

The right editor also shows the same project structure and highlights the same line of code (`return view('welcome');`) as the left editor.

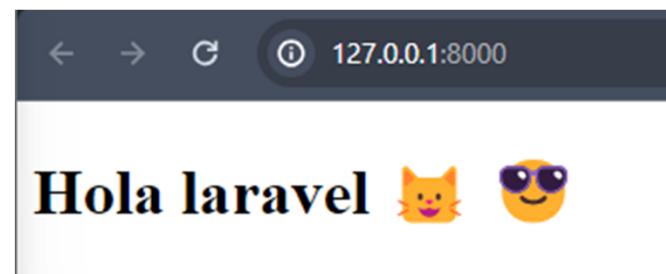

{¿Qué es artisan?}

- La interfaz de línea de comandos de Laravel.
- Artisan está basado en el componente Console de Symfony y nos ofrece un conjunto de comandos que nos pueden ayudar a realizar diferentes tareas durante el desarrollo e incluso cuando la aplicación se encuentra en producción.
- Para conocer el listado completo de los comandos disponibles ejecutamos en consola, en el directorio raíz de un proyecto de Laravel: ***php artisan list***

{¿Qué es artisan?}

```
[kralos]--[● main = ● ]
[C:\xampp\htdocs\examples-PHP\code\laravel\project_0]
▶ php artisan list
Laravel Framework 10.35.0

Usage:
  command [options] [arguments]

Options:
  -h, --help           Display help for the given command. When no command is given display help for the list command
  and
  -q, --quiet          Do not output any message
  -V, --version         Display this application version
  --ansi|--no-ansi     Force (or disable --no-ansi) ANSI output
  -n, --no-interaction Do not ask any interactive question
  --env[=ENV]            The environment the command should run under
  -v|vv|vvv, --verbose Increase the verbosity of messages: 1 for normal output, 2 for more verbose output and 3 for debug
```


```
[kralos]--[● main = ● ]
[C:\xampp\htdocs\examples-PHP\code\laravel\project_0]
▶ php artisan route:list

GET|HEAD   /
POST      _ignition/execute-solution ignition.executeSolution > Spatie\LaravelIgnition > ExecuteSolutionController
GET|HEAD   _ignition/health-check ..... ignition.healthCheck > Spatie\LaravelIgnition > HealthCheckController
POST      _ignition/update-config .... ignition.updateConfig > Spatie\LaravelIgnition > UpdateConfigController
GET|HEAD   api/user .....
GET|HEAD   sanctum/csrf-cookie ....... sanctum.csrf-cookie > Laravel\Sanctum > CsrfCookieController@show

Showing [6] routes
```

{¿Qué es artisan?}

```
[kralos]--[~] main
[C:\xampp\htdocs\examples-PHP\code\laravel\project_0]
▶ php artisan make:view main
INFO View [C:\xampp\htdocs\examples-PHP\code\laravel\project_0\resources\views\main.blade.php] created successfully.
```

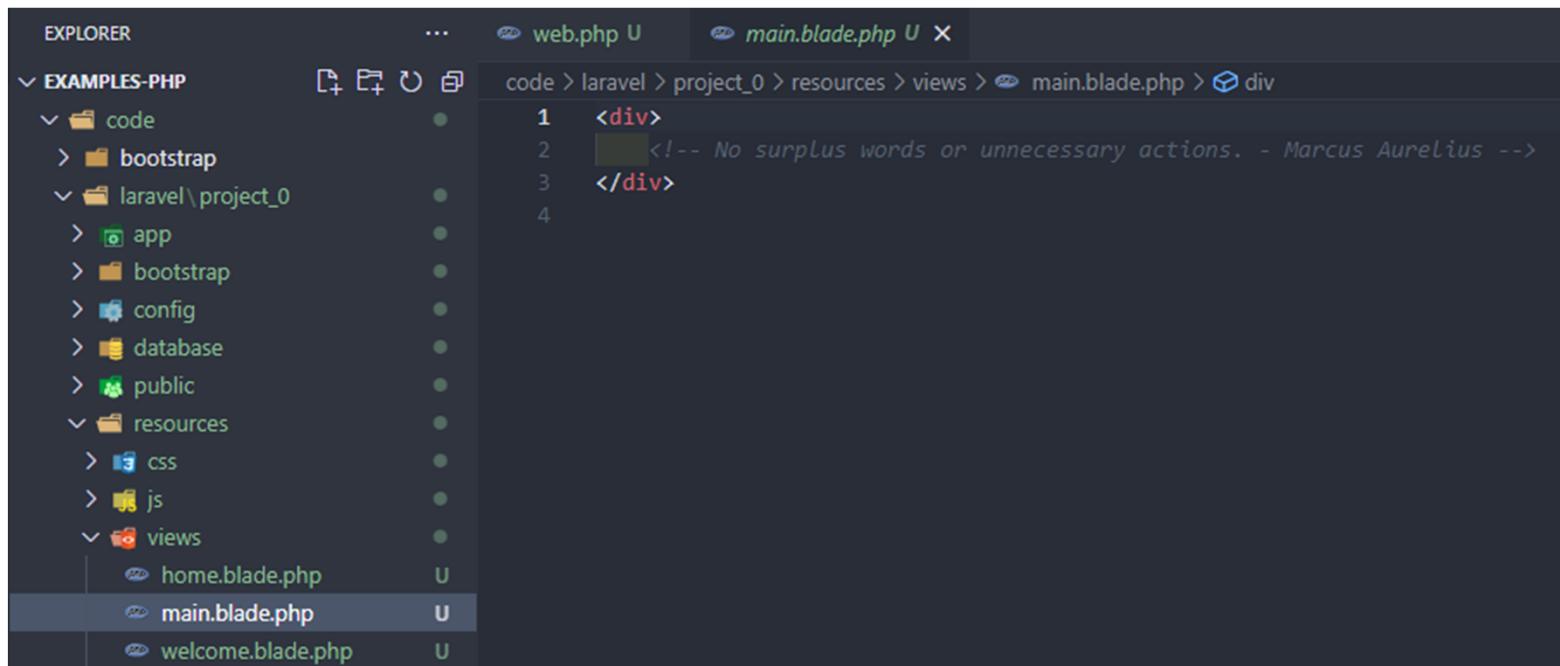

Configuración del proyecto

- Todos los archivos de configuración para el framework Laravel se almacenan en el directorio config. Cada opción está documentada.

```
code > laravel > project_0 > config > app.php
1  <?php
2
3  use Illuminate\Support\Facades\Facade;
4  use Illuminate\Support\ServiceProvider;
5
6  return [
7
8      /*
9      |--------------------------------------------------------------------------
10     | Application Name
11     |--------------------------------------------------------------------------
12     |
13     | This value is the name of your application. This value is used when the
14     | framework needs to place the application's name in a notification or
15     | any other location as required by the application or its packages.
16     |
17     */
18
19     'name' => env('APP_NAME', 'Laravel'),
```

Configuración del proyecto

php artisan about

```
[C:\xampp\htdocs\examples-PHP\code\laravel\project_0]
• ▶ php artisan about

Environment . . . . .
Application Name . . . . . Laravel
Laravel Version . . . . . 10.35.0
PHP Version . . . . . 8.2.12
Composer Version . . . . . 2.6.5
Environment . . . . . local
Debug Mode . . . . . ENABLED
URL . . . . . localhost
Maintenance Mode . . . . OFF

Cache . . . . .
Config . . . . . NOT CACHED
Events . . . . . NOT CACHED
Routes . . . . . NOT CACHED
Views . . . . . CACHED

Drivers . . . . .
Broadcasting . . . . . log
Cache . . . . . file
Database . . . . . mysql
Logs . . . . . stack / single
Mail . . . . . smtp
Queue . . . . . sync
Session . . . . . file
```

Configuración del entorno

- Laravel utiliza la librería PHP DotEnv. En una nueva instalación de Laravel, el directorio raíz de su aplicación contendrá un archivo `.env.example` que define muchas variables de entorno comunes.
- Durante el proceso de instalación de Laravel, este archivo se copiará automáticamente a `.env`.

Configuración del entorno

- El archivo .env por defecto de Laravel contiene algunos valores de configuración comunes que pueden diferir en función de si la aplicación se ejecuta localmente o en un servidor web de producción. Estos valores se recuperan de varios archivos de configuración de Laravel dentro del directorio config utilizando la función env de Laravel.


Configuración del entorno

- Su archivo .env no debe ser enviado al control de código fuente de la aplicación, ya que cada desarrollador / servidor que utilice la aplicación podría requerir una configuración de entorno diferente.
- Además, esto supondría un riesgo de seguridad en el caso de que un intruso accediera a su repositorio de control de código fuente, ya que cualquier credencial sensible quedaría expuesta.

Configuración del entorno

```
code > laravel > project_0 > ⚙ .env
 1 APP_NAME=Laravel
 2 APP_ENV=local
 3 APP_KEY=base64:R+8sdo8VlOUWEB01Nnd6+2PxM6jMWiTdkMSfAdVqOOE=
 4 APP_DEBUG=true
 5 APP_URL=http://localhost
 6
 7 LOG_CHANNEL=stack
 8 LOG_DEPRECATED_CHANNEL=null
 9 LOG_LEVEL=debug
10
11 DB_CONNECTION=mysql
12 DB_HOST=127.0.0.1
13 DB_PORT=3306
14 DB_DATABASE=laravel
15 DB_USERNAME=root
16 DB_PASSWORD=
```

Creando la BD

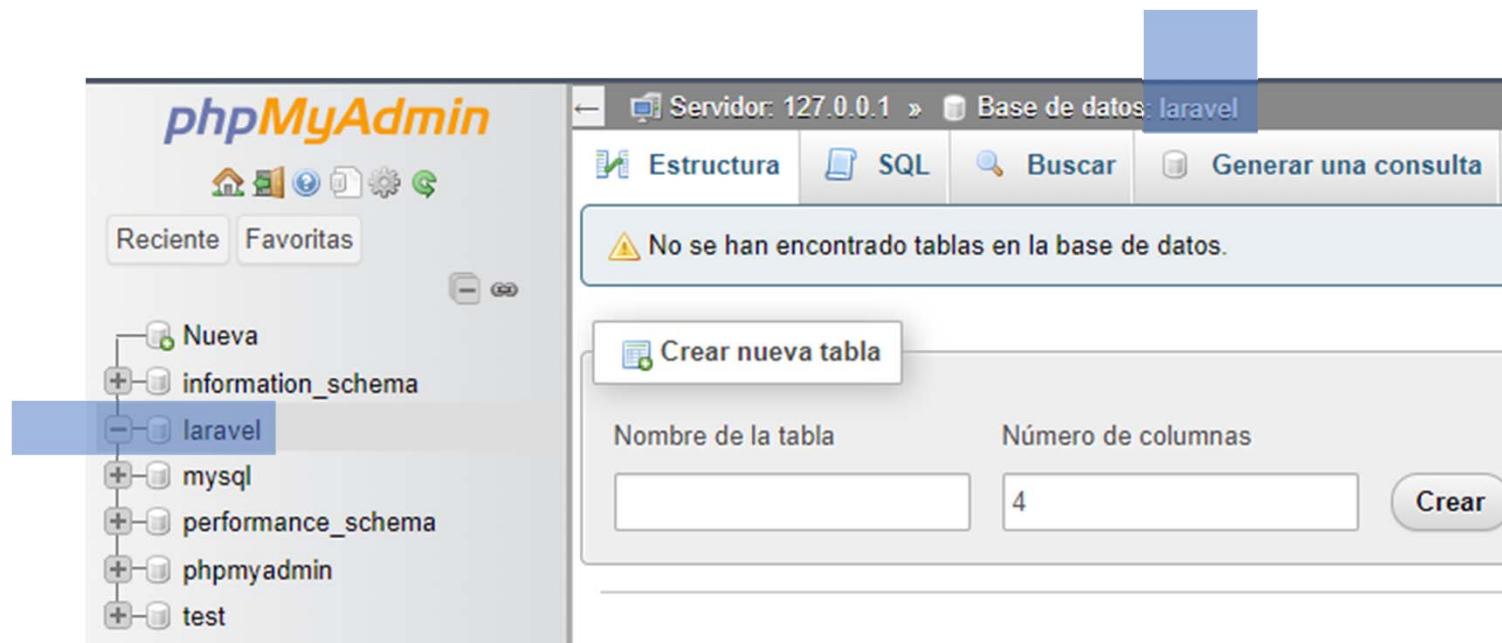


Creando la BD


php artisan migrate

```
[kralos]--[¶main ≡]
[C:\xampp\htdocs\examples-PHP\code\laravel\project_0]
• ► php artisan migrate
  INFO | Preparing database.
  Creating migration table ..... 78ms DONE
•
  INFO | Running migrations.

  2014_10_12_000000_create_users_table ..... 62ms DONE
  2014_10_12_100000_create_password_reset_tokens_table ..... 14ms DONE
  2019_08_19_000000_create_failed_jobs_table ..... 99ms DONE
  2019_12_14_000001_create_personal_access_tokens_table ..... 24ms DONE
```

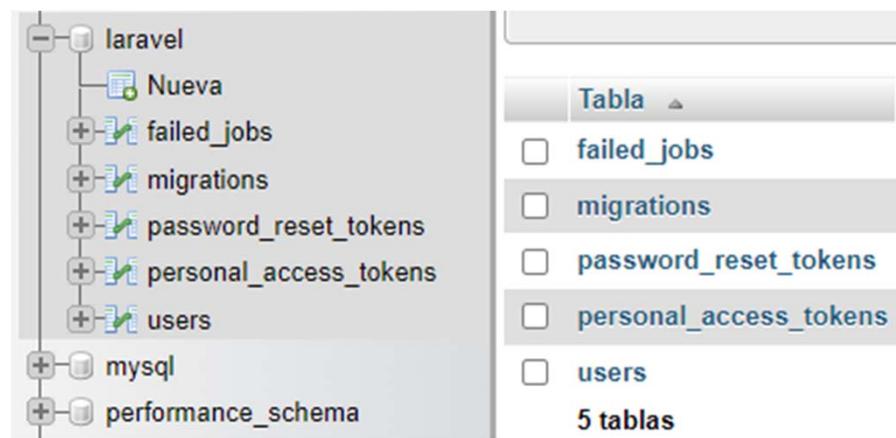

Comprobar el Login en Laravel

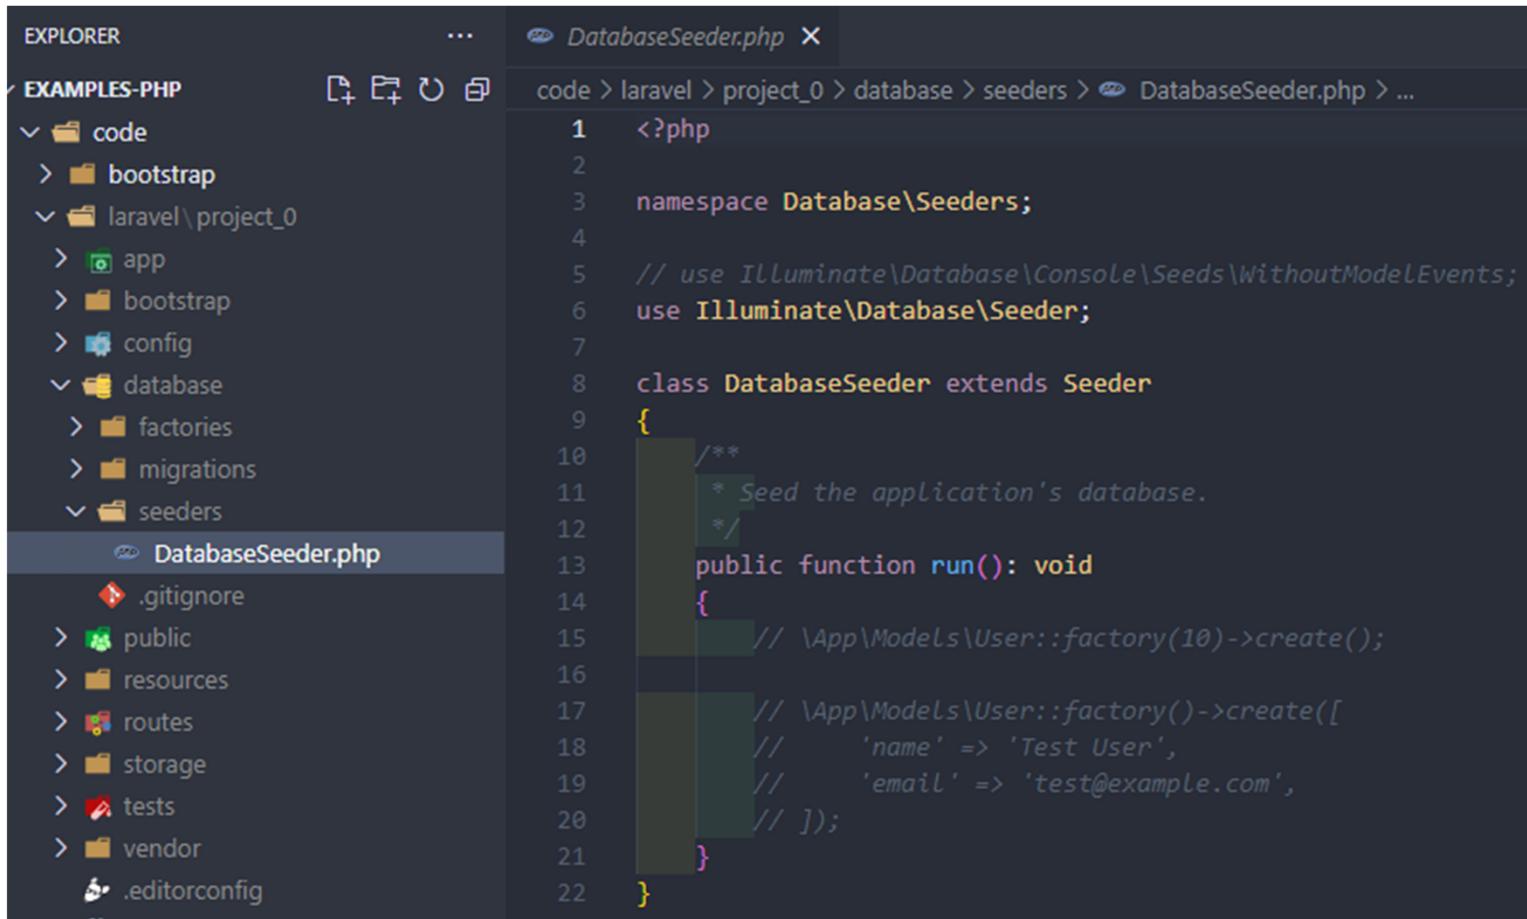

The screenshot shows a code editor interface with two main panes. The left pane, titled 'EXPLORER', displays the project structure of 'EXAMPLES-PHP'. It includes a 'code' folder containing 'bootstrap', and a 'laravel\project_0' folder containing 'app', 'bootstrap', 'config', 'database' (with 'factories' and 'migrations' subfolders), and 'seeders'. Inside 'seeders', there is a file named 'DatabaseSeeder.php'. The right pane shows the content of 'DatabaseSeeder.php'. The code is as follows:


```
<?php  
namespace Database\\Seeders;  
  
// use Illuminate\\Database\\Console\\Seeds\\WithoutModelEvents;  
use Illuminate\\Database\\Seeder;  
  
class DatabaseSeeder extends Seeder  
{  
    /**  
     * Seed the application's database.  
     */  
    public function run(): void  
{  
        // \\App\\Models\\User::factory(10)->create();  
        // \\App\\Models\\User::factory()->create([  
        //     'name' => 'Test User',  
        //     'email' => 'test@example.com',  
        // ]);  
    }  
}
```

Comprobar el Login en Laravel

```
public function run(): void
{
    \App\Models\User::factory(10)->create();

    \App\Models\User::factory()->create([
        'name' => 'Umarino',
        'email' => 'umarino@aulavirtual.umar.mx',
        'password' => bcrypt('12345678')
    ]);
}
```

php artisan db:seed

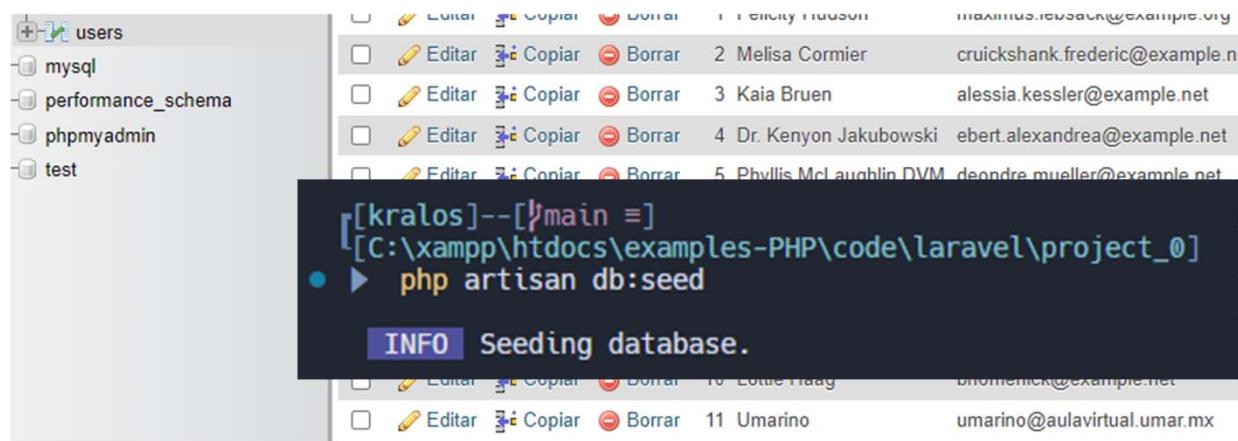


¿Bcrypt?


- Bcrypt es una función de hash de contraseñas y derivación de claves para contraseñas basada en el cifrado Blowfish. Se supone que la función de derivación de claves es lenta, lo que dificulta la fuerza bruta de la contraseña. Tanto el sistema operativo OpenBSD como el software OpenSSH emplean este algoritmo hash.

Controlador para la Autenticación

php artisan make:controller AuthController

```
[kralos]--[~] main
[C:\xampp\htdocs\examples-PHP\code\laravel\project_0]
● ▶ php artisan make:controller AuthController
INFO Controller [C:\xampp\htdocs\examples-PHP\code\laravel\project_0\app\Http\Controllers\AuthController.php] created successfully.
```

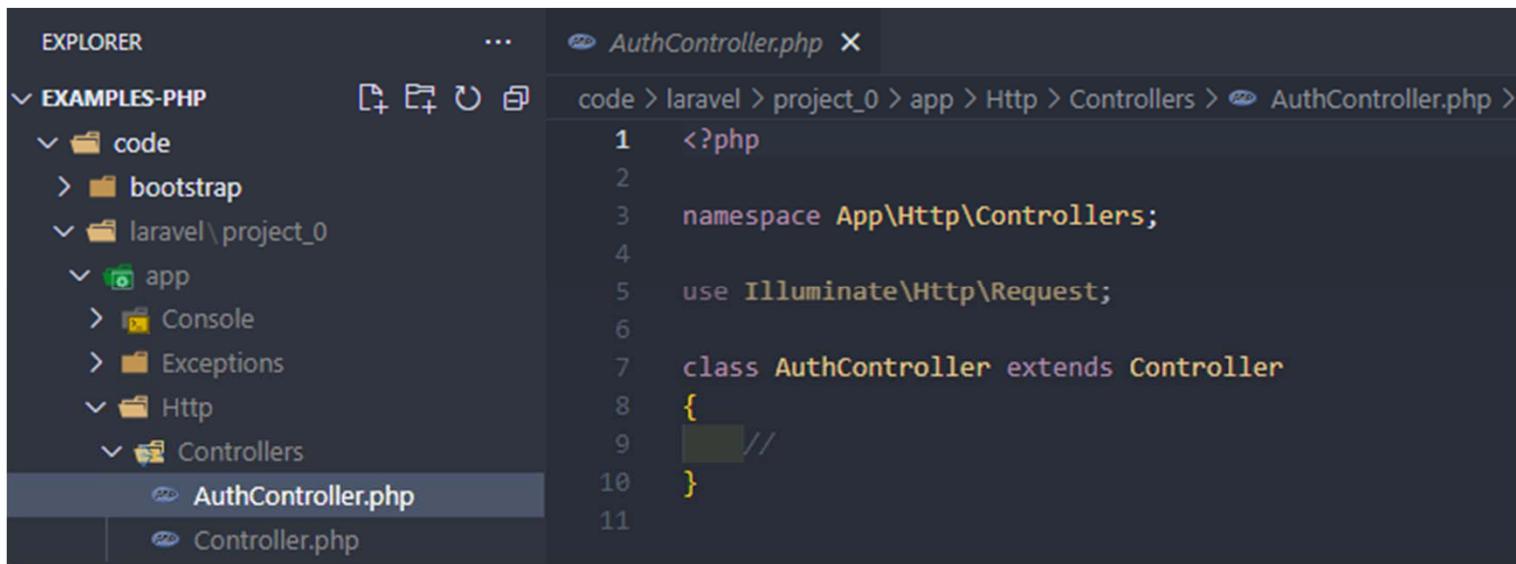

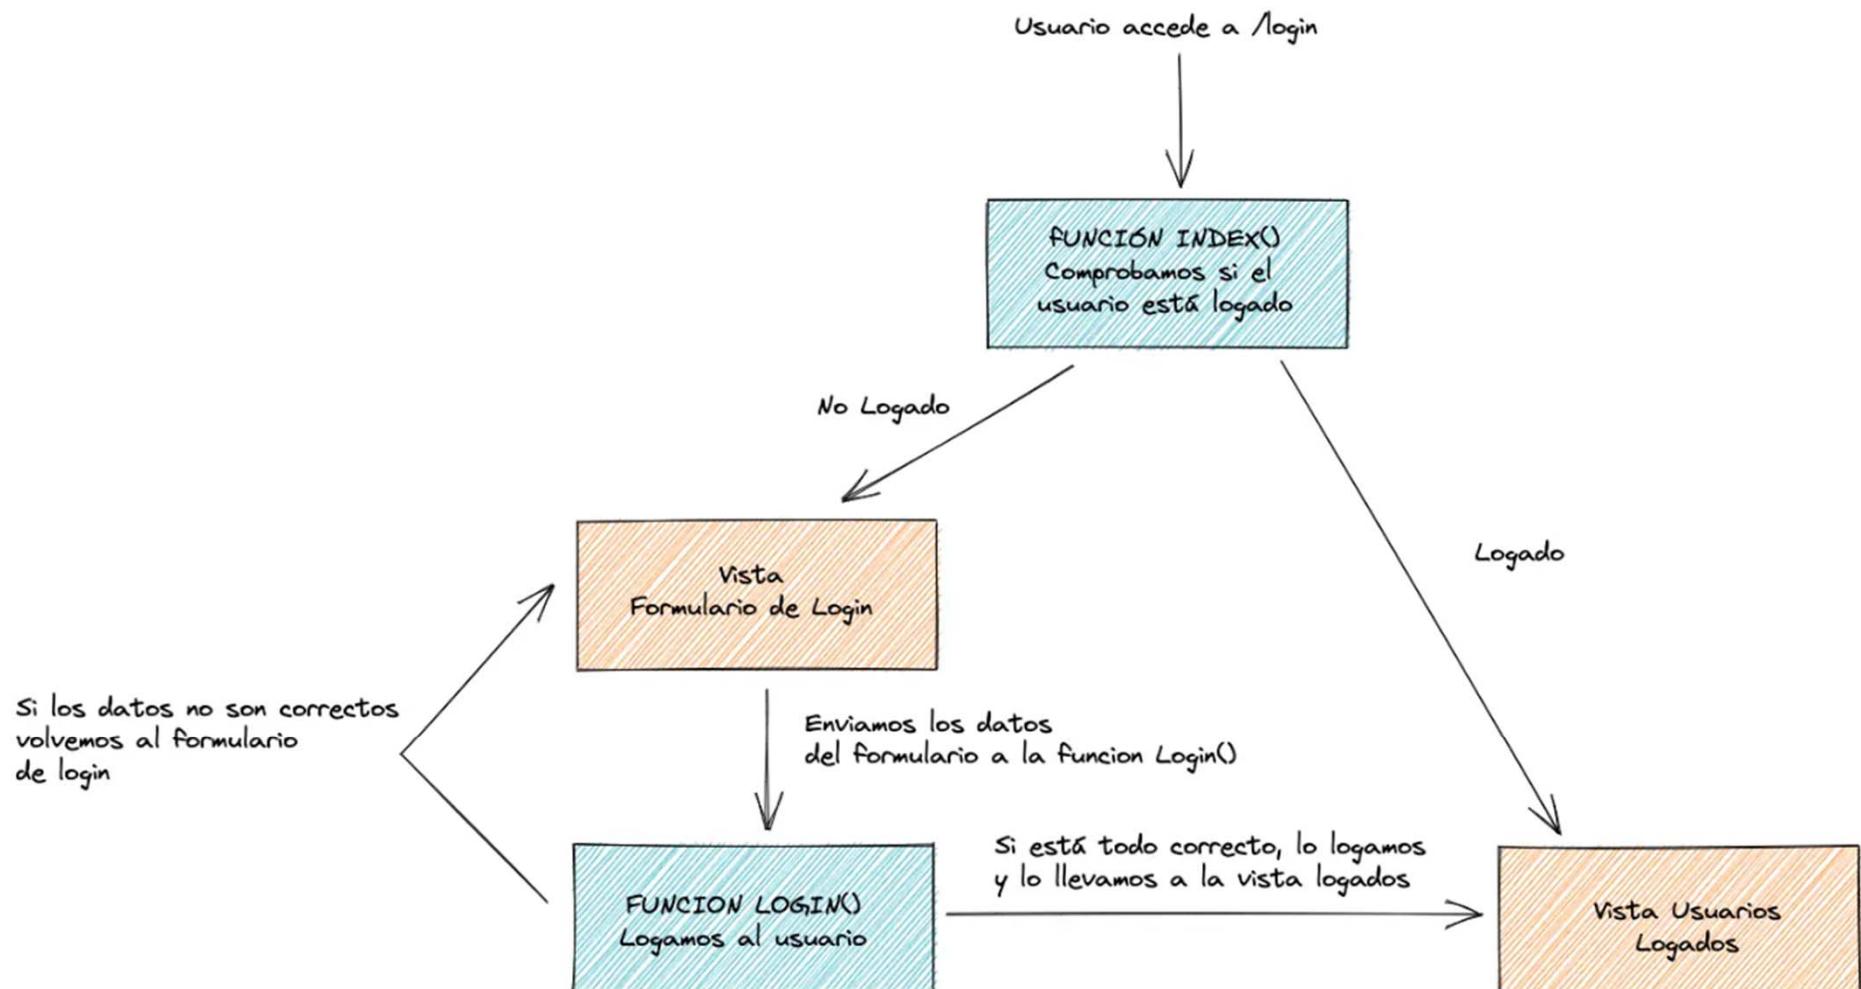

@dCreations_dev

Index

```
/*
 * Función que muestra la vista de logados o la vista con el formulario de Login
 */
public function index()
{
    // Comprobamos si el usuario ya está logado
    if (Auth::check()) {

        // Si está logado le mostramos la vista de logados
        return view('logados');
    }

    // Si no está logado le mostramos la vista con el formulario de login
    return view('login');
}
```

Login

```
/*
 * Función que se encarga de recibir los datos del formulario de login, comprobar que el usuario existe y
 * en caso correcto logar al usuario
 */
public function login(Request $request)
{
    // Comprobamos que el email y la contraseña han sido introducidos
    $request->validate([
        'email' => 'required',
        'password' => 'required',
    ]);

    // Almacenamos las credenciales de email y contraseña
    $credentials = $request->only('email', 'password');

    // Si el usuario existe lo logamos y lo llevamos a la vista de "logados" con un mensaje
    if (Auth::attempt($credentials)) {
        return redirect()->intended('logados')
            ->withSuccess('Logado Correctamente');
    }

    // Si el usuario no existe devolvemos al usuario al formulario de login con un mensaje de error
    return redirect("/")->withSuccess('Los datos introducidos no son correctos');
}
```

Logados

```
/*
 * Función que muestra la vista de logados si el usuario está logado y si no le devuelve al formulario de login
 * con un mensaje de error
 */
public function logados()
{
    if (Auth::check()) {
        return view('logados');
    }

    return redirect("/")->withSuccess('No tienes acceso, por favor inicia sesión');
}
```


Crear las rutas para la Autenticación

The screenshot shows a code editor interface with the following details:

- EXPLORER** sidebar: Shows the project structure under "EXAMPLES-PHP". Key folders include "code", "bootstrap", "laravel\project_0" (containing "app", "bootstrap", "config", "database", "public", "resources"), and "routes" (containing "api.php", "channels.php", "console.php", and "web.php").
- web.php** tab in the editor: The file is located at "code > laravel > project_0 > routes > web.php".
- Code Content:**

```
1  <?php
2
3  use Illuminate\Support\Facades\Route;
4
5  /*
6  |--------------------------------------------------------------------------
7  | Web Routes
8  |--------------------------------------------------------------------------
9  |
10 | Here is where you can register web routes for your application. These
11 | routes are loaded by the RouteServiceProvider and all of them will
12 | be assigned to the "web" middleware group. Make something great!
13 |
14 */
15
16 Route::get('/', function () {
17     return view('home');
18 });
19
```

Crear las rutas para la Autenticación

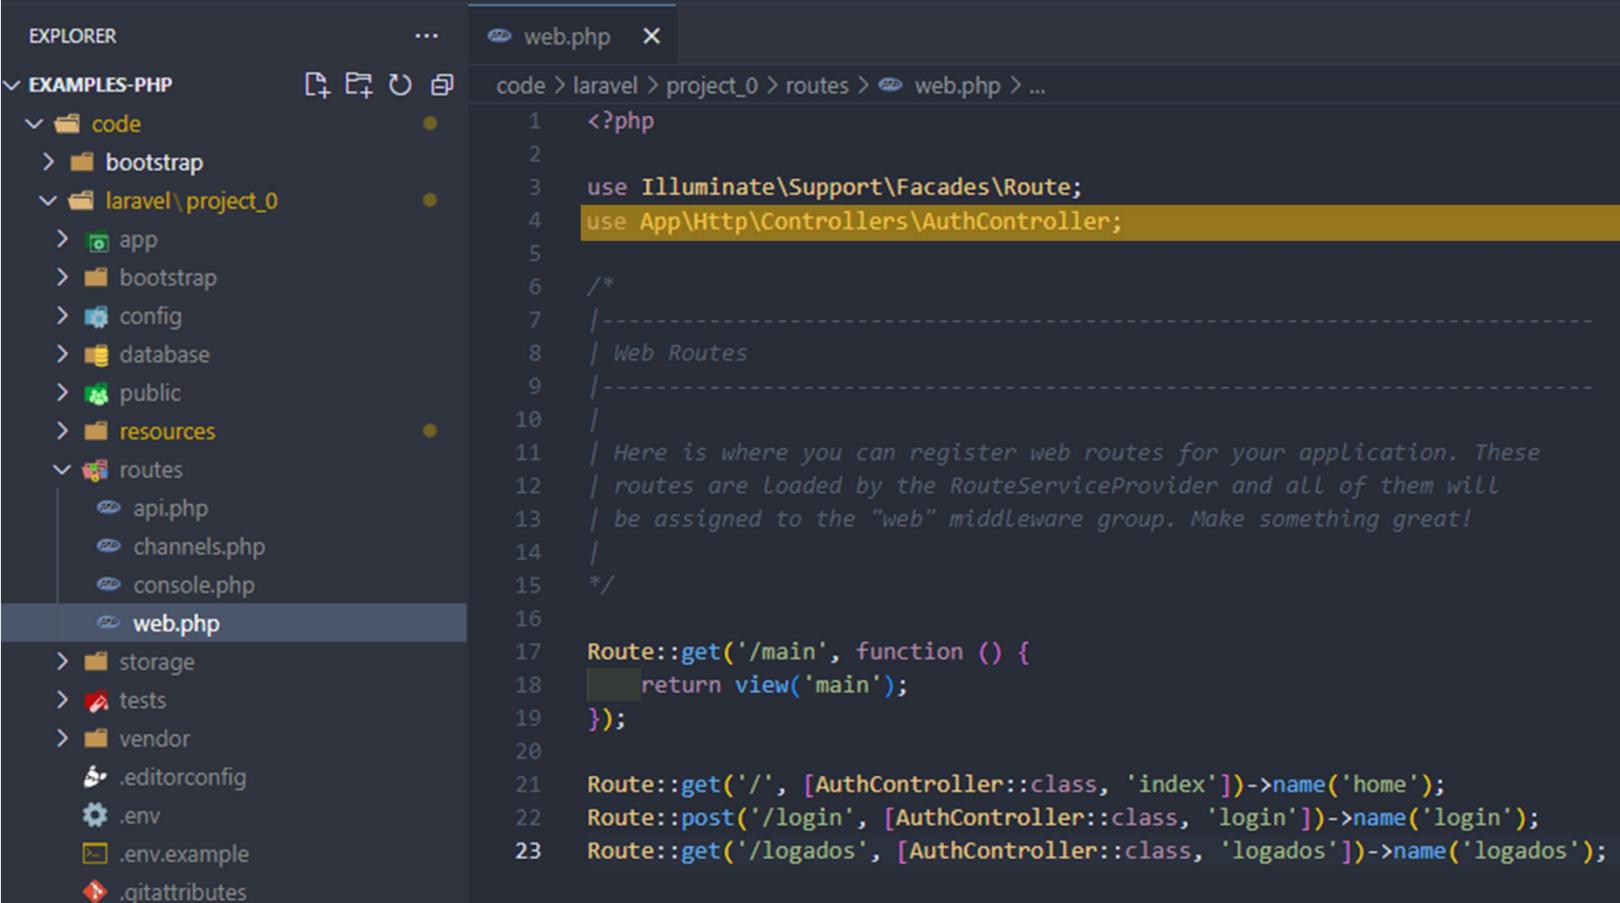

The screenshot shows a code editor interface with the following details:

- EXPLORER** sidebar on the left showing the project structure:

 - EXAMPLES-PHP** root folder
 - code** folder
 - laravel\project_0** folder
 - app**
 - bootstrap**
 - config**
 - database**
 - public**
 - resources**
 - routes** folder
 - api.php**
 - channels.php**
 - console.php**
 - web.php** (highlighted)
 - storage**
 - tests**
 - vendor**
 - .editorconfig**
 - .env**
 - .env.example**
 - .gitattributes**

- web.php** tab in the top bar.
- File content (highlighted line 4):

```
1 <?php
2
3 use Illuminate\Support\Facades\Route;
4 use App\Http\Controllers\AuthController;
```


The code defines routes for the application, including a main route and authentication routes for login and logados.

Crear las vistas para la Autenticación

```
[kralos]--[~/main =>]
[C:\xampp\htdocs\examples-PHP\code\laravel\project_0]
▶ php artisan make:view app
INFO View [C:\xampp\htdocs\examples-PHP\code\laravel\project_0\resources\views\app.blade.php] created successfully.

[kralos]--[~/main =>]
[C:\xampp\htdocs\examples-PHP\code\laravel\project_0]
▶ php artisan make:view login
INFO View [C:\xampp\htdocs\examples-PHP\code\laravel\project_0\resources\views\login.blade.php] created successfully.

[kralos]--[~/main =>]
[C:\xampp\htdocs\examples-PHP\code\laravel\project_0]
▶ php artisan make:view logados
INFO View [C:\xampp\htdocs\examples-PHP\code\laravel\project_0\resources\views\logados.blade.php] created successfully.
```

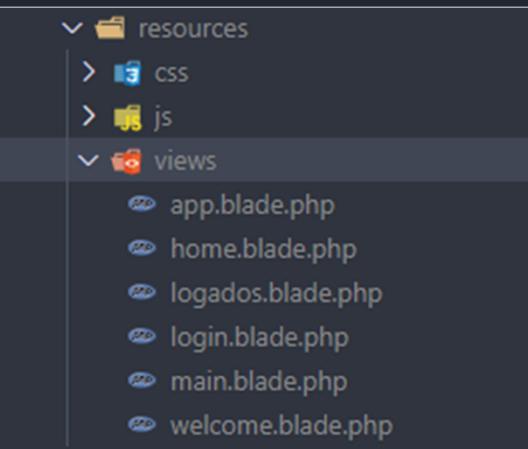

The screenshot shows a file explorer window with a dark theme. The 'views' directory is expanded, displaying six blade files: app.blade.php, home.blade.php, logados.blade.php, login.blade.php, main.blade.php, and welcome.blade.php. The 'views' folder icon has a red outline, indicating it is selected or highlighted.

Vista app

```
<!DOCTYPE html>
<html lang="{{ str_replace('_', '-', app()->getLocale()) }}>
    <head>
        <meta charset="utf-8">
        <meta name="viewport" content="width=device-width, initial-scale=1">

        <title>Laravel</title>

        <!-- Fonts -->
        <link href="https://fonts.bunny.net/css2?family=Nunito:wght@400;600;700&display=swap" rel="stylesheet">

        <style>
            body {
                font-family: 'Nunito', sans-serif;
            }
        </style>
    </head>
    <body >
        @yield('content')
    </body>
</html>
```


Vista login

```
@extends('app')
@section('content')
@if(session('success'))
    <h1>{{session('success')}}</h1>
@endif
<main class="login-form">
    <div class="cotainer">
        <div class="row justify-content-center">
            <div class="col-md-4">
                <div class="card">
                    <h3 class="card-header text-center">Formulario Login</h3>
                    <div class="card-body">
                        <form method="POST" action="{{ route('login') }}>
                            @csrf
                            <div class="form-group mb-3">
                                <input type="text" placeholder="Email" id="email" class="form-control" name="email" required
                                       autofocus>
                                @if ($errors->has('email'))
                                    <span class="text-danger">{{ $errors->first('email') }}</span>
                                @endif
                            </div>
                            <div class="form-group mb-3">
                                <input type="password" placeholder="Password" id="password" class="form-control" name="password" required>
                                @if ($errors->has('password'))
                                    <span class="text-danger">{{ $errors->first('password') }}</span>
                                @endif
                            </div>
                            <div class="form-group mb-3">
                                <div class="checkbox">
                                    <label>
                                        <input type="checkbox" name="remember"> Recuerdame
                                    </label>
                                </div>
                            </div>
                            <div class="d-grid mx-auto">
                                <button type="submit" class="btn btn-dark btn-block">Enviar</button>
                            </div>
                        </form>
                    </div>
                </div>
            </div>
        </div>
    </div>
</main>
@endsection
```

Vista logados

```
@extends('app')
@section('content')
<main class="login-form">
    <div class="cotainer">
        <div class="row justify-content-center">
            <div class="col-md-4">
                <div class="card">
                    <h1>USUARIO LOGADO</h1>
                </div>
            </div>
        </div>
    </div>
</main>
@endsection
```

Pruebas de Autenticación

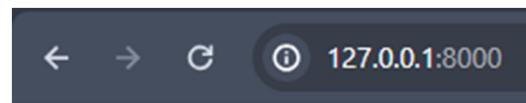


Formulario Login

Email
Password
 Recuerdame
Enviar



Formulario Login

umarino@aulavirtual.umar.m
.....
 Recuerdame
Enviar



USUARIO LOGADO

Bootstrap en Laravel

```
• ▶ composer require laravel/ui
./composer.json has been updated
Running composer update laravel/ui
Loading composer repositories with package information
Updating dependencies
Lock file operations: 1 install, 0 updates, 0 removals
- Locking laravel/ui (v4.2.3)
Writing lock file
Installing dependencies from lock file (including require-dev)
Package operations: 1 install, 0 updates, 0 removals
- Downloading laravel/ui (v4.2.3)
- Installing laravel/ui (v4.2.3): Extracting archive
Generating optimized autoload files
> Illuminate\Foundation\ComposerScripts::postAutoloadDump
> @php artisan package:discover --ansi

    INFO | Discovering packages.

laravel/sail ..... DONE
laravel/sanctum ..... DONE
laravel/tinker ..... DONE
laravel/ui ..... DONE
nesbot/carbon ..... DONE
nunomaduro/collision ..... DONE
nunomaduro/termwind ..... DONE
spatie/laravel-ignition ..... DONE

83 packages you are using are looking for funding.
Use the `composer fund` command to find out more!
> @php artisan vendor:publish --tag=laravel-assets --ansi --force

    INFO | No publishable resources for tag [laravel-assets].

No security vulnerability advisories found.
Using version ^4.2 for laravel/ui
```

Bootstrap en Laravel

```
• ➔ php artisan ui bootstrap  
INFO Bootstrap scaffolding installed successfully.  
WARN Please run [npm install && npm run dev] to compile your fresh scaffolding.
```

The screenshot shows a code editor interface with two main panes. On the left is the Explorer pane, which displays the project structure:

- EXAMPLES-PHP
- code
- bootstrap
- laravel\project_0
 - app
 - bootstrap
 - config
 - database
 - public
- resources
 - css
 - js
 - sass
 - _variables.scss
 - app.scss


On the right is the Editor pane, showing the content of the app.scss file:

```
code > laravel > project_0 > resources > sass > app.scss  
1 // Fonts  
2 @import url('https://fonts.bunny.net/css?family=Nunito');  
3  
4 // Variables  
5 @import 'variables';  
6  
7 // Bootstrap  
8 @import 'bootstrap/scss/bootstrap';  
9
```

Bootstrap en Laravel

```
[kralos]--[|main ≡]
[C:\xampp\htdocs\examples-PHP\code\laravel\project_0]
● ▶ npm install
    added 37 packages, and audited 38 packages in 21s
    8 packages are looking for funding
        run `npm fund` for details
    found 0 vulnerabilities
[kralos]--[|main ≡]
[C:\xampp\htdocs\examples-PHP\code\laravel\project_0]
● ▶ npm run build
> build
> vite build
vite v4.5.1 building for production...
✓ 105 modules transformed.
public/build/manifest.json      0.26 kB | gzip: 0.14 kB
public/build/assets/app-041e359a.css 225.70 kB | gzip: 30.43 kB
public/build/assets/app-39dcccde.js 111.42 kB | gzip: 36.37 kB
✓ built in 4.90s
```

Bootstrap en Laravel

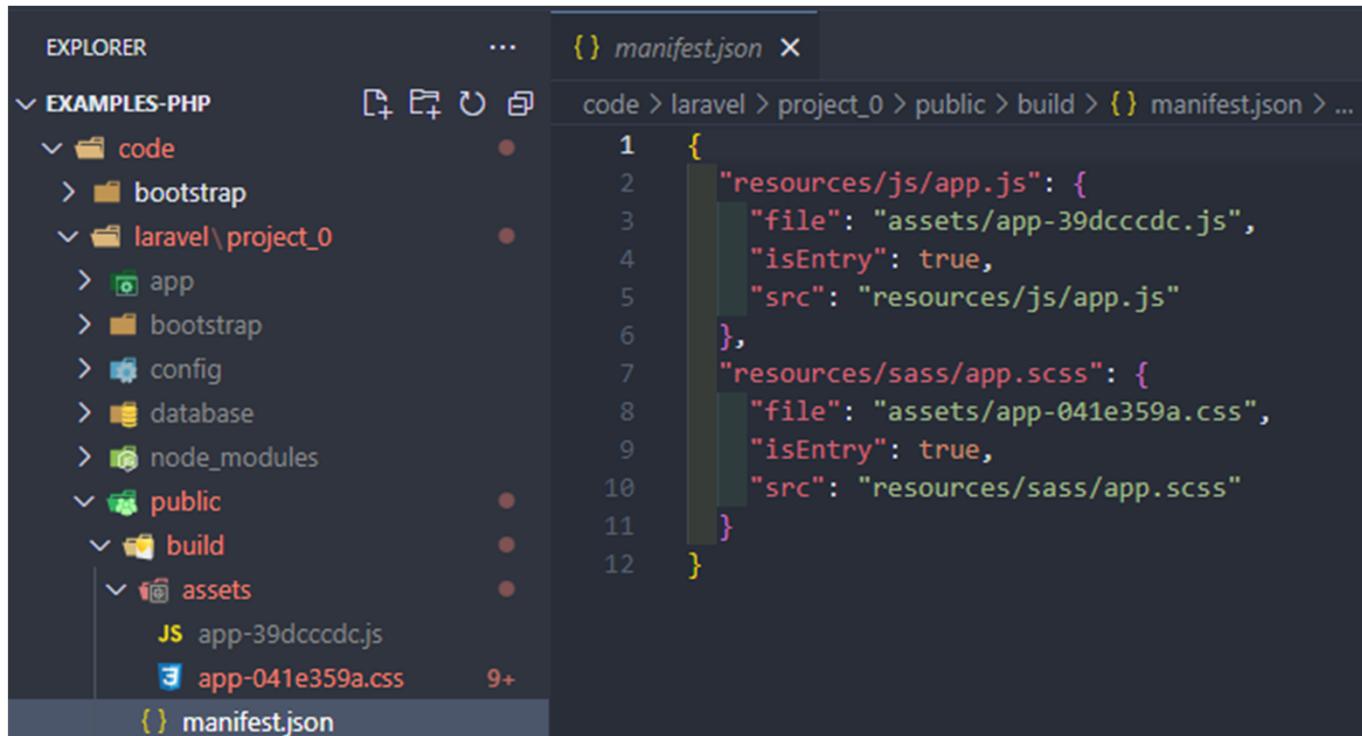

The screenshot shows a code editor interface with two main panes. On the left is the Explorer pane, which displays the project structure:

- EXAMPLES-PHP
- code
- laravel\project_0
 - app
 - bootstrap
 - config
 - database
 - node_modules
- public
 - build
 - assets
 - JS app-39dcccde.js
 - CSS app-041e359a.css

At the bottom of the Explorer pane, there is a tab for manifest.json.

The right pane shows the content of the manifest.json file:

```
{} manifest.json X
code > laravel > project_0 > public > build > {} manifest.json > ...
1  {
2    "resources/js/app.js": {
3      "file": "assets/app-39dcccde.js",
4      "isEntry": true,
5      "src": "resources/js/app.js"
6    },
7    "resources/sass/app.scss": {
8      "file": "assets/app-041e359a.css",
9      "isEntry": true,
10     "src": "resources/sass/app.scss"
11   }
12 }
```

Bootstrap en Laravel

The image shows a code editor window for `main.blade.php` and a browser preview window. The code editor displays the following blade template:

```
code > laravel > project_0 > resources > views > main.blade.php > html > body > div#app > main.container > h1
1  <!doctype html>
2  <html lang="{{ str_replace('_', '-', app()->getLocale()) }}">
3  <head>
4      <meta charset="utf-8">
5      <meta name="viewport" content="width=device-width, initial-scale=1">
6
7      <!-- CSRF Token -->
8      <meta name="csrf-token" content="{{ csrf_token() }}>
9
10     <title>{{ config('app.name', 'Laravel') }}</title>
11
12     <!-- Scripts -->
13     @vite(['resources/sass/app.scss', 'resources/js/app.js'])
14
15     <style type="text/css">
16         i{
17             font-size: 50px;
18         }
19     </style>
20
21 </head>
22 <body>
23     <div id="app">
24
25         <main class="container">
26             <h1> How to Install Bootstrap 5 in Laravel 10 </h1>
27             <div class="card">
28                 <div class="card-header">
29                     Icons
30                 </div>
```

The browser preview shows the rendered HTML with the title "How to Install Bootstrap 5 in Laravel 10" and a card containing the word "Icons".

Bootstrap en Laravel ... fonts

The screenshot shows a code editor interface with a dark theme. At the top, there's a file tab labeled "app.scss" and a close button "X". Below the tabs, a breadcrumb navigation bar shows the file path: "code > laravel > project_0 > resources > sass > app.scss". The main area contains the following SCSS code:

```
1 // Fonts
2 @import url('https://fonts.bunny.net/css?family=Nunito');
3
4 // Variables
5 @import 'variables';
6
7 // Bootstrap
8 @import 'bootstrap/scss/bootstrap';
9 @import 'bootstrap-icons/font/bootstrap-icons.css';
```

The last line of the code, "@import 'bootstrap-icons/font/bootstrap-icons.css';", is highlighted with a green background.

Below the code editor, there's a navigation bar with tabs: PROBLEMS (19), OUTPUT, DEBUG CONSOLE, TERMINAL (underlined), PORTS, and GITLENS. The TERMINAL tab is active.

The terminal window displays the following output:

```
[kralos]--[ψmain ≡]
[C:\xampp\htdocs\examples-PHP\code\laravel\project_0]
• ► npm install bootstrap-icons
  up to date, audited 39 packages in 2s
  9 packages are looking for funding
    run `npm fund` for details
  found 0 vulnerabilities
```

Bootstrap en Laravel ... fonts

```
[kralos]--[|main ≡]
[[C:\xampp\htdocs\examples-PHP\code\laravel\project_0]
● ▶ npm install
  up to date, audited 39 packages in 1s

  9 packages are looking for funding
    run `npm fund` for details

  found 0 vulnerabilities
[kralos]--[|main ≡]
[[C:\xampp\htdocs\examples-PHP\code\laravel\project_0]
● ▶ npm run build


> build
> vite build

vite v4.5.1 building for production...
✓ 105 modules transformed.
public/build/manifest.json          0.66 kB | gzip: 0.21 kB
public/build/assets/bootstrap-icons-5b2dd4d4.woff2 130.65 kB
public/build/assets/bootstrap-icons-d0346eea.woff 176.09 kB
public/build/assets/app-7ffffe3cb.css   301.35 kB | gzip: 44.30 kB
public/build/assets/app-39dcccde.js    111.42 kB | gzip: 36.37 kB
✓ built in 5.04s
```

Bootstrap en Laravel ... fonts



Bootstrap en Laravel - login

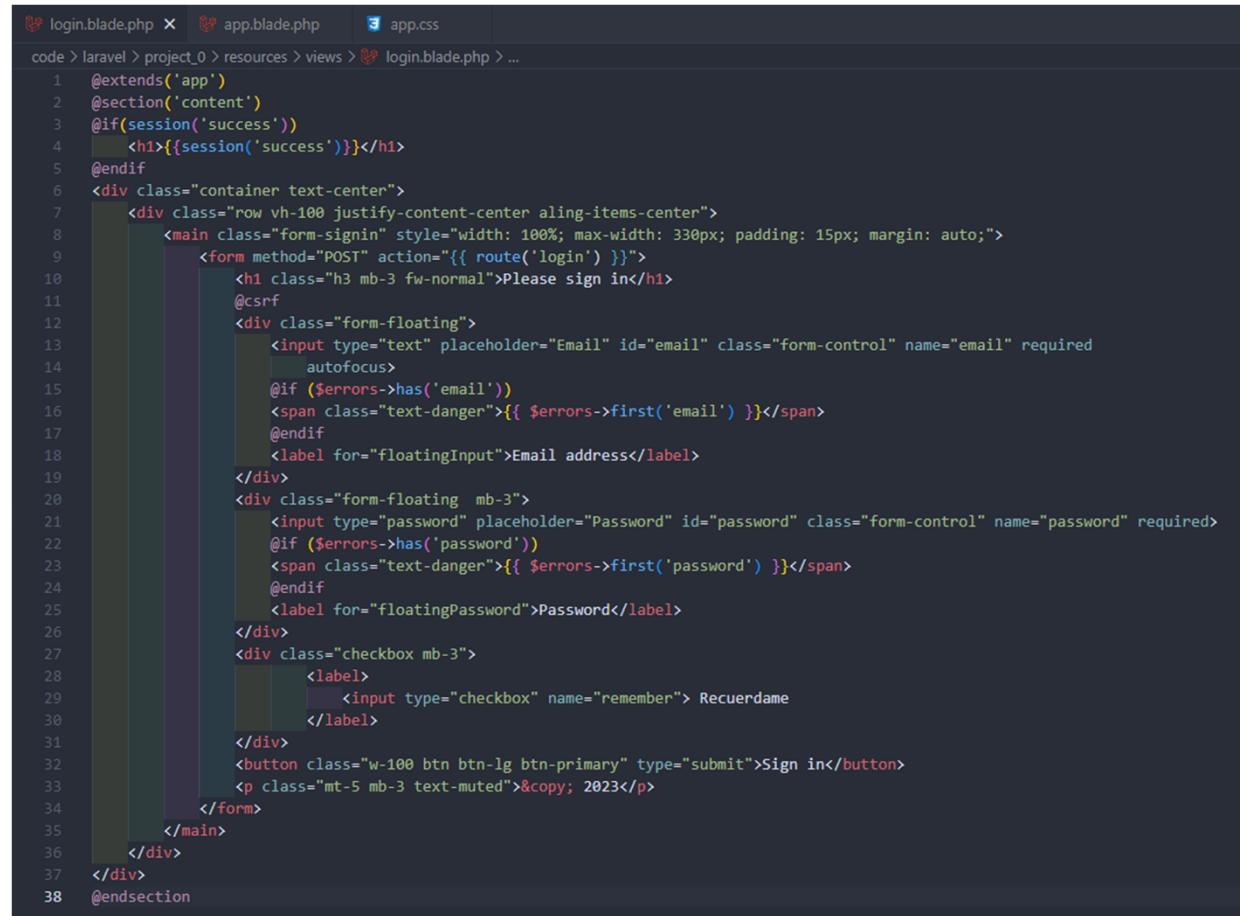

The screenshot shows a code editor with a dark theme displaying a Blade template file named `login.blade.php`. The file is part of a Laravel project, as indicated by the file path in the top bar: `code > laravel > project_0 > resources > views > login.blade.php`. The code itself is a form for user authentication:

```
1  @extends('app')
2  @section('content')
3  @if(session('success'))
4      <h1>{{session('success')}}</h1>
5  @endif
6  <div class="container text-center">
7      <div class="row vh-100 justify-content-center align-items-center">
8          <main class="form-signin" style="width: 100%; max-width: 330px; padding: 15px; margin: auto;">
9              <form method="POST" action="{{ route('login') }}>
10                 <h1 class="mb-3 fw-normal">Please sign in</h1>
11                 @csrf
12                 <div class="form-floating">
13                     <input type="text" placeholder="Email" id="email" class="form-control" name="email" required
14                         autofocus>
15                     @if ($errors->has('email'))
16                         <span class="text-danger">{{ $errors->first('email') }}</span>
17                     @endif
18                     <label for="floatingInput">Email address</label>
19                 </div>
20                 <div class="form-floating mb-3">
21                     <input type="password" placeholder="Password" id="password" class="form-control" name="password" required>
22                     @if ($errors->has('password'))
23                         <span class="text-danger">{{ $errors->first('password') }}</span>
24                     @endif
25                     <label for="floatingPassword">Password</label>
26                 </div>
27                 <div class="checkbox mb-3">
28                     <label>
29                         <input type="checkbox" name="remember"> Recuerdame
30                     </label>
31                 </div>
32                 <button class="w-100 btn btn-lg btn-primary" type="submit">Sign in</button>
33                 <p class="mt-5 mb-3 text-muted">&copy; 2023</p>
34             </form>
35         </main>
36     </div>
37 </div>
38 @endsection
```

Bootstrap en Laravel - login

The image displays two screenshots of a web browser showing a Laravel application's login interface.

Screenshot 1: Login Page

A screenshot of a browser window titled "Laravel". The address bar shows the URL `127.0.0.1:8000`. The page content is a "Please sign in" form. It contains two input fields: "Email address" and "Password", both with placeholder text. Below the fields is a checkbox labeled "Recuerdame". A large blue button at the bottom is labeled "Sign in". At the bottom of the page, there is a small copyright notice: "© 2023".

Screenshot 2: Logged-in Page

A screenshot of a browser window titled "Laravel". The address bar shows the URL `127.0.0.1:8000/logados`. The page content displays the message "USUARIO LOGADO" in a large, bold, black font.

Referencias

- *Laravel - the PHP framework for web artisans.* (n.d.). Laravel.com. Retrieved December 14, 2023, from <https://laravel.com/>
- Ruiz, D. by D., & Web y Móvil Freelance, D. (2023, April 18). Cómo hacer Login en Laravel. *dCreations by Daniel Ruiz | Desarrollador Web y Móvil Freelance*. <https://dcreations.es/blog/laravel/como-hacer-login-en-laravel>
- Savani, H. (2023, November 5). *How to install bootstrap 5 in laravel 10?* Itsolutionstuff.com. <https://www.itsolutionstuff.com/post/how-to-install-bootstrap-5-in-laravel-10example.html>