



useQuery<any>(QUERY)



Redeclaring types manually

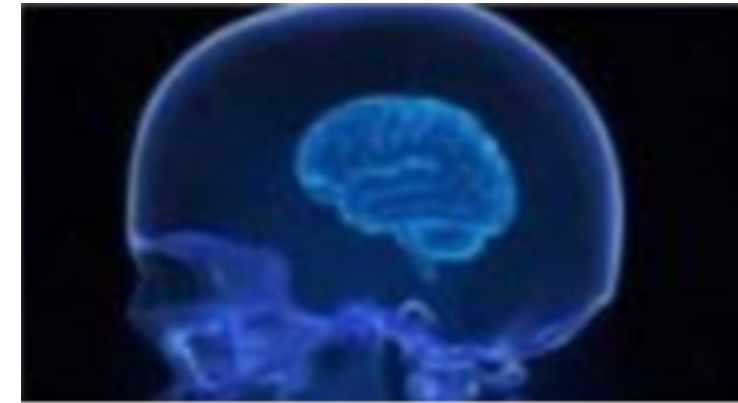

useQuery<any>(QUERY)

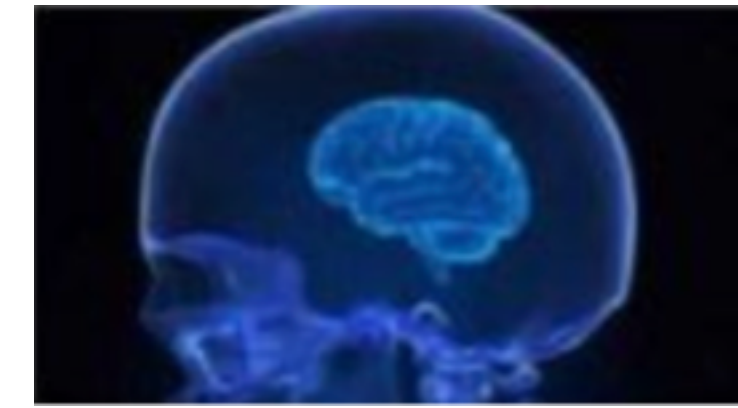

Redeclaring types manually



CountryList.tsx X

```
1  import { gql, useQuery } from '@apollo/client';
2  import { Loader, ErrorScreen, CountryCard } from '../components';
3
4  const COUNTRY_LIST = gql`
5    query CountryList {
6      Execute Query
7      countries: Country {
8        _id
9        name
10       subregion {
11         _id
12         name
13       }
14     }
15   `;
16
17  type CountryList = {
18    countries: {
19      _id: string;
20      name: string;
21      subregion: {
22        _id: string;
23        name: string;
24      };
25    }[];
26  };
27
28  const CountriesPage: React.FC = () => {
29    const { data, loading, error } = useQuery<CountryList>(COUNTRY_LIST);
30
31    if (loading) {
32      return <Loader />;
33    }
34
35    if (error) {
```