



Welcome to

# Simulated DDoS Attacks

## breaking the firewall infrastructure

Henrik Kramselund Jereminsen [hkj@zecurity.com](mailto:hkj@zecurity.com) @kramse  

Slides are available as PDF, [kramse@Github](https://github.com/kramse/security-courses/tree/main/simulated-ddos-ripe72.tex)  
`simulated-ddos-ripe72.tex` in the repo `security-courses`

# Contact information



- Henrik Kramselund Jereminsen, internet samurai mostly networks and infosec
- Independent network and security consultant
- Master from the Computer Science Department at the University of Copenhagen, DIKU

- Email: [hik@zecurity.dk](mailto:hik@zecurity.dk)

- Mobile: +45 2026 6000

You are welcome to drop me an email



# What is pentest



A penetration test, informally pen test, is an attack on a computer system that looks for security weaknesses, potentially gaining access to the computer's features and data.[1][2]

Penetration testing is a simulation, with good intentions

People around the world constantly *test your defenses*

Often better to test at planned times

Source: quote from [https://en.wikipedia.org/wiki/Penetration\\_test](https://en.wikipedia.org/wiki/Penetration_test)

# Goal



Don't Panic!

How to create DDoS simulations, tools and process

Some actual experience with doing this


Evaluate how good is this, value



I use and recommend Kali 2.0 Linux as the base for this

# Networks today



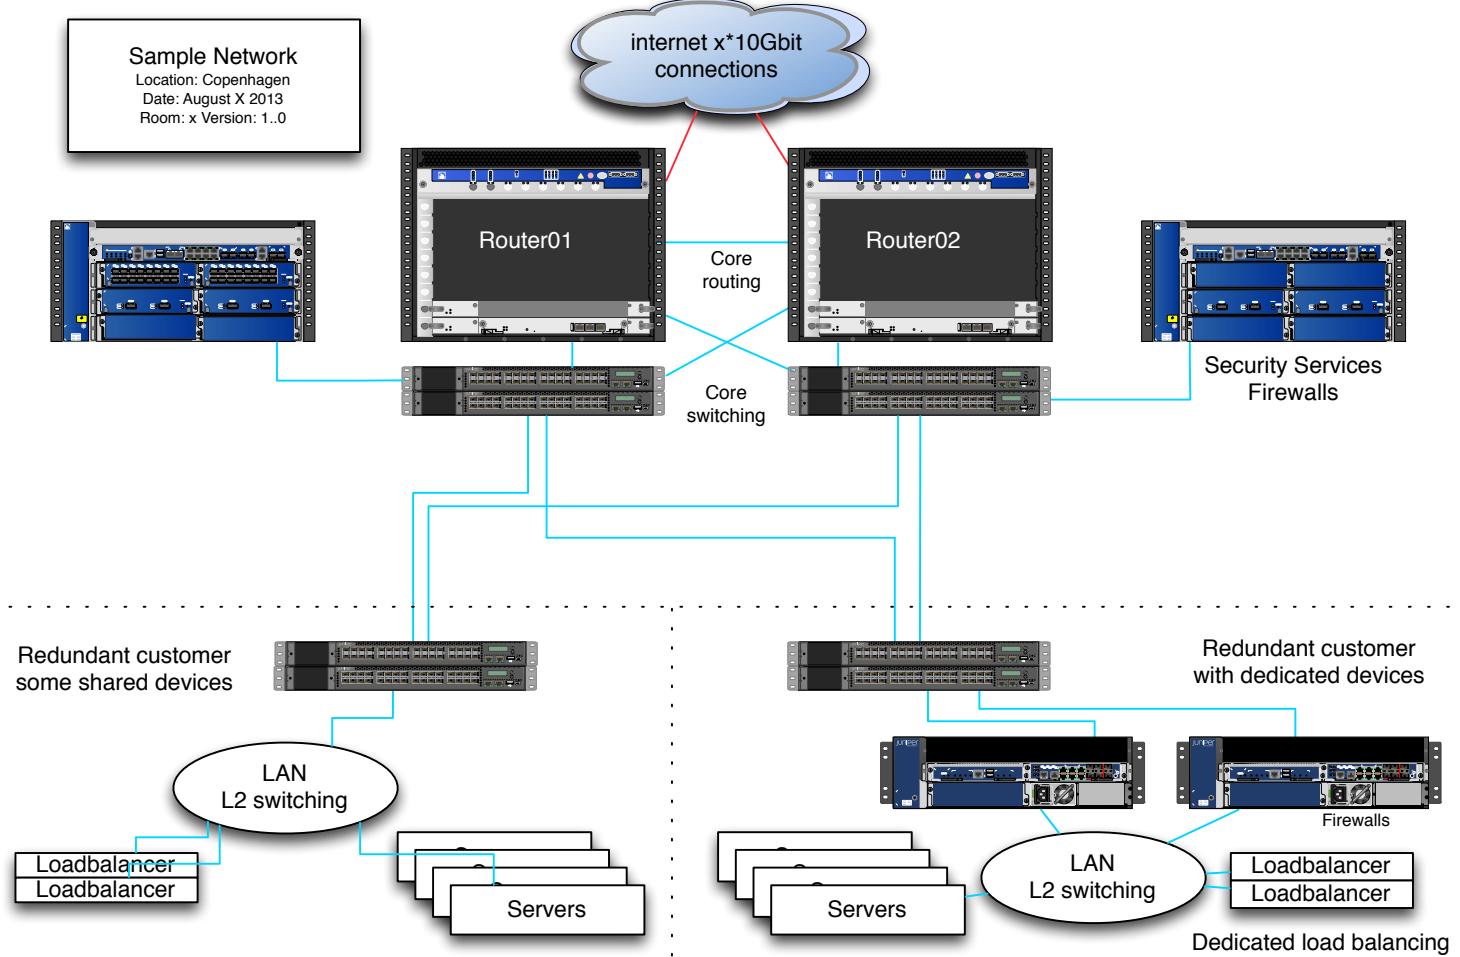

# Kali Linux the new backtrack



The most advanced penetration testing distribution, ever.


From the creators of BackTrack comes Kali Linux, the most advanced and versatile penetration testing distribution ever created. BackTrack has grown far beyond its humble roots as a live CD and has now become a full-fledged operating system. With all this buzz, you might be asking yourself: - What's new ?



Kali <http://www.kali.org/>



BackTrack <http://www.backtrack-linux.org> old name

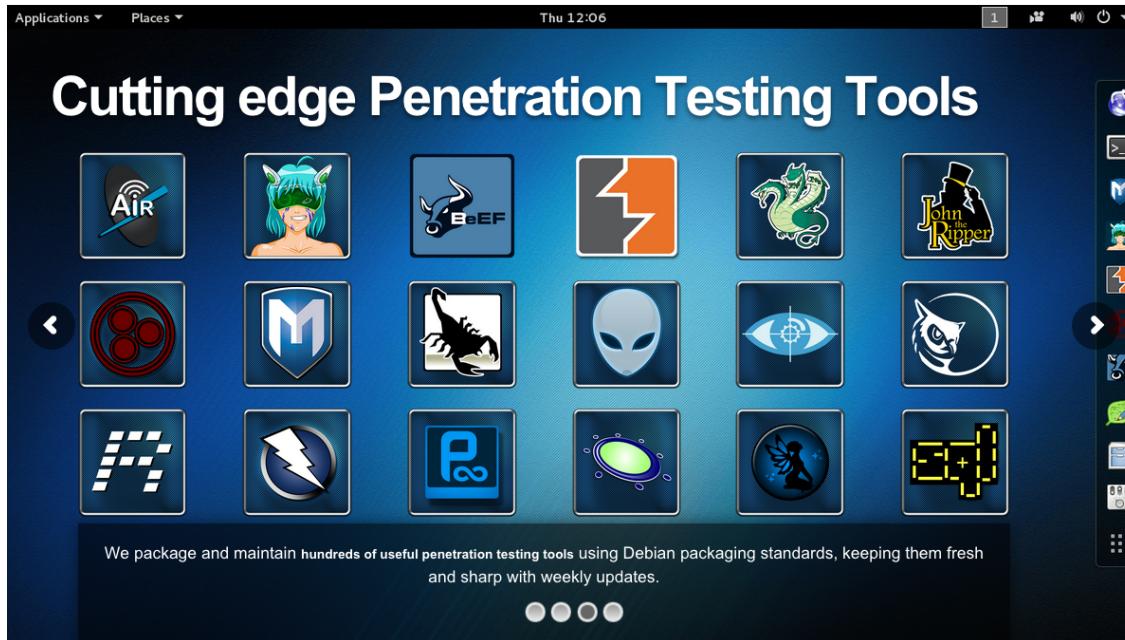

Almost 200.000 youtube videos about "kali hack"

You can learn these tools from their respective home pages:

Like <http://nmap.org>, <http://aircrack-ng.org>



The main site helps with install and VM tools Kali <http://www.kali.org/>


# Testing network the legal issues



**Straffelovens paragraf 263 Stk. 2. Med bøde eller fængsel indtil 1 år og 6 måneder straffes den, der uberettiget skaffer sig adgang til en andens oplysninger eller programmer, der er bestemt til at bruges i et informationssystem.**

- Danish law about hacking
- Please check with your legal department, or be careful
- We **always** contact network between us and the network to be tested
- Be good netizens

# Hackerlab setup

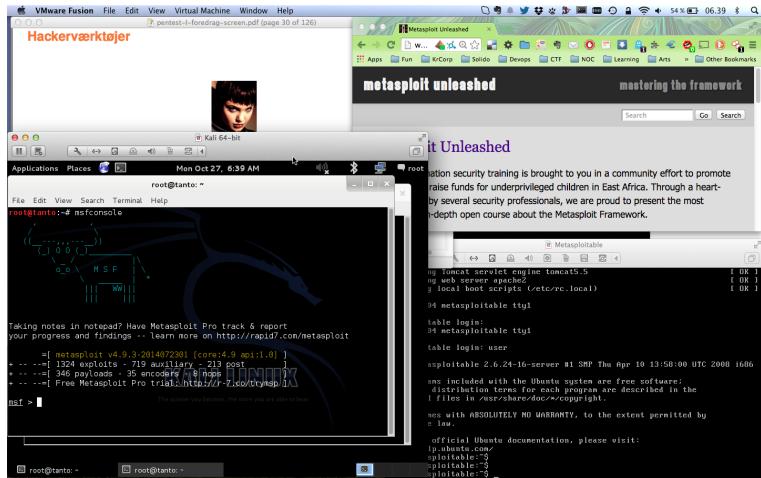

- I recommend getting a hackerlab running on your laptop
- Hardware: modern laptop which has CPU virtualization  
Dont forget to check BIOS settings for virtualization



- Software: your favorite OS: Windows, Mac, Linux
- Virtualization software: VMware, Virtual box, HyperV
- Hacker software: Kali as a Virtual Machine <https://www.kali.org/>



# hping3 packet generator

```
usage: hping3 host [options]
-i --interval  wait (uX for X microseconds, for example -i u1000)
--fast        alias for -i u10000 (10 packets for second)
--faster       alias for -i u1000 (100 packets for second)
--flood        sent packets as fast as possible. Don't show replies.
```

...

hping3 is fully scriptable using the TCL language, and packets can be received and sent via a binary or string representation describing the packets.

- Hping3 packet generator is a very flexible tool to produce simulated DDoS traffic with specific characteristics
- Home page: <http://www.hping.org/hping3.html>
- Source repository <https://github.com/antirez/hping>

My primary DDoS testing tool, easy to get specific rate pps





# t50 packet generator

```
root@cornerstone03:~# t50 -?
T50 Experimental Mixed Packet Injector Tool 5.4.1
Originally created by Nelson Brito <nbrito@sekure.org>
Maintained by Fernando Mercês <fernando@mentebinaria.com.br>
```

Usage: T50 <host> [/CIDR] [options]

Common Options:

```
--threshold NUM      Threshold of packets to send      (default 1000)
--flood              This option supersedes the 'threshold'
```

...

6. Running T50 with '--protocol T50' option, sends ALL protocols sequentially.

```
root@cornerstone03:~# t50 -? | wc -l
264
```

- T50 packet generator, another high speed packet generator can easily overload most firewalls by

producing a randomized traffic with multiple protocols like IPsec, GRE, MIX  
home page: <http://t50.sourceforge.net/resources.html>



Extremely fast and breaks most firewalls when flooding, easy 800k pps/400Mbps

# Process: monitor, attack, break, repeat



- Pre-test: Monitoring setup - from multiple points
- Pre-test: Perform full Nmap scan of network and ports
- Start small, run with delays between packets
- Turn up until it breaks, decrease delay - until using --flood
- Monitor speed of attack on your router interface pps/bandwidth
- Give it maximum speed  
`hping3 --flood -1` and `hping3 --flood -2`
- Have a common chat with network operators/customer to talk about symptoms and things observed



- Any information resulting from testing is good information

Ohh we lost our VPN into the environment, ohh the fw console is dead

# Before testing: Smokeping






# HTTPS check www. [REDACTED]

.26

ROTOOL / TOBI OETIKER

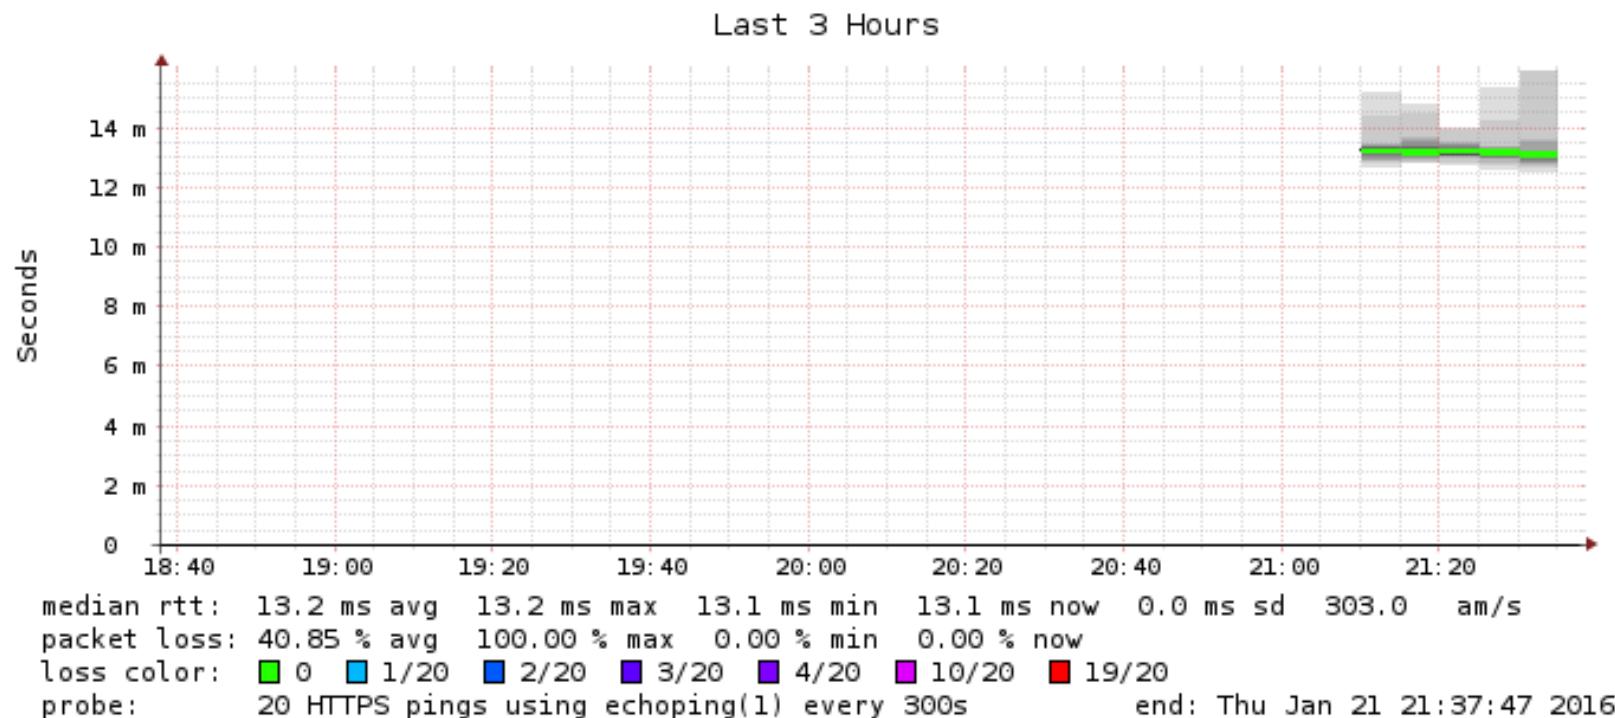

Before DDoS testing use Smokeping software



# Before testing: Pingdom



Last 24 hours ▾




Probe filter ▾



## DDoS test

type: HTTP, host: www.████████.dk

Edit check

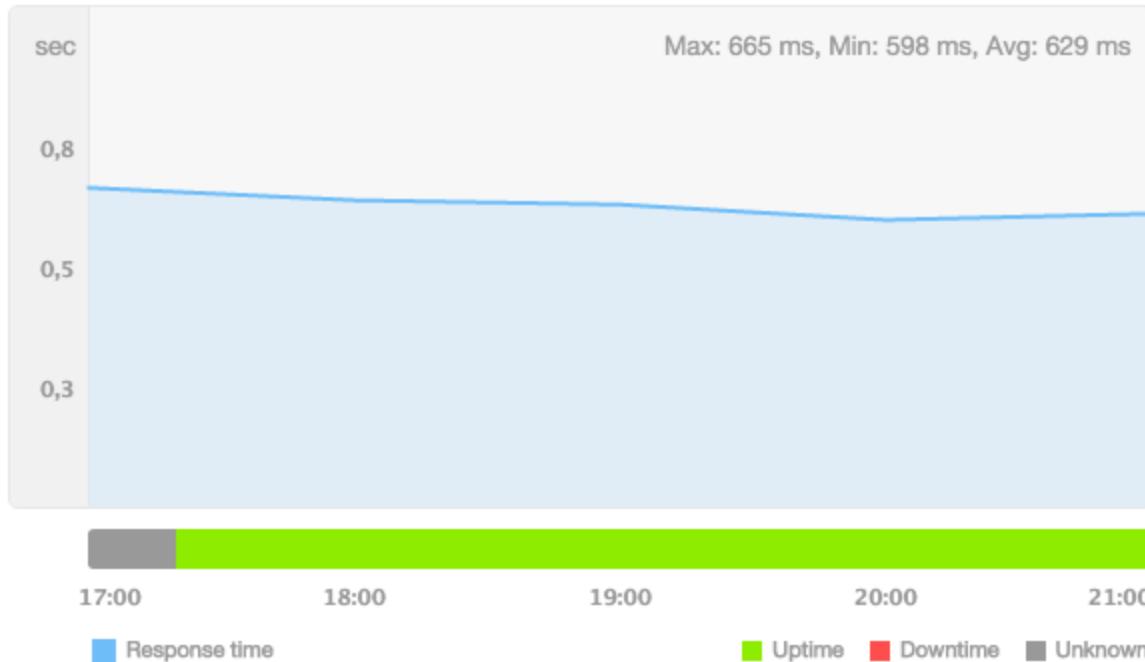

### DOWNTIME

None

(0 outages)

### UPTIME

100.00%

Another external monitoring from Pingdom.com

# Running full port scan on network



```
# export CUST_NET="192.0.2.0/24"  
# nmap -p 1-65535 -A -oA full-scan $CUST_NET
```

Performs a full port scan of the network, all ports

Saves output in "all formats" normal, XML, and grepable formats

Goal is to enumerate the ports that are allowed through the network.

Note: This command is pretty harmless, if something dies, then it is  
*vulnerable to normal traffic* - and should be fixed!

# Running Attacks with hping3



```
# export CUST_IP=192.0.2.1
# date;time hping3 -q -c 1000000 -i u60 -S -p 80 $CUST_IP

# date;time hping3 -q -c 1000000 -i u60 -S -p 80 $CUST_IP
Thu Jan 21 22:37:06 CET 2016
HPING 192.0.2.1 (eth0 192.0.2.1): S set, 40 headers + 0 data bytes

--- 192.0.2.1 hping statistic ---
1000000 packets transmitted, 999996 packets received, 1% packet loss
round-trip min/avg/max = 0.9/7.0/1005.5 ms

real 1m7.438s
user 0m1.200s
sys 0m5.444s
```

Dont forget to do a killall hping3 when done ☺



# Recommendations During Test



Run each test for at least 5 minutes, or even 15 minutes

Some attacks require some build-up before resource run out

Take note of any change in response, higher latency, lost probes

If you see a change, then re-test using the same parameters, or a little less first

We want to know the approximate level where it breaks

If you want to change environment, then wait until all scenarios tested

# Comparable to real DDoS?



Tools are simple and widely available but are they actually producing same result as high-powered and advanced criminal botnets. We can confirm that the attack delivered in this test is, in fact, producing the traffic patterns very close to criminal attacks in real-life scenarios.

- We can also monitor logs when running a single test-case
- Gain knowledge about supporting infrastructure
- Can your syslog infrastructure handle 800.000 events in < 1 hour?

# Experiences from testing



How much bandwidth can big danish companies handle?

- A) 10-100Mbps
- B) 100Mbps -1Gbit
- C) Up to 5Gbit easily

How much abuse in pps can big danish companies handle?

- A) 10.000 - 50.000 pps
- B) 50 - 500k pps
- C) Up to 5 million pps

# Running the tools



A basic test would be:

- TCP SYN flooding
- TCP other flags, PUSH-ACK, RST, ACK, FIN
- ICMP flooding
- UDP flooding
- Spoofed packets src=dst=target ☺
- Small fragments
- Bad fragment offset



- Bad checksum
- Be creative
- Mixed packets - like t50 --protocol T50
- Perhaps esoteric or unused protocols, GRE, IPSec



# Test-cases / Scenarios

The minimal run contains at least these:

- SYN flood: hping3 -q -c 1000000 -i u60 -S -p 80 \$CUST\_IP &
- SYN+ACK: hping3 -q -c 1000000 -i u60 -S -A -p 80 \$CUST\_IP &
- ICMP flood: hping3 -q -c --flood -1 \$CUST\_IP &
- UDP flood: hping3 -q -c --flood -1 \$CUST\_IP &

Vary the speed using the packet interval -i u60 up/down

Use flooding with caution, runs max speeeeeeeeeeed ☺

TCP testing use a port which is allowed through the network, often 80/443

Focus on attacks which are hard to block, example TCP SYN must be allowed in



Also if you found devices like routers in front of environment

```
hping3 -q -c 1000000 -i u60 -S -p 22 $ROUTER_IP
```

```
hping3 -q -c 1000000 -i u60 -S -p 179 $ROUTER_IP
```

# Test-cases / Scenarios, continued Spoof Source



Spoofed packets src=dst=target ☺

Flooding with spoofed packet source, within customer range

-a --spoof hostname

Use this option in order to set a fake IP source address, this option ensures that target will not gain your real address.

```
hping3 -q --flood -p 80 -S -a $CUST_IP $CUST_IP
```

Preferably using a test-case you know fails, to see effect

Still amazed how often this works

BCP38 anyone!

# Test-cases / Scenarios, continued Small Fragments



Using the built-in option -f for hping


-f --frag

Split packets in more fragments, this may be useful in order to test IP stacks fragmentation performance and to test if some packet filter is so weak that can be passed using tiny fragments (anachronistic). Default '**virtual mtu**' is 16 bytes. see also --mtu option.

```
hping3 -q --flood -p 80 -S -f $CUST_IP
```


Similar process with bad checksum and Bad fragment offset

# Rocky Horror Picture Show - 1

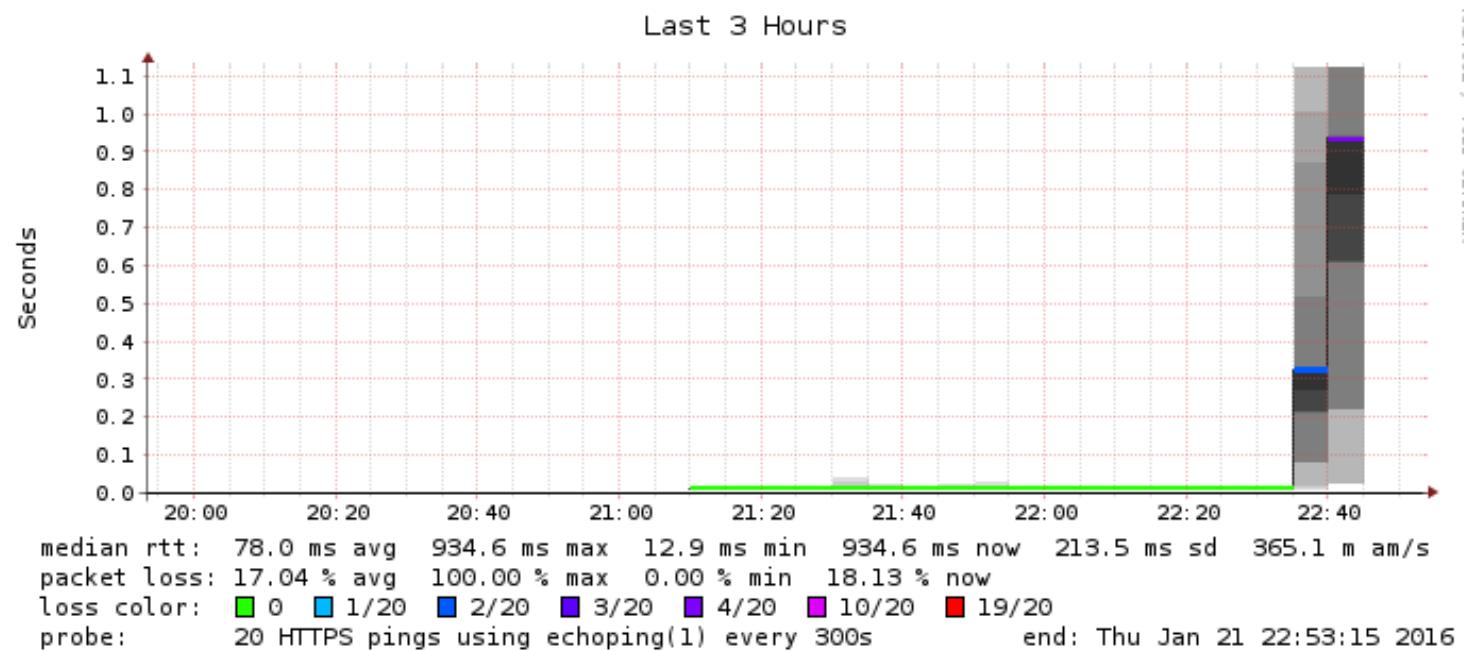

Really does it break from 50.000 pps SYN attack?

# Rocky Horror Picture Show - 2

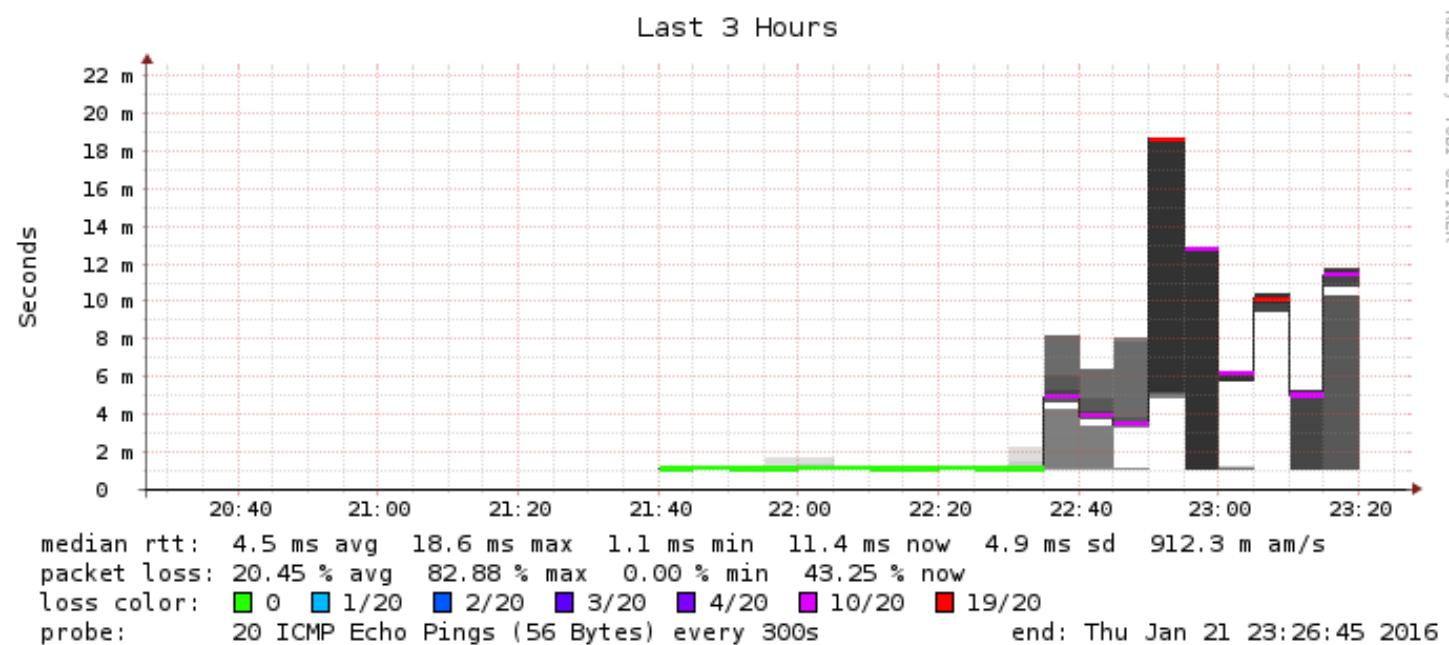

Oh no 500.000 pps UDP attacks work?

# Rocky Horror Picture Show - 3




Oh no spoofing attacks work?



RRDTOOL / TOBI DETIKER

Last 3 Hours

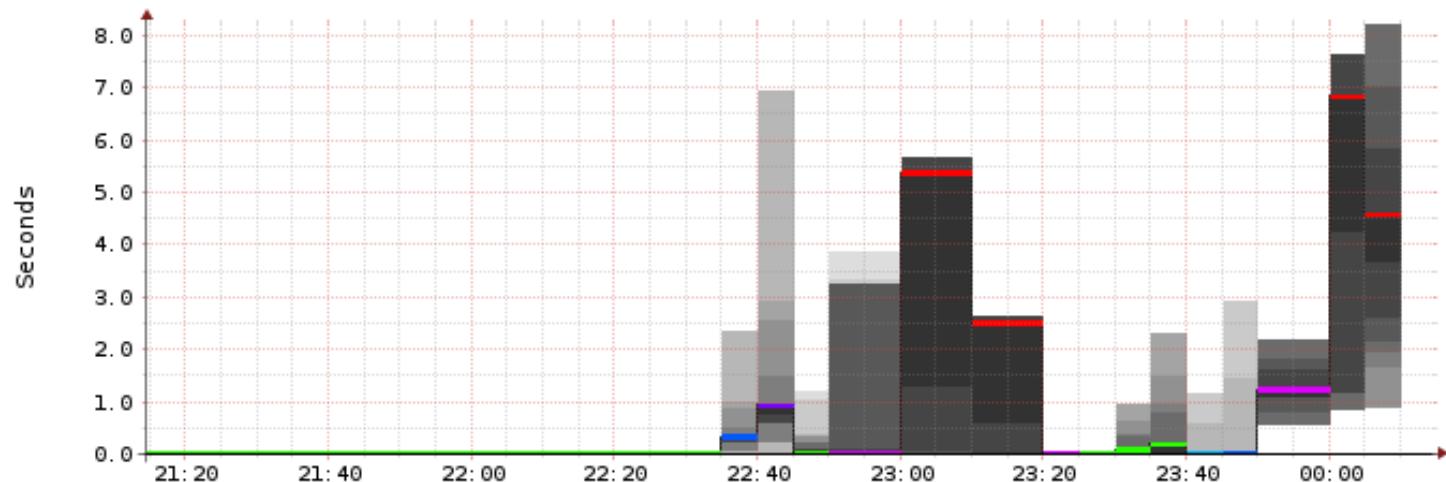

# Experiences from testing



How much bandwidth can big danish companies handle!

- B) **100Mbps -1Gbit**

How much abuse in pps can big danish companies handle!

- B) **50.000 - 500k pps** TCP attacks
- B) **500.000 - 1mill pps** UDP or ICMP attacks
- Ohhh and often we can spoof using their addresses in the first test


Even the DDoS protection services are a bit too small, can handle perhaps only 10G

and also multiple times admins lost access to network, VPN, log overflow etc.



Note: attackers can send full 10Gbit 14mill pps from Core i7 with 3 cores ...

# Demo time

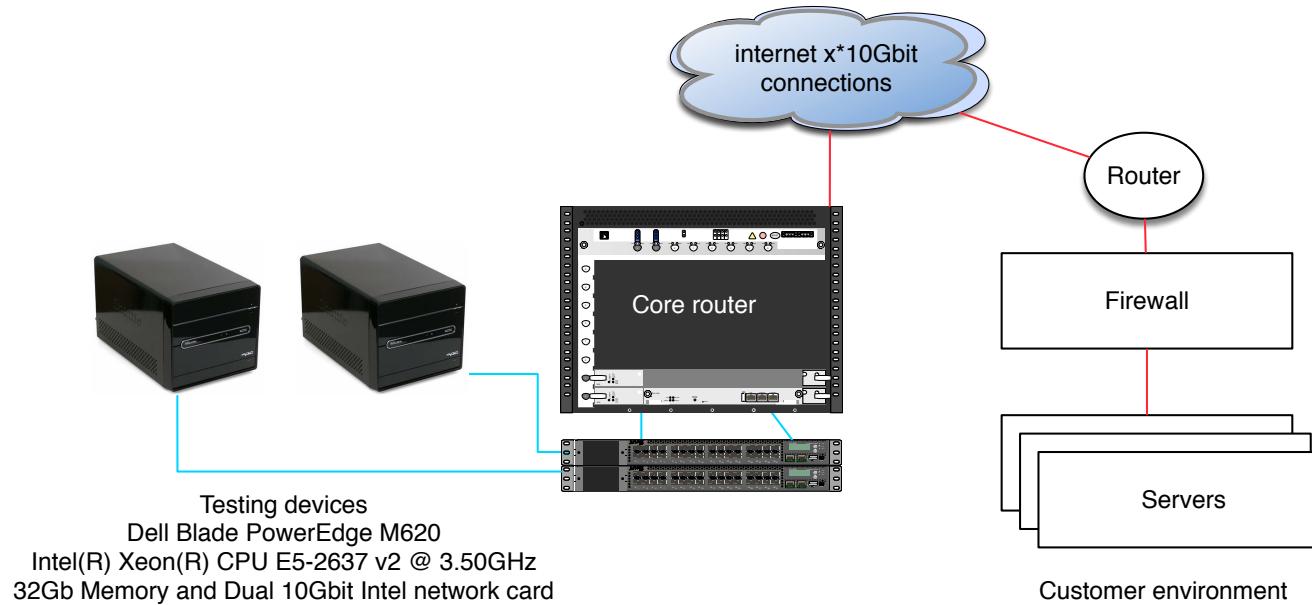

I will show the setup on my laptop while doing DDoS testing



- Setup terminals: Kali and router
- Browser monitoring: Pingdom, Smokeping and tab with target url
- Some chat: IRC - some random channel

Run some tests against my target, personal homepage

# Improvements seen after testing



Turning off unneeded features - free up resources

Tuning sessions, max sessions src / dst

Tuning firewalls, max sessions in half-open state, enabling services

Tuning network, drop spoofed src from inside net ☺

Tuning network, can follow logs, manage network during attacks

...

And organisation has better understanding of DDoS challenges

Including vendors, firewall consultants, ISPs etc.



After tuning of **existing devices/network** improves results 10-100 times


# Conclusion



You really should try testing

Investigate your existing devices  
all of them, RTFM, upgrade firmware


Choose which devices does which  
part - discard early to free resources  
for later devices to dig deeper

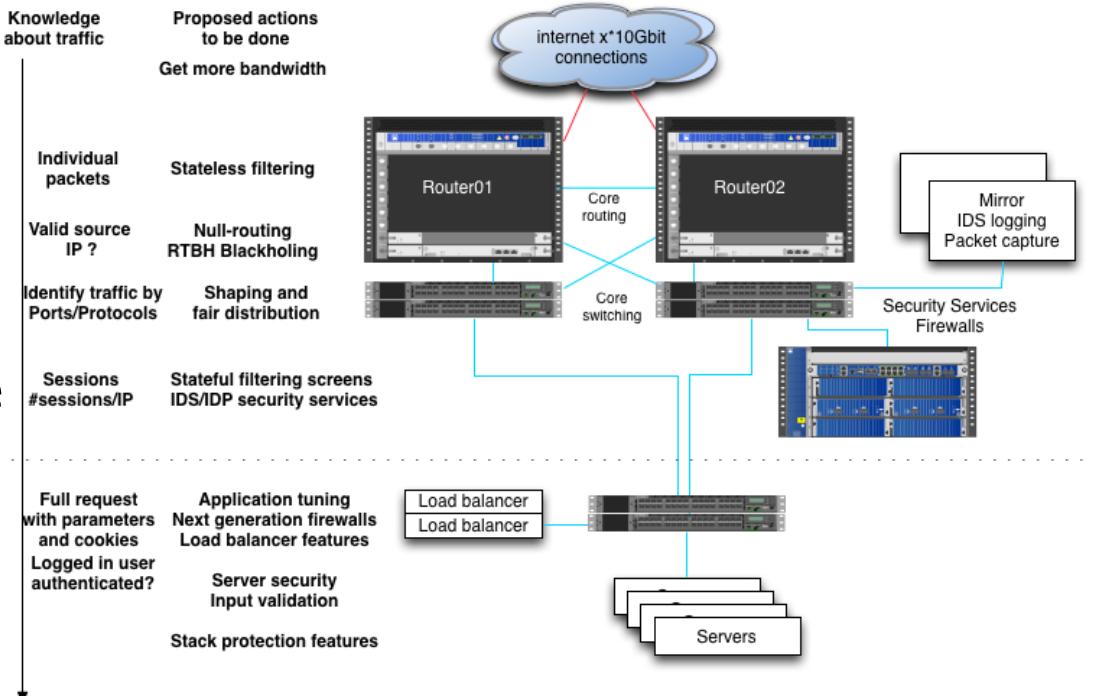

And dont forget that DDoS testing is as much a firedrill for the organisation



# More application testing

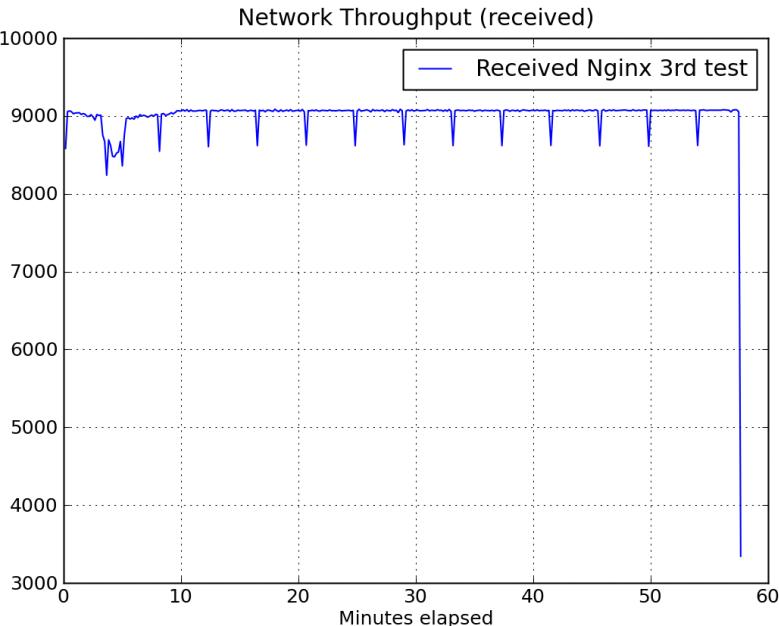

We covered only lower layers - but helpful layer 7 testing programs exist

Tsung can be used to stress HTTP, WebDAV, SOAP, PostgreSQL, MySQL, LDAP and Jabber/XMPP servers <http://tsung.erlang-projects.org/>



# Questions?



Henrik Kramselund Jereminsen [hkj@zecurity.com](mailto:hkj@zecurity.com) @kramse  

You are always welcome to send me questions later via email

Email: [hlk@zecurity.dk](mailto:hlk@zecurity.dk)      Mobile: +45 2026 6000


# Extras if needed or questions arise



# Demo network



Intel Core i7 - 960 (3.2GHz)  
16Gb memory Gbit + 10G NIC

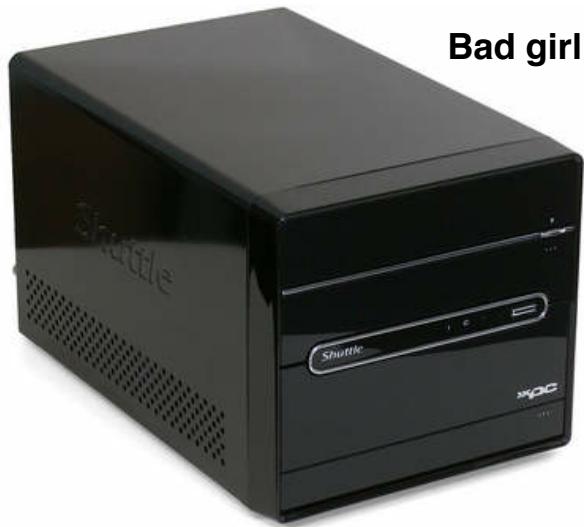


Juniper SRX220H  
Firewall performance (max) 950 Mbps  
Maximum concurrent sessions 96K



Bad girl!

Nice Web  
server Nginx

Beagleboard Black  
Processor: AM335x 1GHz ARM®  
Cortex-A8 512MB DDR3L

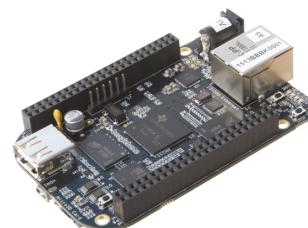


I use this when doing on-site demos



# Defense in depth - multiple layers of security



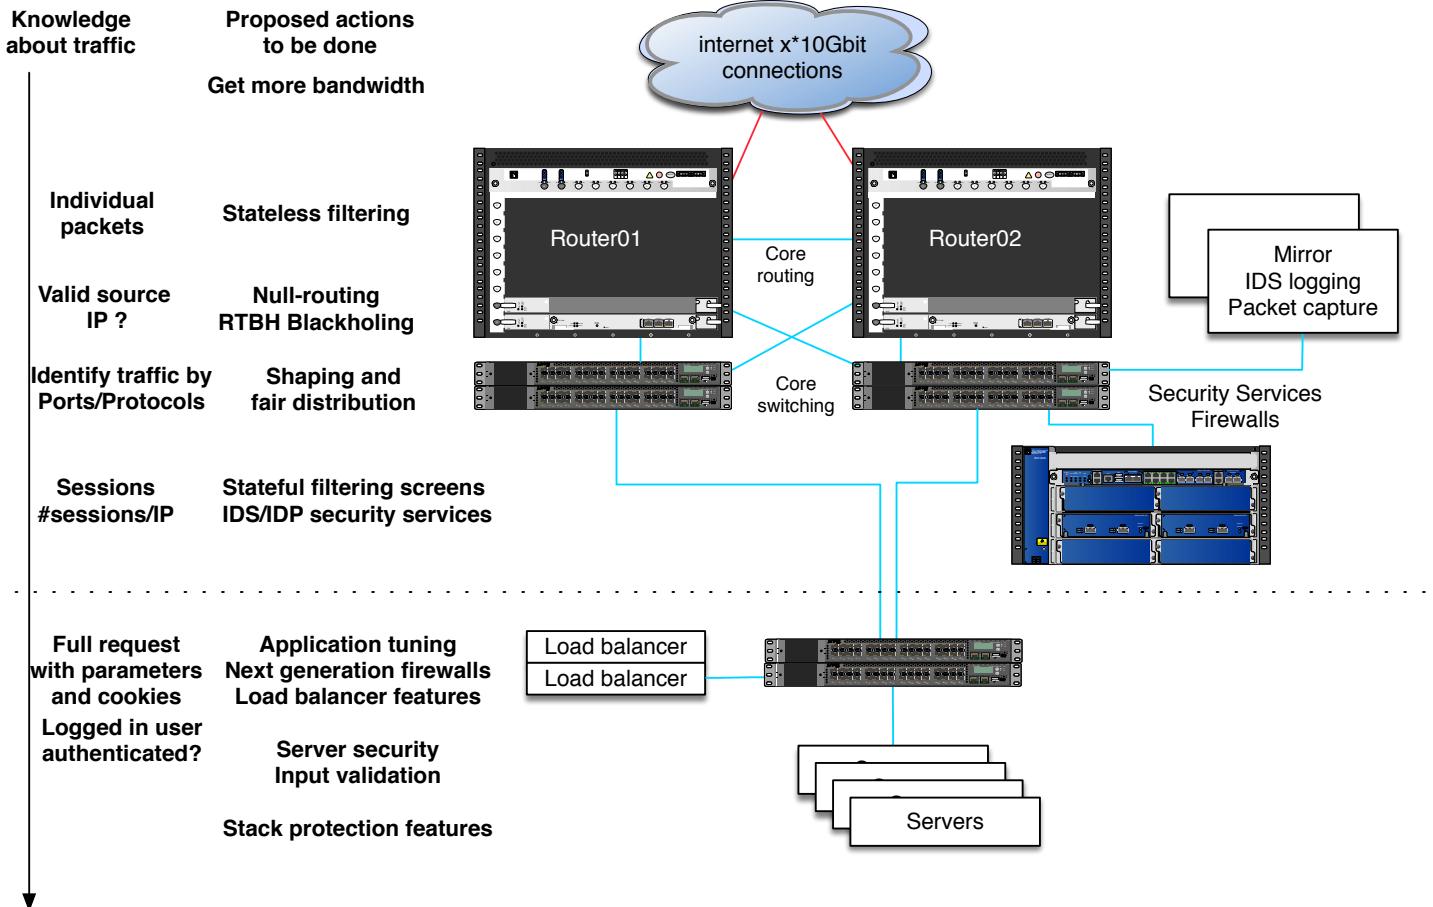


# DDoS traffic before filtering






Level3 CPH

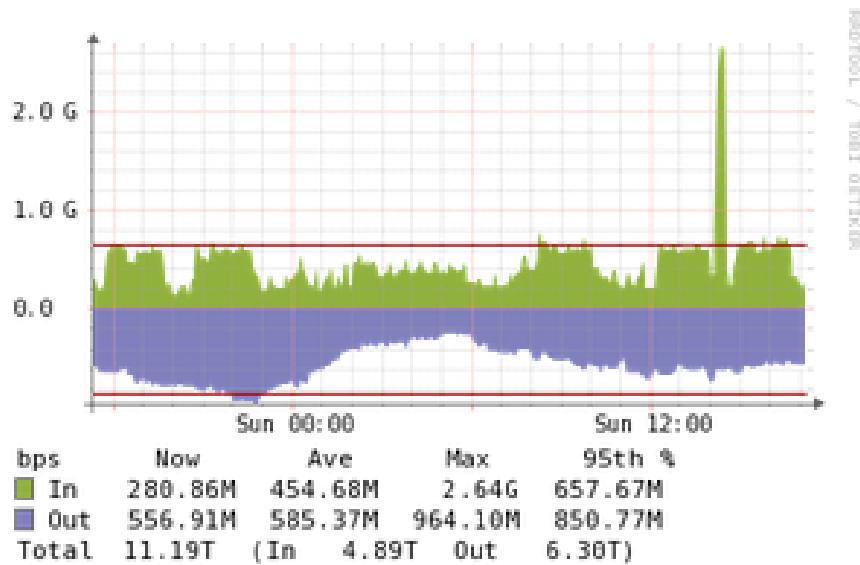


NGDC

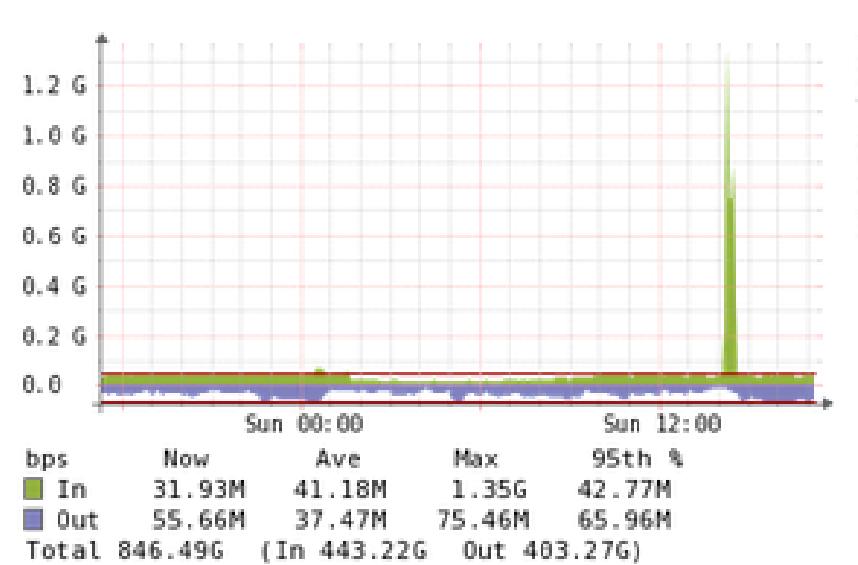

Only two links shown, at least 3Gbit incoming for this single IP

# DDoS traffic after filtering

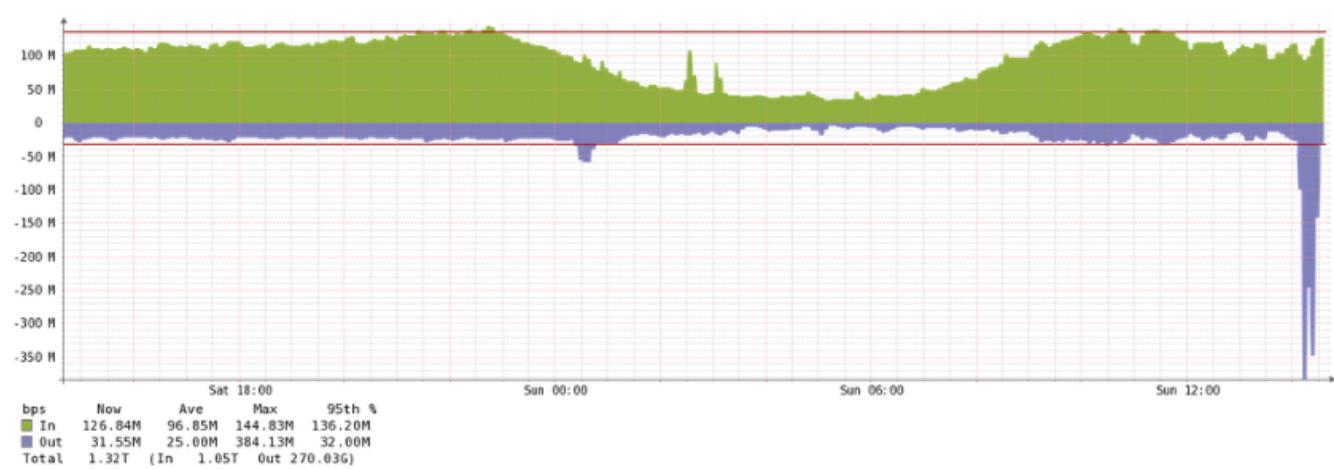

Link toward server (next level firewall actually) about 350Mbit outgoing

# Stateless firewall filter throw stuff away



```
hlk@MX-CPH-02> show configuration firewall filter all | no-more
/* This is a static sample, perhaps better to use BGP flowspec and RTBH */
term edgeblocker {
    from {
        source-address {
            84.180.xxx.173/32;
...
            87.245.xxx.171/32;
        }
        destination-address {
            91.102.91.16/28;
        }
        protocol [ tcp udp icmp ];
    }
    then {
        count edge-block;
        discard;
    }
}
```

}{  
}



Hint: can also leave out protocol and then it will match all protocols

# Stateless firewall filter limit protocols



```
term limit-icmp {  
    from {  
        protocol icmp;  
    }  
    then {  
        policer ICMP-100M;  
        accept;  
    }  
}  
term limit-udp {  
    from {  
        protocol udp;  
    }  
    then {  
        policer UDP-1000M;  
        accept;  
    }  
}
```

Routers have extensive Class-of-Service (CoS) tools today



# Strict filtering for some servers, still stateless!



```
term some-server-allow {  
    from {  
        destination-address {  
            109.238.xx.0/xx;  
        }  
        protocol tcp;  
        destination-port [ 80 443 ];  
    }  
    then accept;  
}  
  
term some-server-block-unneeded {  
    from {  
        destination-address {  
            109.238.xx.0/xx;  
        }  
        protocol-except icmp;  
    }  
}
```

```
then {  
    discard;  
}  
}
```



Wut - no UDP, yes UDP service is not used on these servers

# Firewalls - screens, IDS like features



When you know regular traffic you can decide:

```
hlk@srx-kas-05# show security screen ids-option untrust-screen
icmp {
    ping-death;
}
ip {
    source-route-option;
    tear-drop;
}
tcp {    Note: UDP flood setting also exist
    syn-flood {
        alarm-threshold 1024;
        attack-threshold 200;
        source-threshold 1024;
        destination-threshold 2048;
        timeout 20;
```

```
 }  
 land;  
 }
```



Always select your own settings YMMV