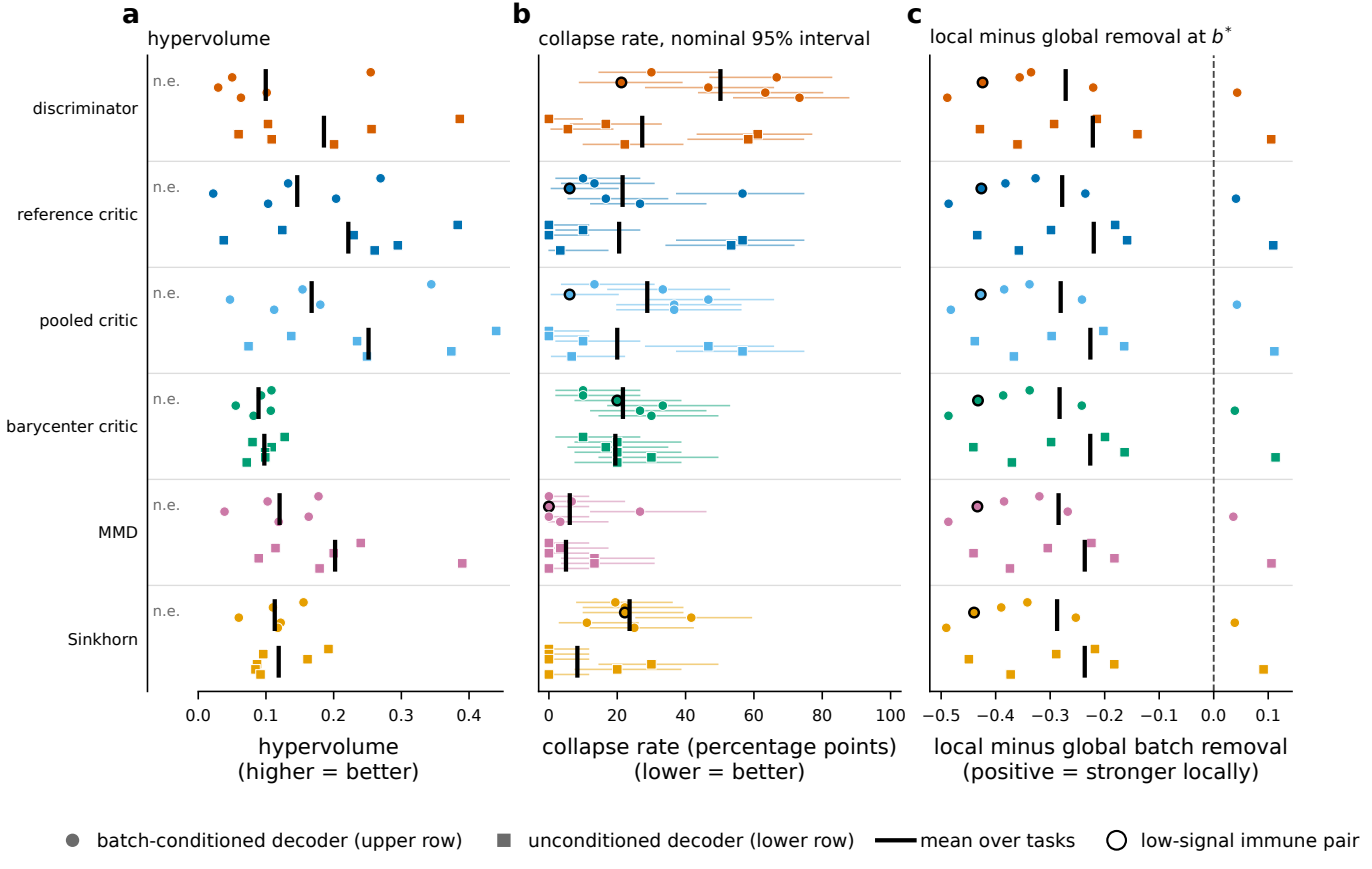

a
hypervolume
b
collapse rate, nominal 95% interval
c
local minus global removal at b^*
discriminator
reference critic
pooled critic
barycenter critic
MMD
Sinkhorn
n.e.
0.0
0.1
0.2
0.3
0.4
hypervolume
(higher = better)
0
20
40
60
80
100
collapse rate (percentage points)
(lower = better)
−0.5
−0.4
−0.3
−0.2
−0.1
0.0
0.1
local minus global batch removal
(positive = stronger locally)
batch-conditioned decoder (upper row)
unconditioned decoder (lower row)
mean over tasks
low-signal immune pair