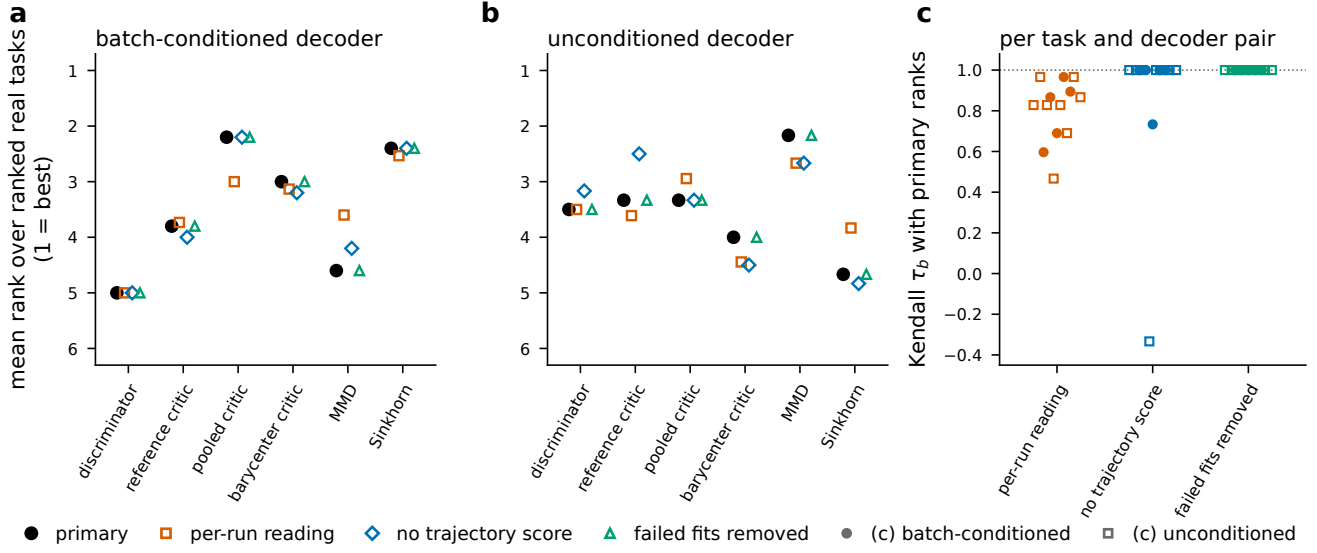

a
batch-conditioned decoder
mean rank over ranked real tasks
(1 = best)
1
2
3
4
5
6
discriminator
reference critic
pooled critic
barycenter critic
MMD
Sinkhorn
b
unconditioned decoder
1
2
3
4
5
6
discriminator
reference critic
pooled critic
barycenter critic
MMD
Sinkhorn
c
per task and decoder pair
Kendall τ_b with primary ranks
1.0
0.8
0.6
0.4
0.2
0.0
−0.2
−0.4
per-run reading
no trajectory score
failed fits removed
primary
per-run reading
no trajectory score
failed fits removed
(c) batch-conditioned
(c) unconditioned