

Stream Manager · Interfaces

Initial cut · five interfaces and who calls whom

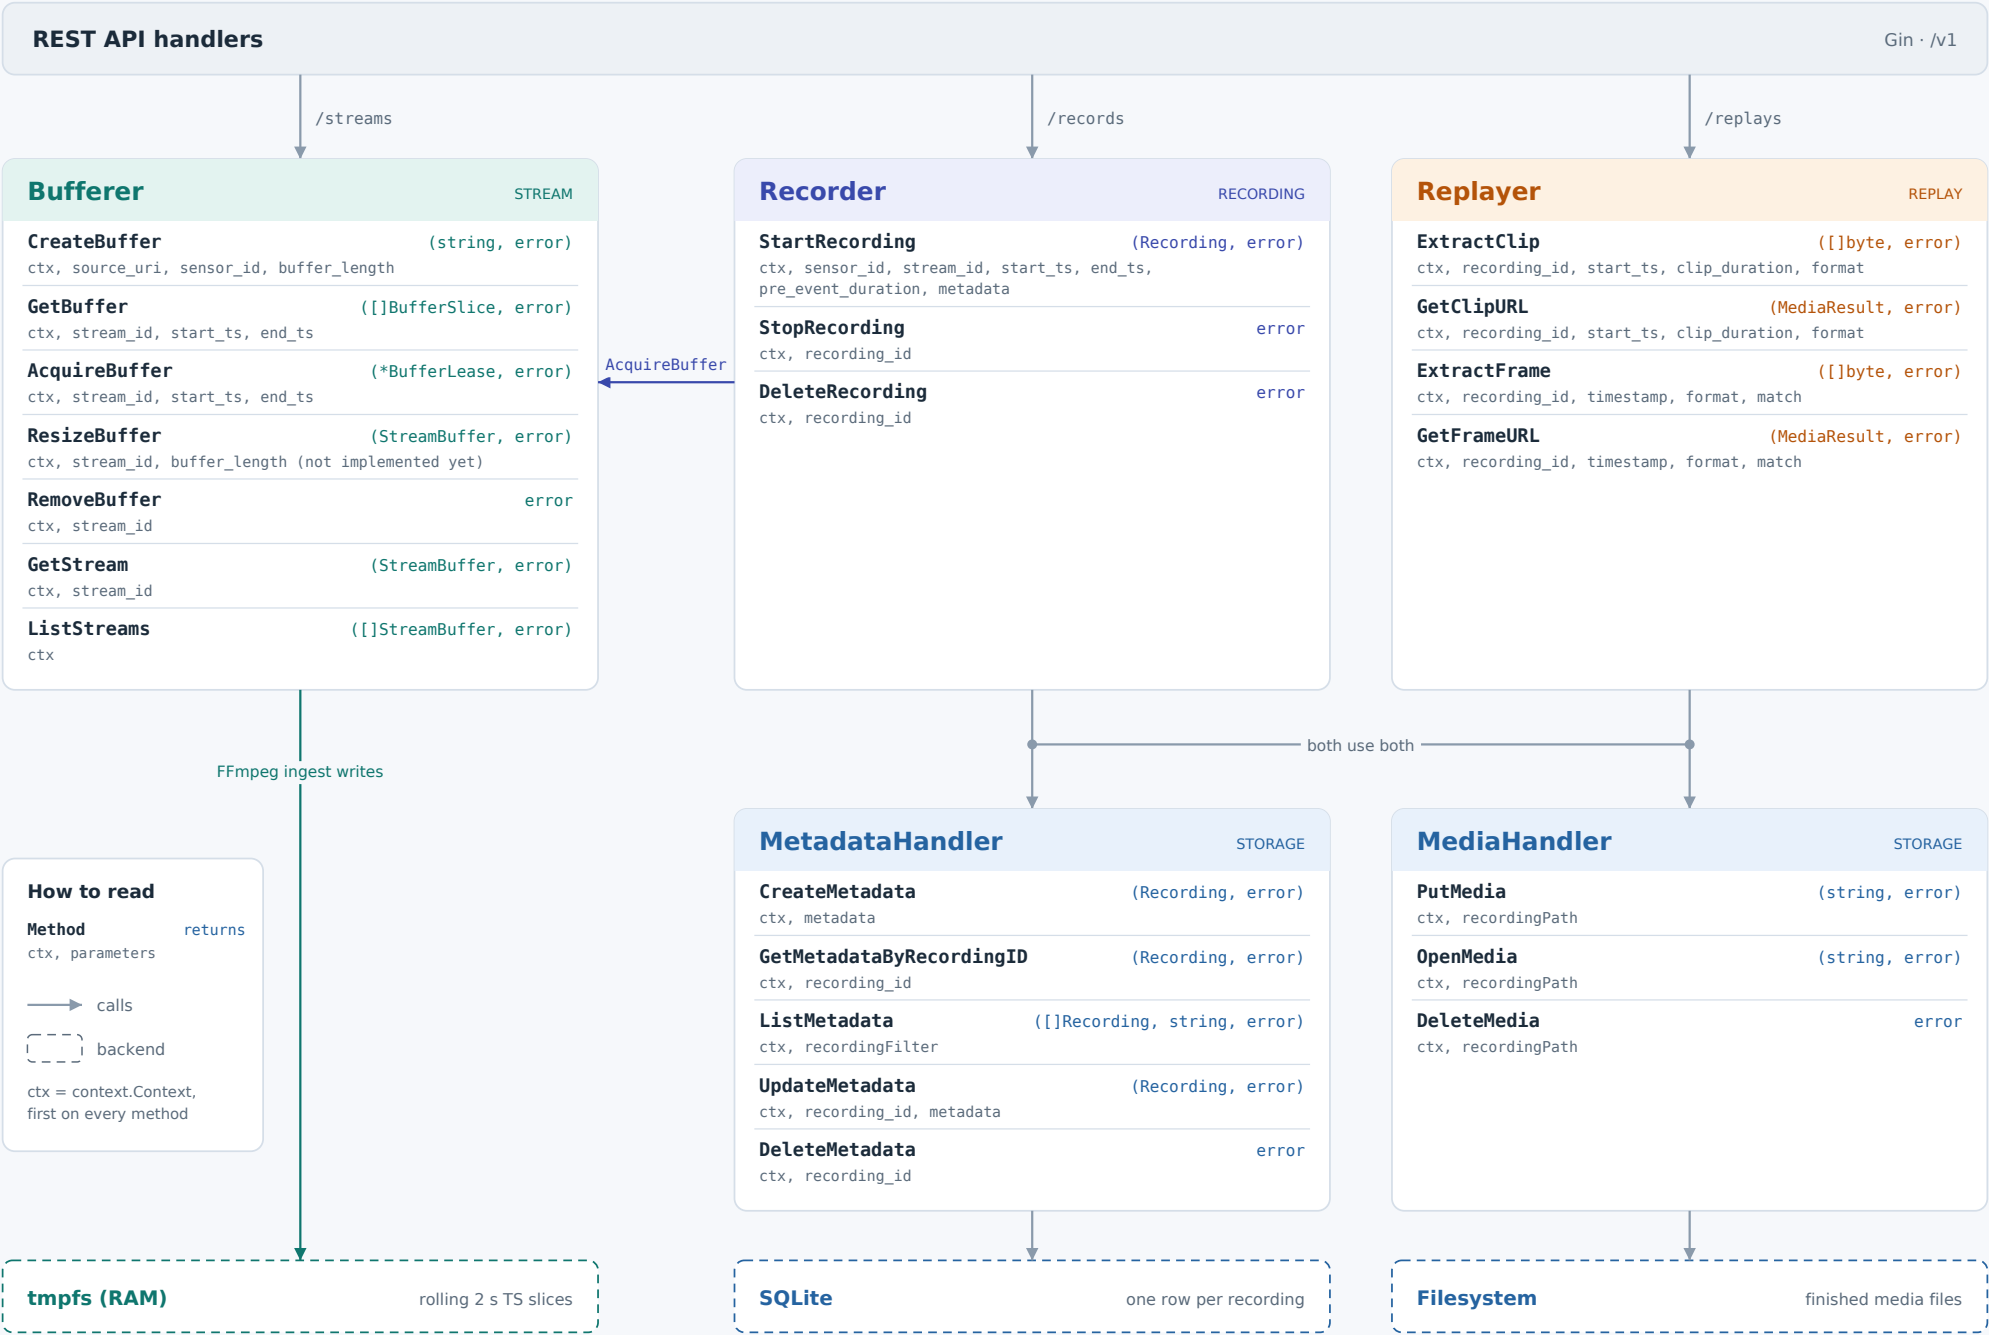


Figure 1 · API handlers call Bufferer, Recorder and Replayer; storage goes through MetadataHandler and MediaHandler.


In brief

- Bufferer keeps the live buffer; Recorder leases slices with AcquireBuffer; Replayer serves clips and frames.
- CreateBuffer takes an optional buffer_length (5-300 s, 0 = default 30 s); ResizeBuffer is not implemented yet.
- Recorder and Replayer save and read through MetadataHandler (SQLite) and MediaHandler (files).
- Every method takes ctx first, so slow work can be cancelled.


Stream Manager · Data Models

Initial cut · the shapes that move between packages


RECORDING

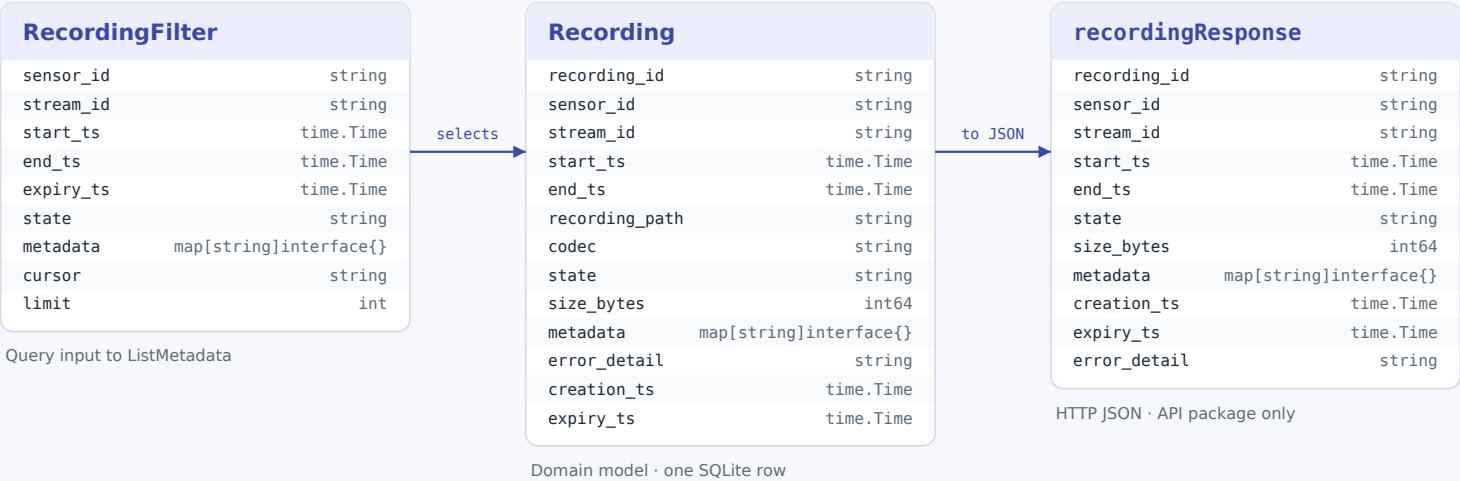


STATES

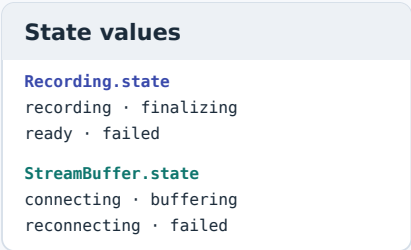

STREAM BUFFER

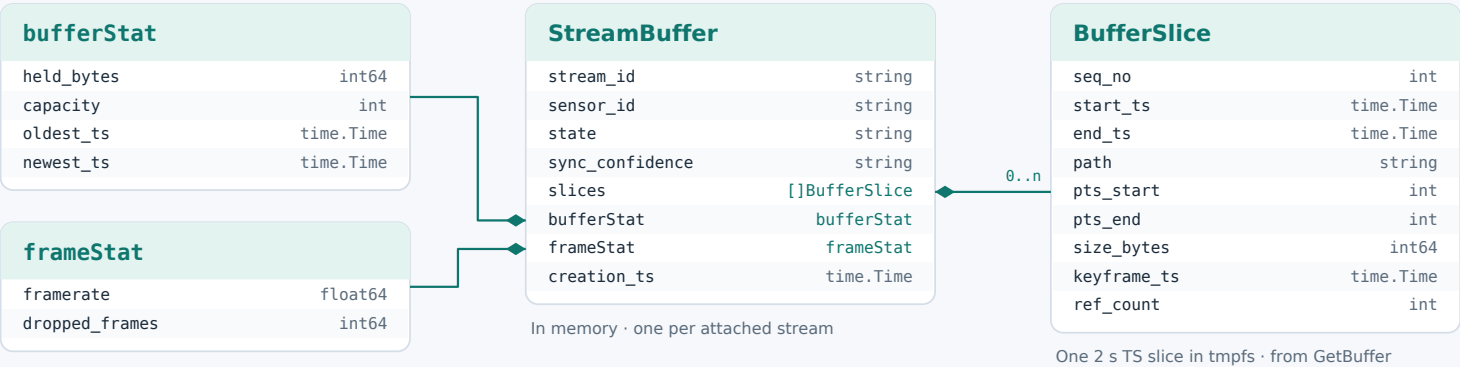

REPLAY

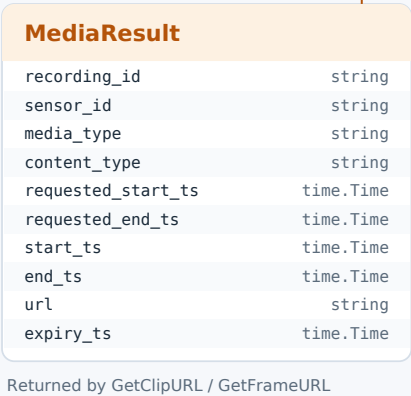

◆ contains → used with / converted to - - → refers to by ID Colored type = another model Source: .data-models.md

Figure 2 · Recording is stored and served; StreamBuffer lives in memory; MediaResult points back to a Recording.

In brief

- Recording is stored as one SQLite row; recordingResponse is its API form, without path and codec.
- StreamBuffer is in memory, one per stream; bufferStat.capacity is in seconds, held_bytes in bytes.
- MediaResult describes a clip or frame and refers to its Recording by recording_id.