



Save it



Like it



Angular Series

ViewChild & ViewChildren



ViewChild

In Javascript we get access to HTML element like this:

```
<h3 id="mainheading">Coder Aishya</h3>
```

```
document.getElementById("mainheading")
```



In Angular we can achieve this using ViewChild

```
@ViewChild("mainheading") mainheading! : ElementRef;
```



Template Reference variable to be accessed via HTML

returns reference to single element that we are accessing

So using ViewChild we can access template and methods of same component as well as child component

```
▼ ElementRef ⓘ  
  ▼ nativeElement: h3  
    accessKey: ""  
    align: ""  
    ariaAtomic: null  
    ariaAutoComplete: null  
    ariaBrailleLabel: null  
    ariaBrailleRoleDescription: null  
    ariaBusy: null  
    ariaChecked: null  
    ariaColCount: null  
    ariaColIndex: null  
    ariaColSpan: null  
    ariaCurrent: null
```



@coder_aishya



ViewChildren

If there are multiple elements of same type and apply some common style to all headings in the application, then we need to use ViewChildren.

```
<h3 id="mainheading">Coder Aishya</h3>  
<h3>Subheading </h3>
```

In Angular we can achieve this using ViewChildren


```
@ViewChildren("childheading") childheading!: QueryList<any>;
```



Template Reference variable to be accessed via HTML

returns reference to QueryList element that we are accessing

It returns multiple elements list

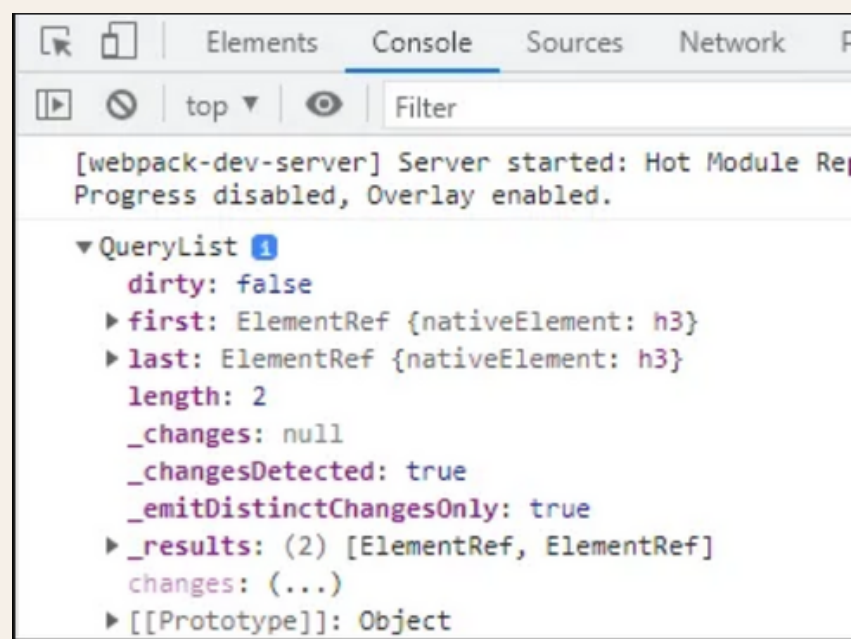


@coder_aishya



Usecase

Suppose I have 3 cards whose background color is green. **On hover background color should change to red.** How to achieve this using Angular?

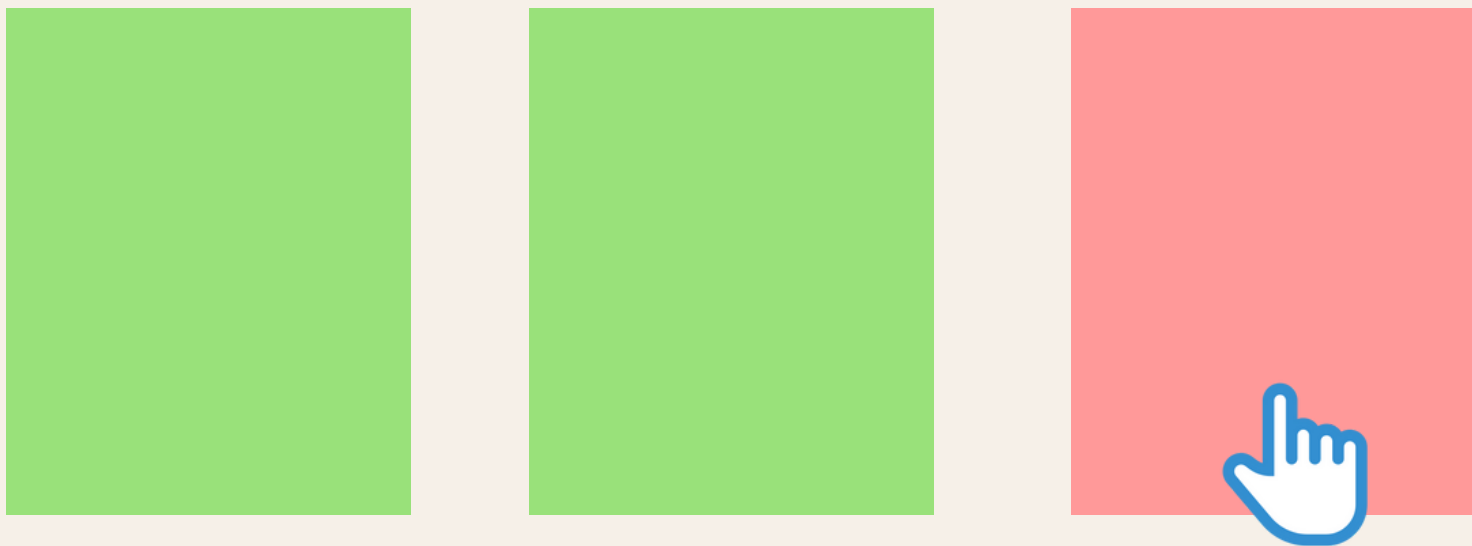

● ● ● app.component.html

```
<div #card class="my-card">Card 1</div>  
<div #card class="my-card">Card 2</div>  
<div #card class="my-card">Card 3</div>
```

#card is the template reference variable that we are mentioning in ViewChildren



@coder_aishya



```
export class AppComponent implements AfterViewInit {  
  
  @ViewChildren('card') cards!: QueryList<ElementRef>;  
  
  ngAfterViewInit() {  
    this.cards.forEach((card) => {  
      const el = card.nativeElement;  
  
      el.addEventListener('mouseenter', () => {  
        el.style.background = 'red';  
      });  
  
      el.addEventListener('mouseleave', () => {  
        el.style.background = 'green';  
      });  
    });  
  }  
}
```

returns all cardsList

Setting the styles

If we use ViewChild in place of ViewChildren, then we would have got access to only one(first) card element



@coder_aishya



**Follow me for more
frontend related Content**



coder_aishya



aishwarya-dhuri

