

01


05


Control Flow and Property Binding Component

Let's swipe now



Ardianto Nugroho
Fullstack Developer



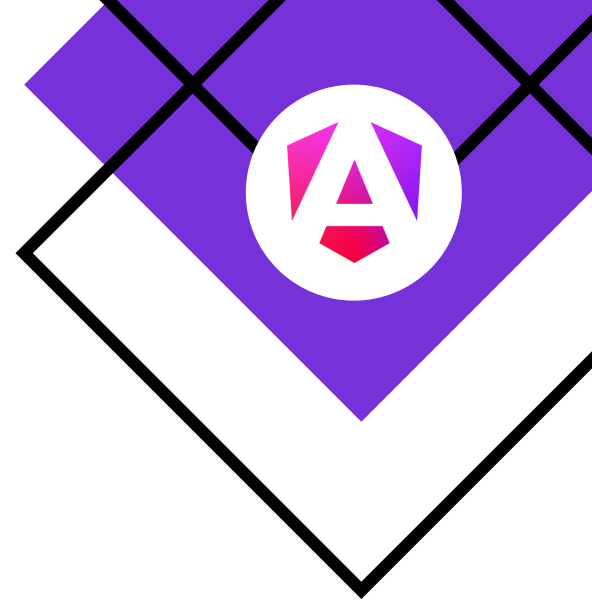


Control Flow in Component


You probably want to control how an element is shown to the user based on certain conditions. Even if you want to reduce repeating the same element in a component.

In this session, you'll learn how to use `@if` and `@for` to solve that problem.



Ardianto Nugroho
Fullstack Developer




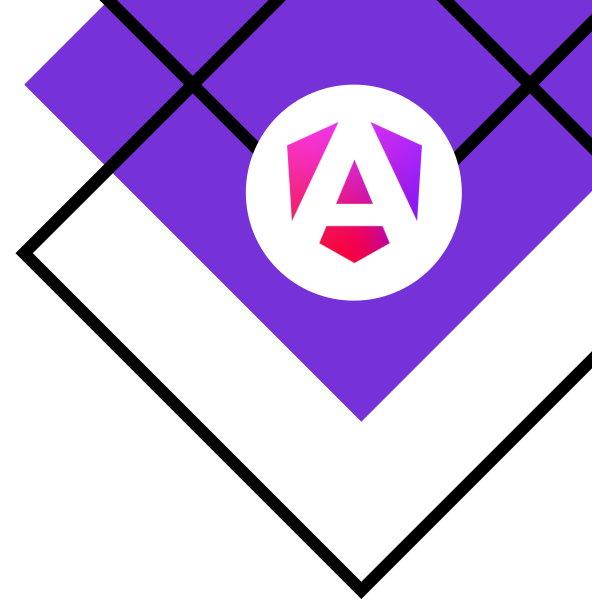


Control Flow in Components - @if



Ardianto Nugroho
Fullstack Developer



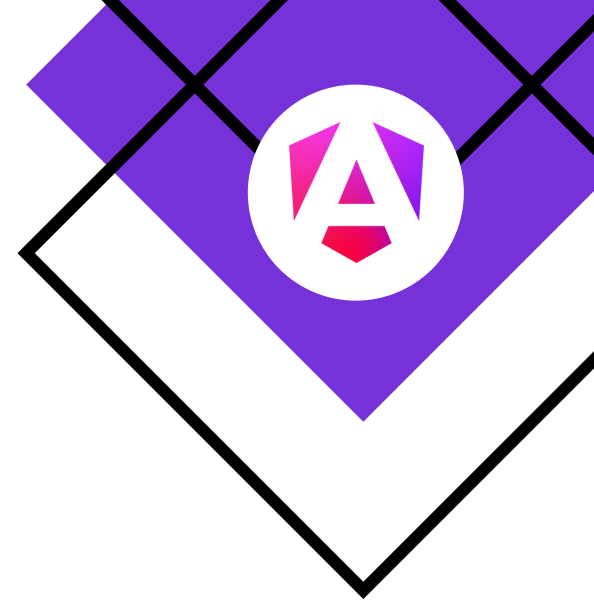


@if template syntax


Everything you want to show to the user is written in the component. But we can also **control** how that component is displayed programmatically. We can set certain conditions so the component shows exactly what we want.

In Angular, we can set conditions in the component using the **@if** template syntax.



Ardianto Nugroho
Fullstack Developer



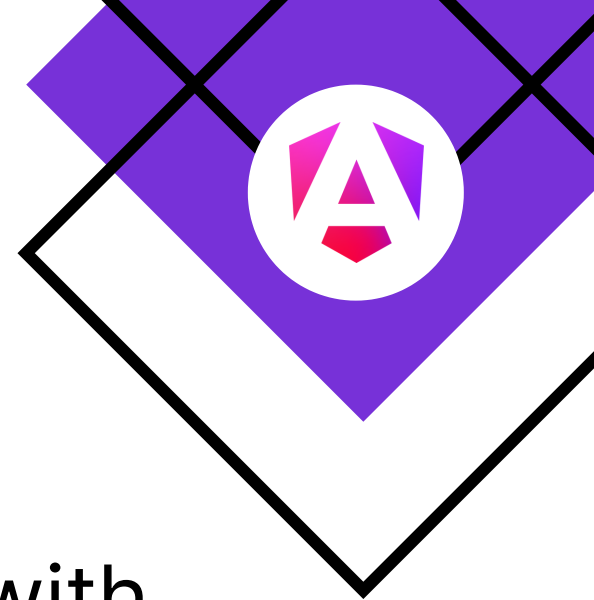


How to Use @if

We can directly use `@if` in the template with the special `@` symbol, which indicates that it's part of Angular's template syntax.

TypeScript


```
1 // Another Code
2 @Component({
3   selector: 'my-first-component-app',
4   template: `@if (isShow) {
5               <h1>Hello Angular!</h1>
6             }`,
7 })
8 export class MyFirstComponent {
9   isShow = true;
10 }
```

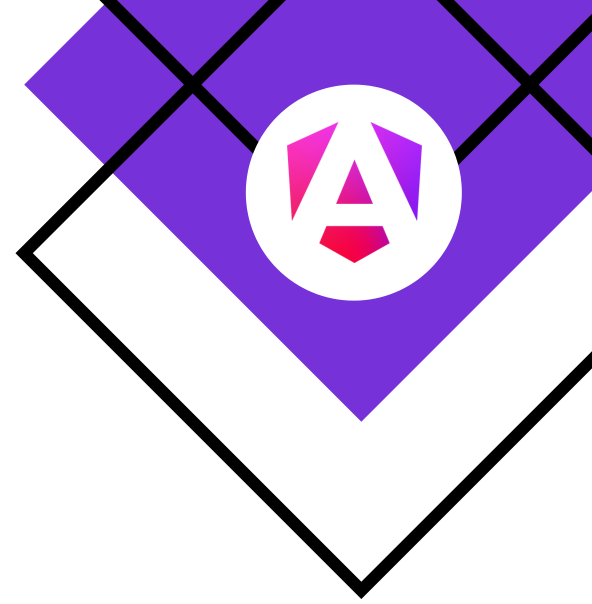


Control Flow in Components - @for



Ardianto Nugroho
Fullstack Developer



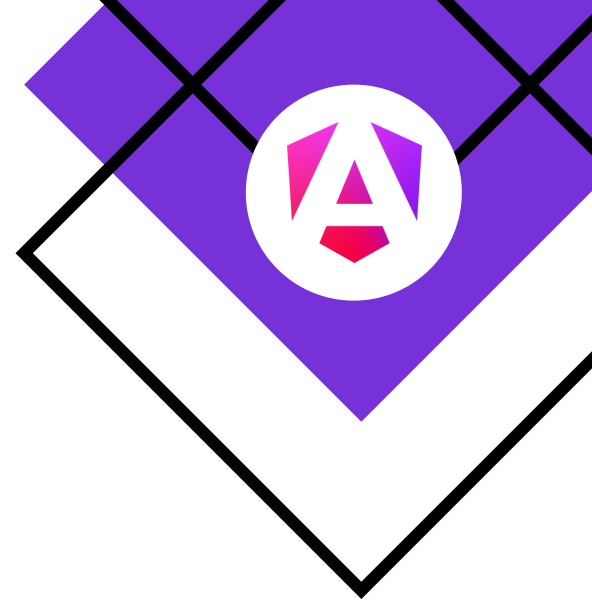


@for template syntax


When you have data in the form of an array and want to display the same elements without rewriting them as many times as the data exists, **@for** is the solution.

With **@for**, you can loop through the elements in a component according to the length of the array.



Ardianto Nugroho
Fullstack Developer



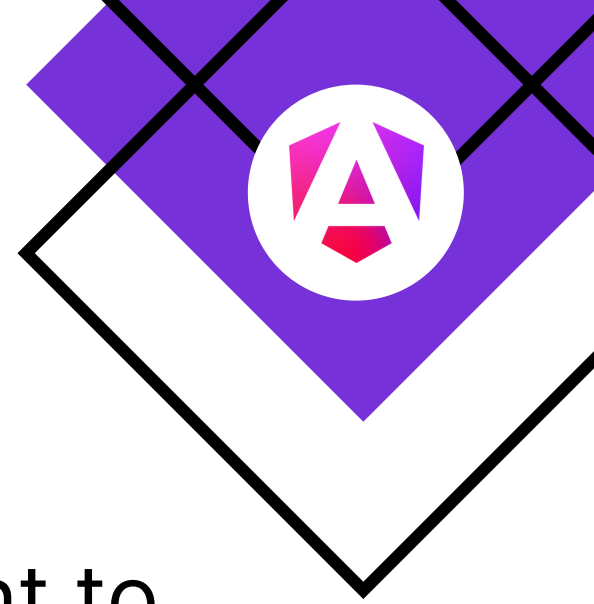


How to Use @for

You can directly use `@for` when you want to iterate over the elements according to the length of the data.

HTML

```
1 <ul>
2     @for(fruit of fruits; track fruit) {
3         <li>{{fruit}}</li>
4     }
5 </ul>
```

The code above will display each `fruit` contained in the `fruits` array.

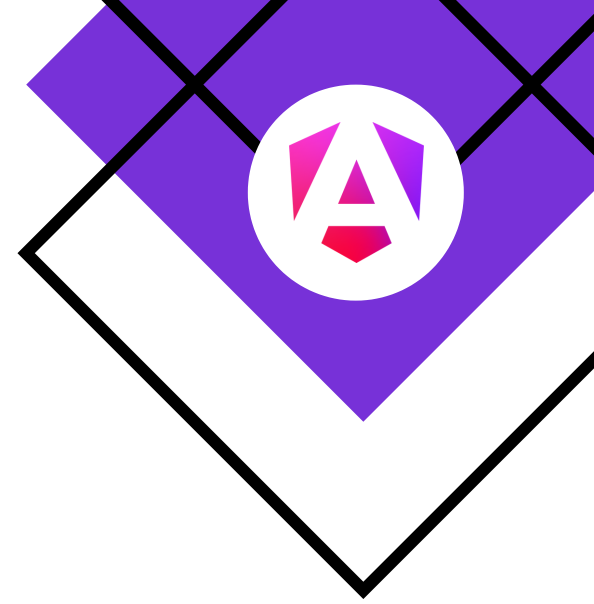



Notes:

The `@if` and `@for` template syntax is available in Angular **v17** and above. If your app is using an earlier version, you should refer to the official documentation since the syntax is a bit different.



Ardianto Nugroho
Fullstack Developer




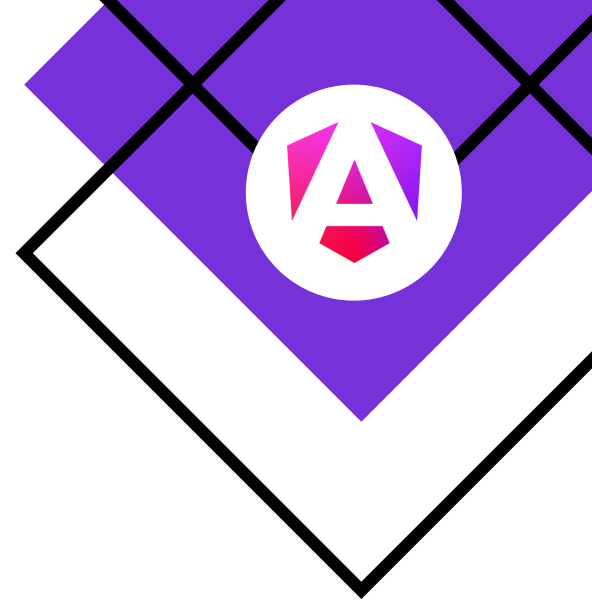


Property Binding Components



Ardianto Nugroho
Fullstack Developer



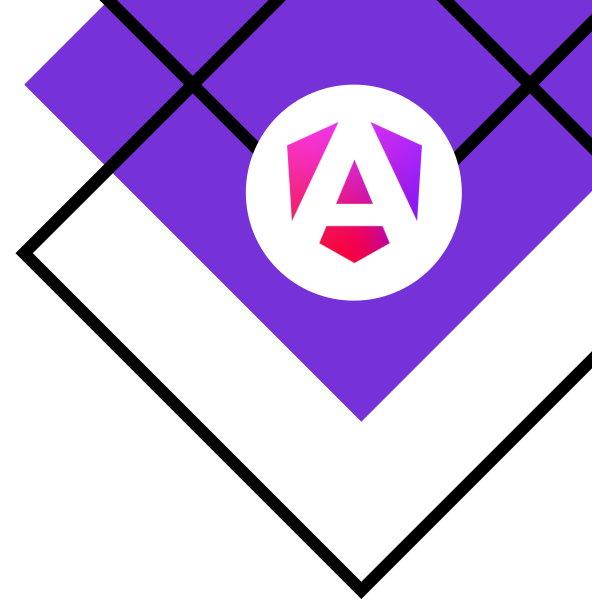


What is Property Binding


You've probably wondered how to **set dynamic values** for attributes or properties on a component.

That's where **property binding** comes in — it's designed to handle exactly that. So let's learn how it works.



Ardianto Nugroho
Fullstack Developer



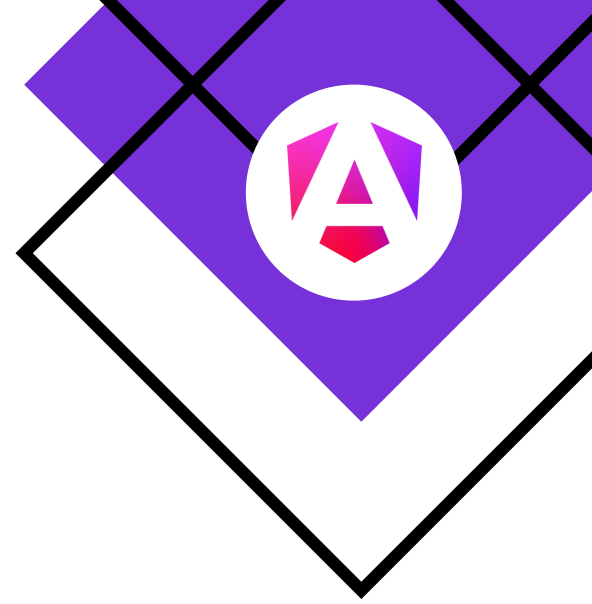

How to use it?

To bind to an element, you can wrap the attribute name in square brackets ([...]):


HTML

```
1 <img alt="flower" [src]="imageUrl"/>
```

In that example, the value of the `src` attribute is dynamic — it comes from the `imageUrl` property. Whenever you change that property, the `src` attribute **updates automatically** as well.



Ardianto Nugroho
Fullstack Developer





Like, save, and share if this post is helpful

Don't hesitate to share your thoughts in the comments or DM me anytime!



Ardianto Nugroho
Fullstack Developer