

CSS repeat() Function



The `repeat()` function is used to quickly create grid columns or rows, by repeating a pattern of track size a number of times.

Its syntax is as follows:

```
1 | .grid {  
2 |   grid-template-columns: repeat(<count>,  
   |   <track-list>);  
3 | }
```

Complete Full-Stack Roadmap



www.thedevspace.io

Fixed repetition

You can repeat a track pattern for a fixed number of times by providing an exact number for `<count>`.

```
1 .grid-fixed {  
2   display: grid;  
3   grid-template-columns: repeat(3, 1fr);  
   /* three equal columns */  
4 }
```

auto-fill vs. auto-fit

Alternatively, you can let the browser to decide how many columns to create.

There are two strategies, `auto-fill` and `auto-fit`.

`auto-fill` fills the space with as many tracks as possible, leaving empty tracks when there are not enough items.


```
1  /* create as many 200px columns as fit
   */
2  .grid-fill {
3      display: grid;
4      grid-template-columns: repeat(auto-
   fill, minmax(100px, 1fr));
5  }
```

`auto-fit` collapses empty tracks so items stretch to fill space.

```
1 .grid-fit {  
2   display: grid;  
3   grid-template-columns: repeat(auto-fit,  
   minmax(100px, 1fr));  
4 }
```

For example:

auto-fill

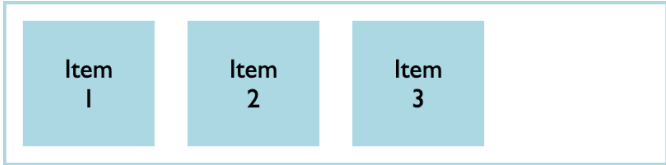

auto-fit



When the container is `400px`,

`auto-fill` creates 4 tracks, each track is `100px`. 1 empty track.

`auto-fit` creates 3 tracks, each track is `400px ÷ 3 = 133.33px`. No empty tracks, expands to fill container.