

HTML

Form Elements


AN OVERVIEW

Full Stack Development Course
for Beginners

www.thedevspace.io

Forms are used to collect user input and send it to a server for processing (like signing up, logging in, or submitting feedback).

HTML offers a collection of elements that allows you to create forms in your web apps.

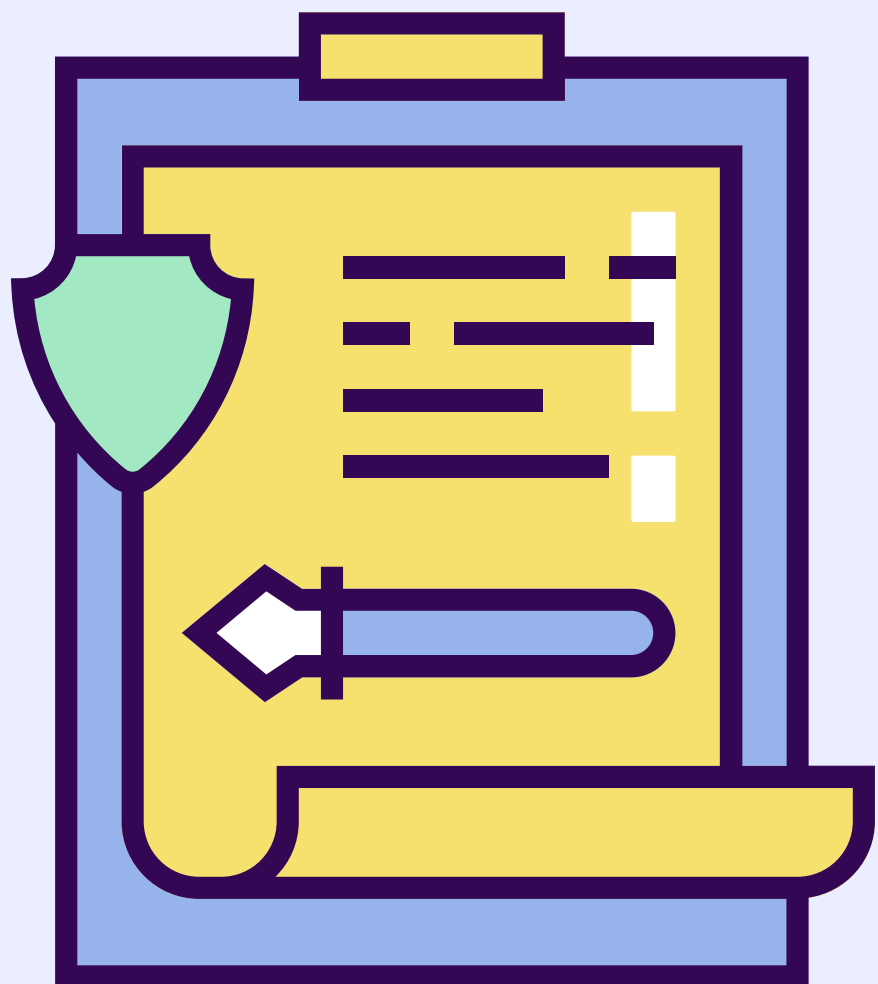

BASIC FORM STRUCTURE

```
<form action="/submit" method="post">
  <!-- Form controls go here -->
</form>
```

- action: URL where the form data is sent.
- method: HTTP method used (GET or POST). GET appends data to the URL; POST sends it in the request body.

TEXT INPUTS

Enter username

```
<input type="text" name="username" placeholder="Enter username" />
```

- type="text": Single-line input for plain text.
- name="username": Key associated with the user input when form is submitted.
- placeholder="Enter username": Placeholder text shown inside the input box until filled.

type="password": Text input that hides the characters.

.....

type="email": Validates the input as a properly formatted email.

Enter email

type="tel": Input for phone numbers; no validation by default.

Enter phone

type="url": Validates input as a properly formatted URL.

Enter URL

type="search": Optimized for search queries, includes an "X" to clear input in certain browsers.

abcdef|




Swipe 

NUMBER & RANGE

```
<input type="number" name="age" min="0" max="120" step="5" />
<input type="range" name="volume" min="0" max="100" value="50" />
```

- type="number": Allows numeric input, with optional min, max, and step.
- min & max: Sets the minimum and maximum value.
- step: Defines individual intervals for number input. When step="5", valid numbers are 5, 10...

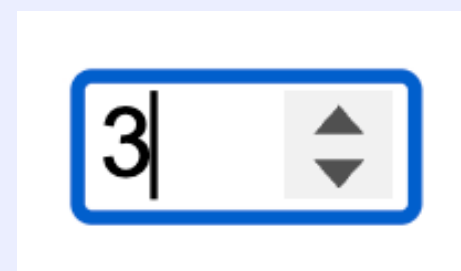


- type="range": Slider input between min and max.
- value: Current value that will be sent upon form submission.

DATE & TIME INPUTS

```
<input type="date" name="birthdate" />
```

type="date":
Selects a date via
calendar.

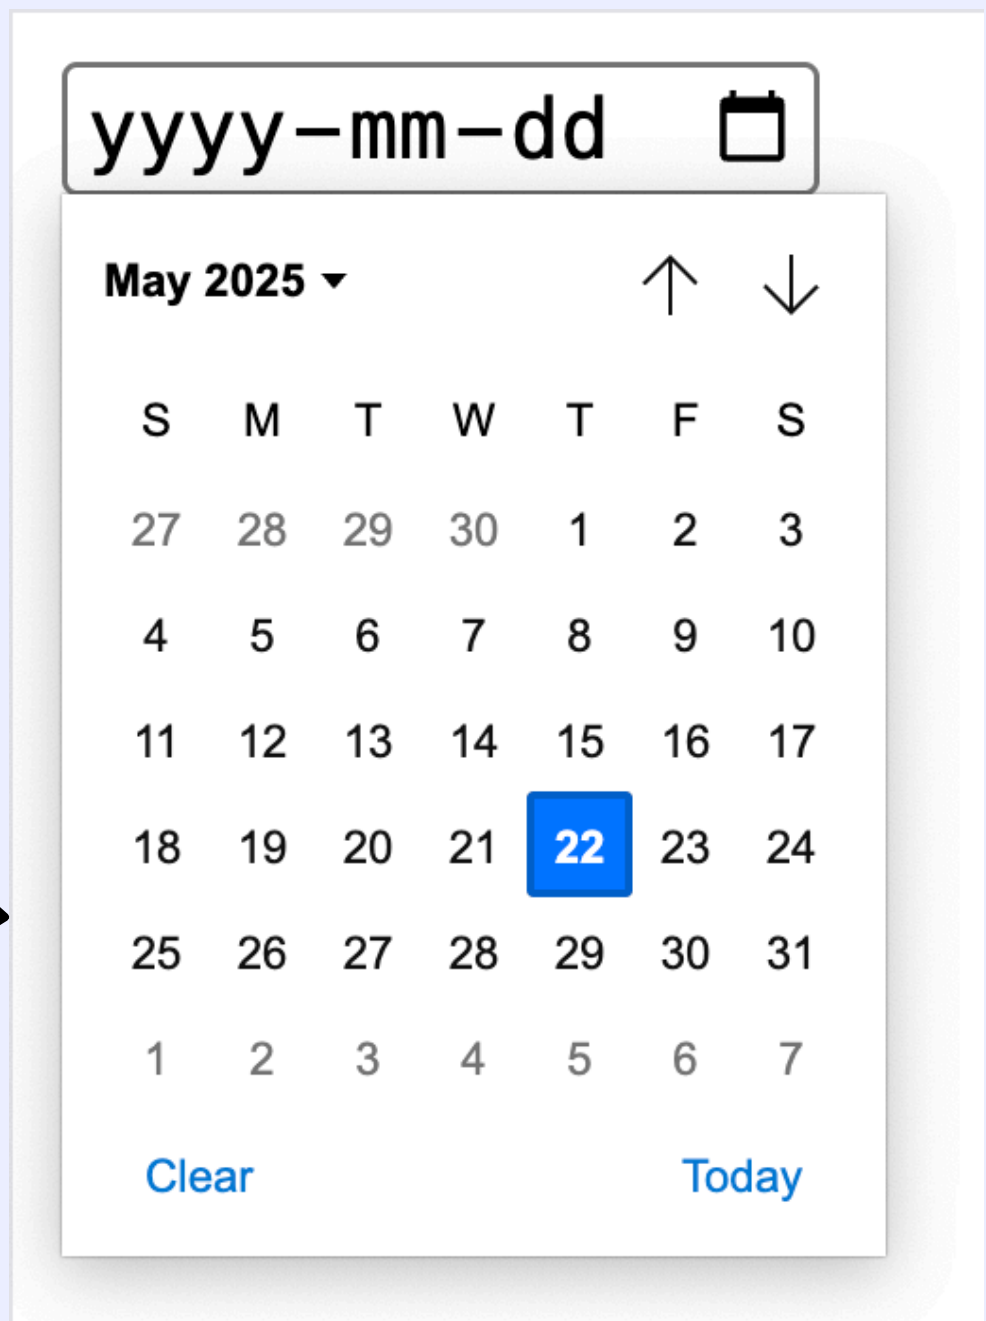


yyyy-mm-dd						
May 2025						
S	M	T	W	T	F	S
27	28	29	30	1	2	3
4	5	6	7	8	9	10
11	12	13	14	15	16	17
18	19	20	21	22	23	24
25	26	27	28	29	30	31
1	2	3	4	5	6	7


Clear Today

type="time": Time input (HH:MM format).


type="datetime-local": Both date and time, without timezone.

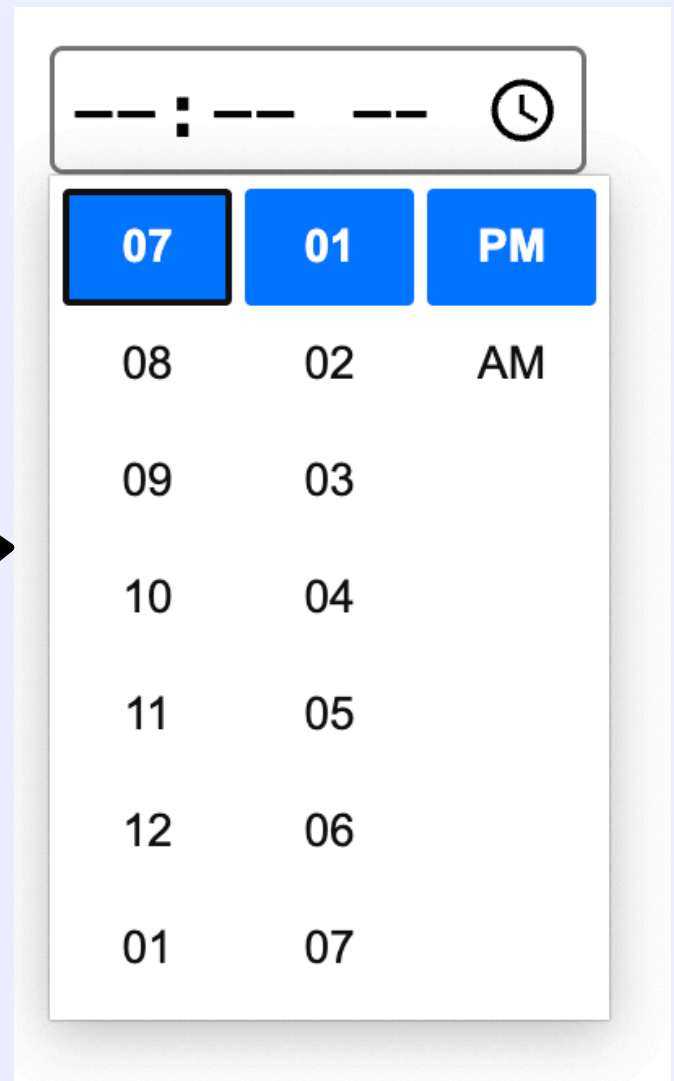


A time input UI showing a clock icon in the header. Below it, there are three blue buttons: '07', '01', and 'PM'. Below these buttons is a list of time options in two columns: 08, 09, 10, 11, 12, 01 in the first column, and 02, 03, 04, 05, 06, 07 in the second column. The 'AM' label is to the right of the second column.

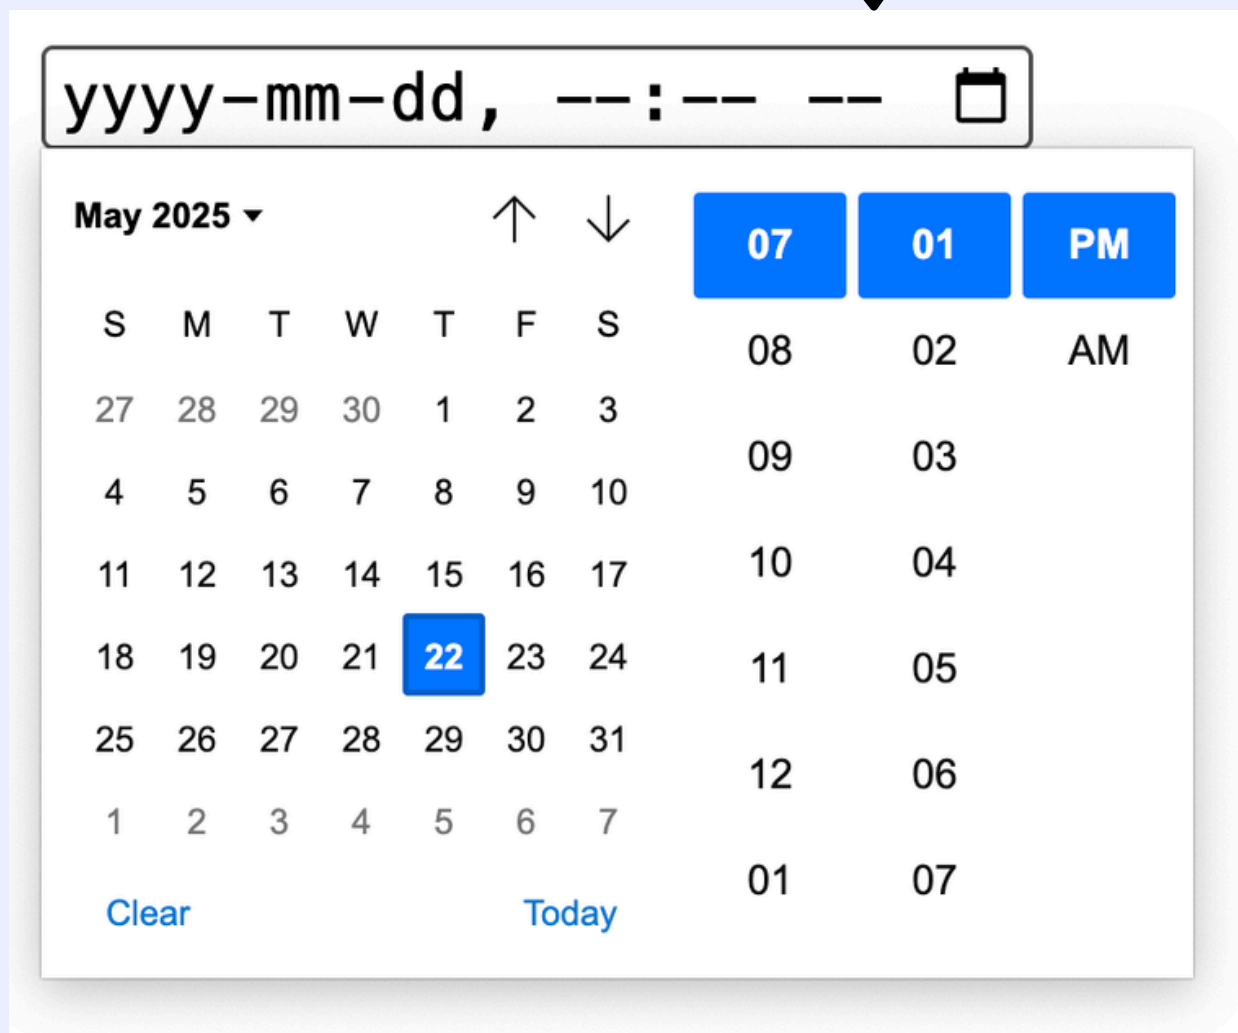

A datetime-local input UI showing a date and time input field with a calendar icon. Below the input field, there is a calendar for May 2025. The calendar has a grid of days from 27 to 31. The day 22 is highlighted in blue. To the right of the calendar, there are three blue buttons: '07', '01', and 'PM'. Below these buttons is a list of time options in two columns: 08, 09, 10, 11, 12, 01 in the first column, and 02, 03, 04, 05, 06, 07 in the second column. The 'AM' label is to the right of the second column. At the bottom left, there are two links: 'Clear' and 'Today'.


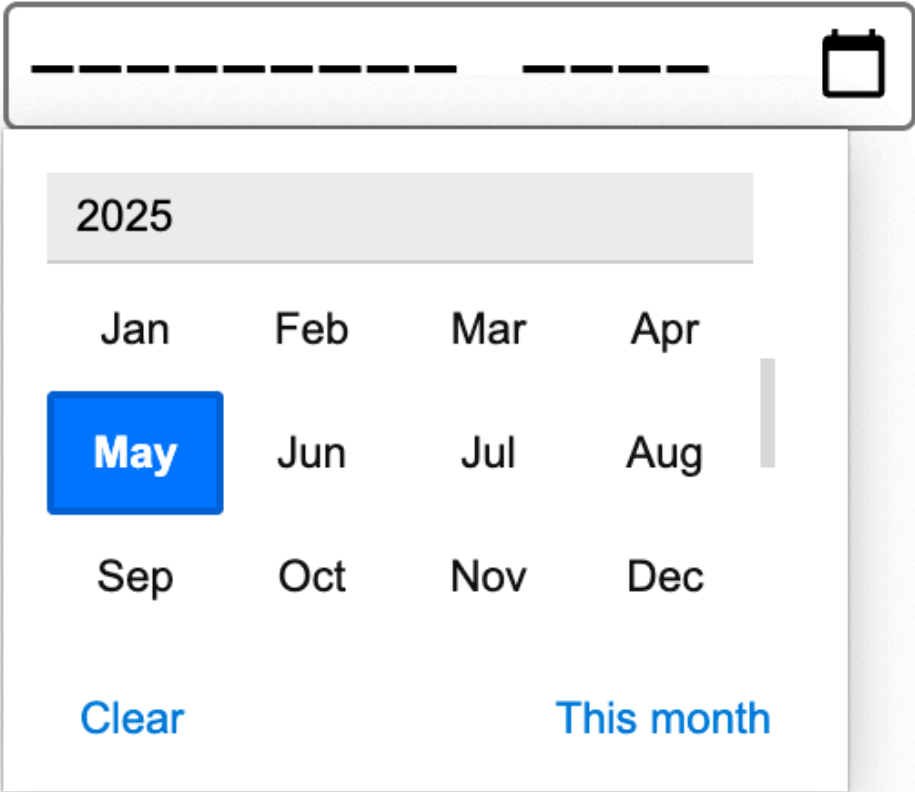


A calendar interface for selecting a month and year. At the top, there is a header bar with a dashed line and a calendar icon. Below this, the year "2025" is displayed in a light gray box. The months of the year are arranged in a 3x4 grid: Jan, Feb, Mar, Apr; May, Jun, Jul, Aug; Sep, Oct, Nov, Dec. The "May" button is highlighted in blue. At the bottom, there are two links: "Clear" and "This month".

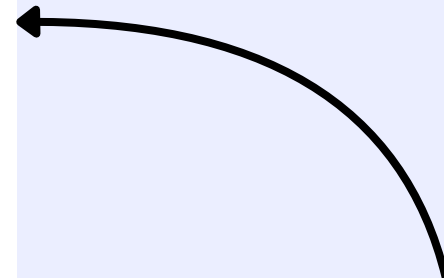

type="month":
Selects a month
and year.

type="week":
Selects a week
number of a year.

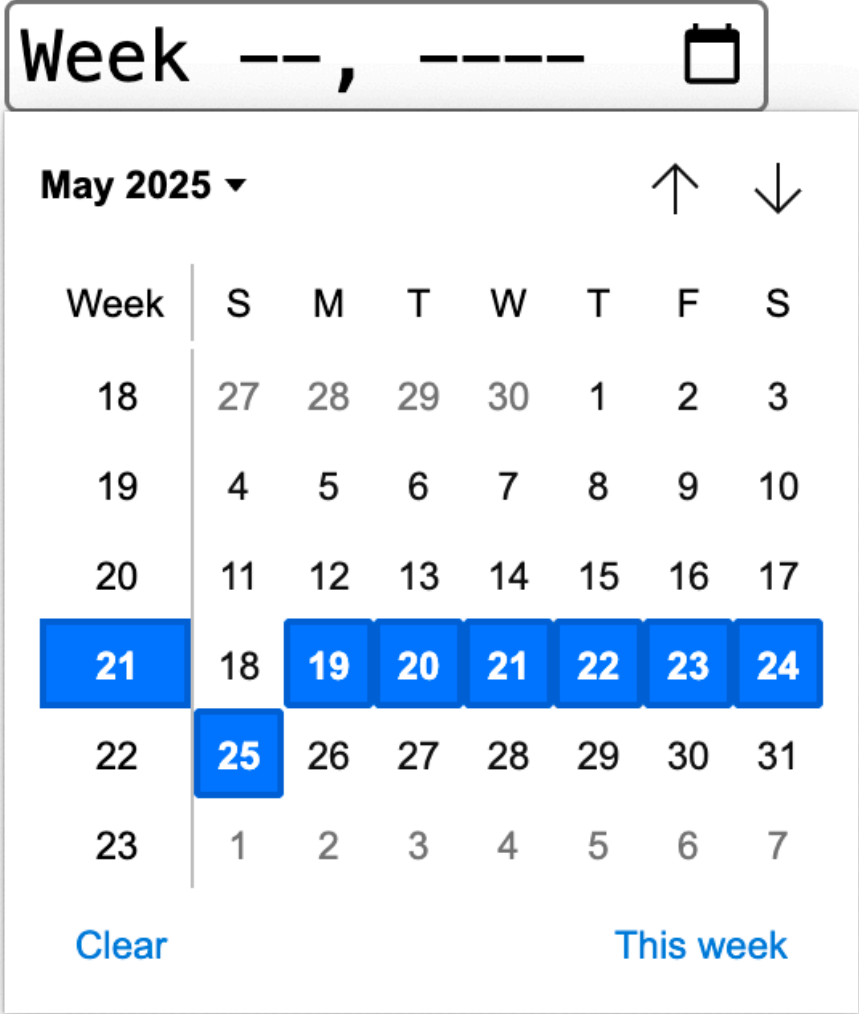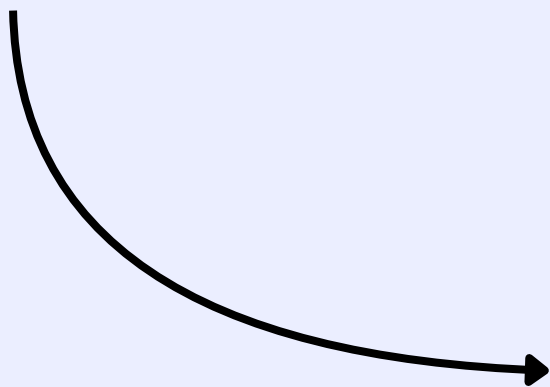

A calendar interface for selecting a week number of a year. At the top, there is a header bar with the text "Week --, ----" and a calendar icon. Below this, the month "May 2025" is displayed with a dropdown arrow. To the right of the month are two arrows, one pointing up and one pointing down. The calendar grid shows the days of the week (S, M, T, W, T, F, S) and the week numbers (18, 19, 20, 21, 22, 23). The week number "21" is highlighted in blue, and the days "19, 20, 21, 22, 23, 24" are also highlighted in blue. At the bottom, there are two links: "Clear" and "This week".

SELECTION CONTROLS

```

<!-- Checkbox -->
<input type="checkbox" name="interests" value="coding" /> Coding
<input type="checkbox" name="interests" value="music" /> Music

<!-- Radio Button -->
<input type="radio" name="pet" value="dog" /> Dog
<input type="radio" name="pet" value="cat" /> Cat

```

☐ Dog ☒ Cat

Radio Buttons allow only one option to be selected per group, which is specified by name. Radios that have the same name are considered to be in the same group.

Checkboxes allow multiple selections. Each selected checkbox sends its value.

☒ Coding ☐ Music

DROPDOWN MENU

```
<select name="country">
  <option value="">Select a country</option>
  <option value="us">USA</option>
  <option value="ca">Canada</option>
</select>
```

- select: Defines the dropdown menu.
- option: Defines each choice; value is what gets submitted.

Select a country ▼

✓ Select a country
USA
Canada

TEXTAREA

```
<textarea  
  name="message"  
  rows="4"  
  cols="30"  
  placeholder="Your message"  
></textarea>
```

- Defines a multiline text input.
- rows/cols: Controls visible size.
- placeholder: Hint text shown when empty.



FILE UPLOAD

```
<input type="file" name="resume" />
<input type="file" name="photos" multiple />
```

- type="file": Lets users select files.
- multiple: Allows selection of multiple files.

Choose File No file chosen

Choose File Lorem ipsu...met (48).png

One file selected

Choose Files 4 files

Multiple files selected

BUTTONS

```
<button type="submit">Submit</button>
<button type="reset">Reset</button>
<button type="button" onclick="alert('Clicked!')">Click Me</button>
```

- type="submit": Submits the form.
- type="reset": Resets form fields to initial values.
- type="button": Custom behavior (often used with JavaScript).



HIDDEN INPUT

```
<input type="hidden" name="user_id" value="12345" />
```

- Not visible to users but still sent with the form data.
- Often used for passing IDs or tokens.

OTHER COMMON INPUT ATTRIBUTES

Attribute	Description
<u>name</u>	Key used in form data when submitted.
<u>value</u>	Default value of the input.
<u>required</u>	Prevents form submission if the field is empty.
<u>readonly</u>	Field can't be changed but is submitted.
<u>disabled</u>	Field is uneditable and not submitted.
<u>autofocus</u>	Automatically focuses on the input when the page loads.

Full Stack Development Course
for Beginners

www.thedevspace.io