



One-Liners in JavaScript

Powerful Code Snippets Every
Developer Should Know



Quick Solutions



Clever Hacks



Performance



Smart Code



Shuffle an Array

Randomize the order of elements in any array

```
const shuffle = arr =>
  arr.sort(() => Math.random() - 0.5);

// Example usage:
// const numbers = [1, 2, 3, 4, 5];
// console.log(shuffle(numbers)); // [3, 1, 5, 2, 4] (random order)
```

How It Works

This function uses `Array.sort()` with a comparator function that returns a random number between -0.5 and 0.5. This randomizes the sort order, effectively shuffling the array elements.

Perfect for games, quizzes, or any scenario requiring random ordering

Remove Duplicates from Array

Filter out duplicate values with a single line of code

```
const removeDuplicates = arr =>
  [...new Set(arr)];

// Example usage:
// const numbers = [1, 2, 2, 3, 4, 4, 5];
// console.log(removeDuplicates(numbers)); // [1, 2, 3, 4, 5]
```

How It Works

This function leverages the `Set` object to automatically remove duplicates, as Sets only store unique values.

1 2 2 3 4 4 5



1 2 3 4 5

The spread operator `...` converts the Set back into an array.

Perfect for cleaning data, removing duplicates from API responses, or preparing data for display

Swipe →

Check if an Object is Empty

A clean one-liner to verify if an object has no properties

```
const isEmpty = obj =>
  Object.keys(obj).length === 0;

// Usage example:
// console.log(isEmpty({}));           // true
// console.log(isEmpty({a: 1}));       // false
```

How It Works

This function uses `Object.keys()` to get an array of the object's own enumerable property names. By checking the length of this array, we can determine if the object has any properties.

Perfect for form validation, API responses, and data processing

Generate a Random Hex Color

Create dynamic colors for UI theming and design

```
const randomColor = () =>
  '#' + Math.floor(Math.random() *
    16777215).toString(16).padStart(6, '0');

// Example usage:
// console.log(randomColor()); // "#a78bfa" (random color)
// document.body.style.backgroundColor = randomColor();
```

How It Works

This function generates a random hex color by:

- Generating a random number between 0 and 16777215 (FFFFFF in hexadecimal)
- Converting it to a hexadecimal string
- Ensuring it's 6 characters long with leading zeros
- Adding the '#' prefix

Perfect for dynamic theming, data visualization, and design tools

Swipe →

Capitalize First Letter


Make your strings look neat and professional

```
const capitalize = str =>
  str.charAt(0).toUpperCase() +
  str.slice(1);

// Example usage:
// console.log(capitalize('hello')); // 'Hello'
// console.log(capitalize('welcome')); // 'Welcome'
```

How It Works

This function takes a string and returns a new string with the first character capitalized.

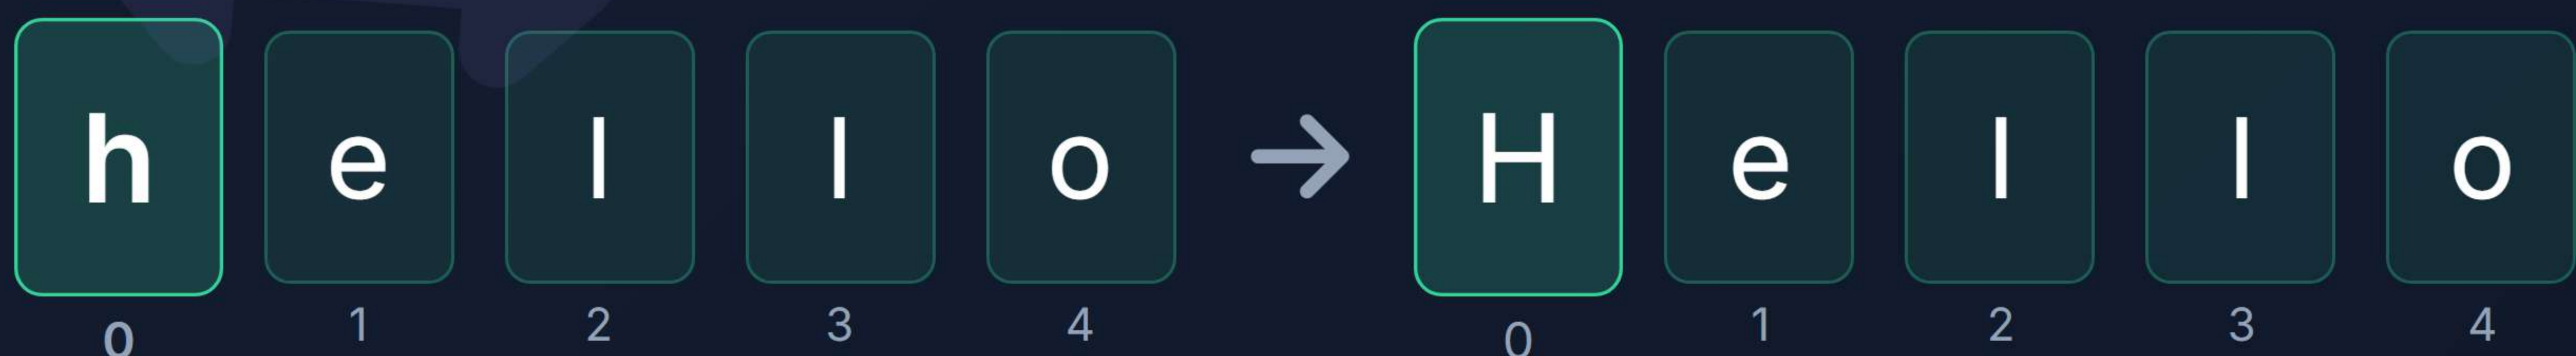

It uses `charAt(0)` to get the first character, `toUpperCase()` to capitalize it, and `slice(1)` to get the rest of the string.

Perfect for formatting names, titles, or any user-generated content

Swipe →

Get Today's Date

Get the current date in YYYY-MM-DD format with one line of code

```
const today = () => new Date().toISOString().split('T')[0];
```

// Example usage:

// console.log(today()); // Outputs: "2025-05-30" (current date)

How It Works

This function gets the current date in the standardized YYYY-MM-DD format, which is:

- ✓ Sortable (alphabetical order matches chronological order)
- ✓ Timezone-independent (uses UTC)
- ✓ Widely supported in databases and APIs

Common Use Cases

- ✓ Logging events with timestamps
- ✓ Default values for date inputs
- ✓ Generating unique filenames
- ✓ API requests requiring date parameters
- ✓ Database queries with date filters

Perfect for clean, standardized date handling in any JavaScript application